Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Proscenic P11 Mopping

Proscenic P11 Mopping Cordless Vacuum Cleaner User Manual

Model: P11 Mopping | Brand: Proscenic

Introduction

The Proscenic P11 Mopping Cordless Vacuum Cleaner is a versatile 2-in-1 wet and dry vacuum and mop combo designed for efficient home cleaning. This manual provides essential information on setting up, operating, and maintaining your device to ensure optimal performance and longevity.

What's in the Box

Carefully unpack all components and ensure all items are present before assembly.

- Main Body (1)
- Telescopic Pipe (1)
- Floor Brush (1)
- Mopping Pad (1)
- Water Tank (1)
- Battery (1)
- Power Adapter (1)
- Wall Mount (1)
- 2-in-1 Dusting Brush (1)
- Crevice Tool (1)
- Air Inlet HEPA (2)
- Roller Brush (1)
- User Manual (1)



Figure 1: All components included in the Proscenic P11 Mopping package.

Setup

1. Assembly

Connect the telescopic pipe to the main body until it clicks into place. Attach the floor brush to the other end of the telescopic pipe. For mopping functionality, attach the water tank with the mopping pad to the floor brush.


100

Figure 2: Fully assembled Proscenic P11 Mopping vacuum.

2. Battery Installation and Charging

Insert the detachable battery pack into the main body until it clicks. Before first use, fully charge the battery using the provided power adapter and wall mount. The LED display will indicate charging status.



Figure 3: Detachable battery for flexible charging.



Figure 4: Wall mount charging setup.

Operating Instructions

1. Powering On/Off and Suction Modes

Press the power button on the main body to turn the vacuum on or off. The LED touchscreen displays battery level and current cleaning mode. Tap the screen to cycle through three cleaning modes: Low, Medium, and High, to adjust suction power for different cleaning needs.



Figure 5: LED touchscreen for easy control and monitoring.

2. Vacuuming

The powerful 550W digital motor provides 45kPa strong suction, effective on both hard floors and carpets. The multi-surface brush design and LED headlights illuminate hidden debris, ensuring thorough cleaning.



Figure 6: Demonstrating 45Kpa powerful suction on a hard floor.

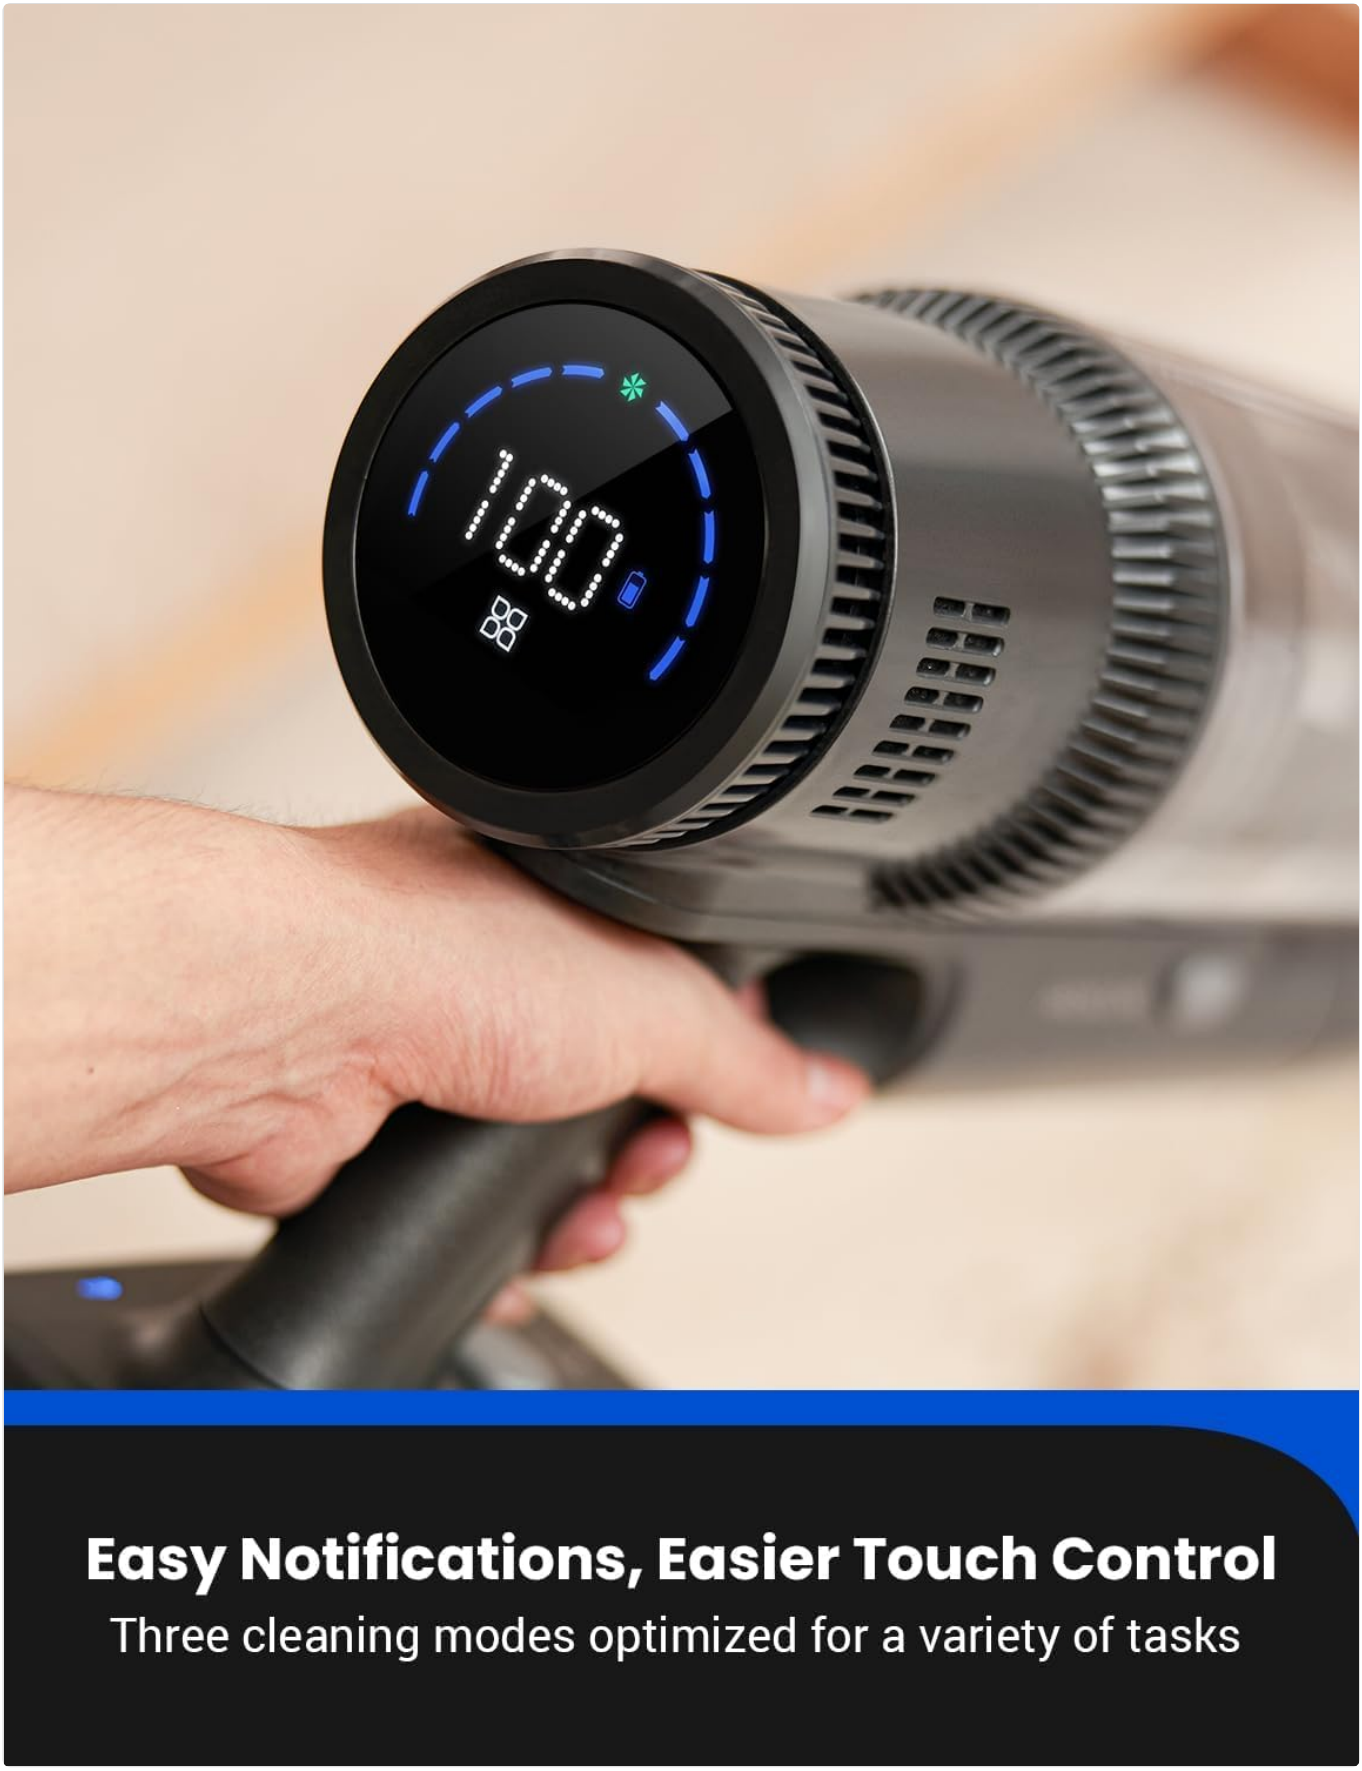


Figure 7: LED lights on the floor brush for enhanced visibility.

3. Mopping Function

To use the mopping function, fill the 340mL water tank with clean water or a suitable floor cleaning solution. Attach the mopping pad to the base. The detachable mopping base allows for simultaneous vacuuming and mopping.



Figure 8: Detachable mopping base for wet and dry cleaning.

4. Handheld Mode

The P11 Mopping quickly transforms into a cordless handheld vacuum. Simply detach the telescopic pipe and attach the 2-in-1 dusting brush or crevice tool for cleaning sofas, upholstery, vents, or car interiors.



Figure 9: Versatile handheld mode for various cleaning tasks.

Maintenance

1. Emptying the Dustbin

Regularly empty the dustbin to maintain optimal suction. Press the release button to detach the dustbin and empty its contents into a trash receptacle.



Figure 10: Easy dustbin emptying process.

2. Cleaning Filters

The vacuum features a five-layer filtration system, including HEPA filters. Periodically remove and clean the filters under running water. Ensure they are completely dry before reinserting to prevent damage and maintain filtration efficiency.



Figure 11: Five-layer filtration system for cleaner air.



Figure 12: Cleaning the HEPA filter.

3. Cleaning the Mopping Pad

After mopping, detach the mopping pad from the water tank and wash it thoroughly. It is reusable and can be hand-washed or machine-washed according to care instructions.

Troubleshooting

Problem	Possible Cause	Solution
No Power / Not Turning On	Battery not charged; Battery not properly installed.	Charge the battery fully; Reinstall the battery securely.
Low Suction Power	Dustbin full; Filters clogged; Obstruction in brush roll or pipe.	Empty dustbin; Clean filters; Remove any obstructions.
Mopping Function Not Working	Water tank empty; Mopping pad not attached correctly.	Refill water tank; Ensure mopping pad is securely attached.
Brush Roll Not Spinning	Hair or debris tangled; Brush roll jammed.	Clean brush roll, remove tangled hair/debris.

Specifications

Feature	Detail
Brand	Proscenic
Model Name	P11 Moppoing
Special Feature	Wet/Dry, Lightweight, Cordless, Headlight, HEPA Filtration
Filter Type	Foam, HEPA Filter
Is Cordless?	Yes
Capacity	1000 Milliliters (Dustbin), 340 mL (Water Tank)
Wattage	550 watts
Runtime	55 minutes
Charging Time	4 Hours

Feature	Detail
Recommended Uses For Product	Car, Pet Hair, Handheld, Home
Form Factor	Stick
Color	Gray
Product Dimensions	13"L x 4.7"W x 9"H
Battery Description	Lithium-Ion
Noise Level	68 dB
Item Weight	4.29 pounds

Warranty and Support

For warranty information and customer support, please refer to the official Proscenic website or the warranty card included in your product packaging. You can also contact Proscenic customer service for assistance with any product-related inquiries or issues.

Online Support: Visit the official Proscenic website for FAQs, troubleshooting guides, and contact information.

Email Assistance: Available 24/7 for detailed inquiries.

Live Chat Support: For instant assistance during business hours.

Technical Support: Lifetime technical support is provided for your product.

© 2025 Proscenic. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0D472QY9G

More documents and user manuals: **https://manuals.plus/**