

[Manuals.plus](#) /

› [JONYJ](#) /

› JONYJ LT-156 Cordless Handheld Vacuum Cleaner User Manual

JONYJ LT-156

JONYJ LT-156 Cordless Handheld Vacuum Cleaner User Manual

Model: LT-156

1. INTRODUCTION

Thank you for choosing the JONYJ LT-156 Cordless Handheld Vacuum Cleaner. This manual provides essential information for the safe and efficient operation, maintenance, and troubleshooting of your new device. Please read it thoroughly before first use and keep it for future reference.

2. SAFETY INSTRUCTIONS


- Read all instructions before using the appliance.
- Do not use the vacuum cleaner outdoors or on wet surfaces.
- Do not allow children to operate the vacuum cleaner. Close supervision is necessary when used near children.
- Do not pick up flammable or combustible liquids, such as gasoline, or use in areas where they may be present.
- Do not pick up anything that is burning or smoking, such as cigarettes, matches, or hot ashes.
- Do not use without dust cup and filters in place.
- Turn off the appliance before connecting or disconnecting the battery charger.
- Use only the charger supplied by the manufacturer to recharge.
- Store the vacuum cleaner indoors in a cool, dry place.

3. PACKAGE CONTENTS

Verify that all items are present in the package:

- Vacuum Cleaner
- Instruction Manual
- Type-C Charging Cable
- HEPA Filter (2 pieces)

- Metal Filter
- Brush Suction Nozzle
- Long Suction Nozzle
- Extended Hose



EXTENDED HOSE

Suitable for cleaning all kinds of hard-to-reach corners, such as behind sofas, between bookshelves, etc



Image: The JONYJ LT-156 Handheld Vacuum Cleaner and its included accessories, including the main unit, various nozzles, filters, and charging cable.

4. PRODUCT OVERVIEW

The JONYJ LT-156 is a powerful and portable cordless handheld vacuum cleaner designed for versatile cleaning tasks in your home, car, or office. It features a robust motor and efficient filtration system.

Key Features:

- **16000PA Powerful Suction:** Equipped with an advanced high-performance motor, providing 16kPa suction and 72,000 RPM high-speed rotation for thorough cleaning.
- **Lightweight & Ergonomic Design:** Weighing just 1.7 lbs, its ergonomic handle and cordless design offer effortless maneuverability.
- **Built-in LED Light:** Illuminates dark corners and crevices to reveal hidden dust.
- **Dual Filtration System:** Features a washable and reusable HEPA filter and a metal filter, intercepting 99.99% of particles.
- **400ml Large Dust Cup:** Designed for one-click emptying for convenient waste disposal.
- **Type-C Fast Charging:** Built-in 7800mAh high-capacity battery, fully charged in 3.5 hours, offering up to 30 minutes of runtime.



Image: The JONYJ LT-156 Handheld Vacuum Cleaner showcasing its 16000PA strong suction power and cyclonic vacuuming technology.



Image: The JONYJ LT-156 Handheld Vacuum Cleaner highlighting its lightweight design (1.7 lbs) and ergonomic handle for comfortable use.

5. SETUP AND ASSEMBLY

Your JONYJ LT-156 vacuum cleaner comes with various nozzles to suit different cleaning needs. To attach a nozzle:


1. Ensure the vacuum cleaner is turned off.
2. Align the desired nozzle with the suction port of the vacuum cleaner.
3. Push firmly until it clicks into place.

Nozzle Types:

- **Long Suction Nozzle:** Ideal for reaching tight crevices and narrow spaces like car seats, sofa gaps, or cabinet corners.
- **Brush Suction Nozzle:** Suitable for cleaning dust from cushions, keyboards, air vents, and other delicate surfaces.
- **Extended Hose:** Provides flexibility to clean hard-to-reach areas such as behind sofas or between bookshelves.

MULTI-PURPOSE NOZZLES

For all your cleaning needs

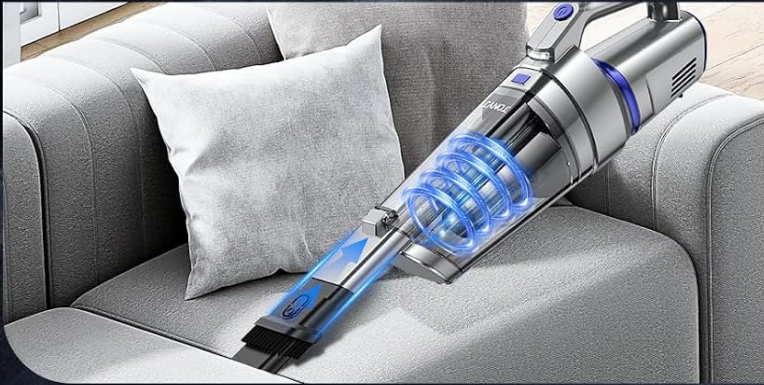

Long Suction Nozzle

Suitable to clean into hard-to-reach corners and tight crevices



Brush Suction Nozzle

Vacuuming while wiping, handling hair and debris with ease



Extended Hose

Easy to bend and stretch, suitable to clean any corner

Image: The JONYJ LT-156 Handheld Vacuum Cleaner demonstrating its multi-purpose accessories, including the long suction nozzle, brush suction nozzle, and extended hose.

6. CHARGING THE VACUUM CLEANER

Before first use, fully charge the vacuum cleaner. The device uses a Type-C fast charging system.

1. Connect the Type-C charging cable to the charging port on the vacuum cleaner.
2. Plug the other end of the cable into a compatible USB power source (e.g., car charger, power bank, adapter, laptop).
3. The indicator light will show charging status. A full charge takes approximately 3.5 hours.
4. Once fully charged, the vacuum cleaner provides up to 30 minutes of continuous runtime.

TYPE-C PORTABLE FAST CHARGING

Meet the charging needs in different scenarios




3.5 Hours
Charging Time



30 Mins
Running Time

7800 mAh

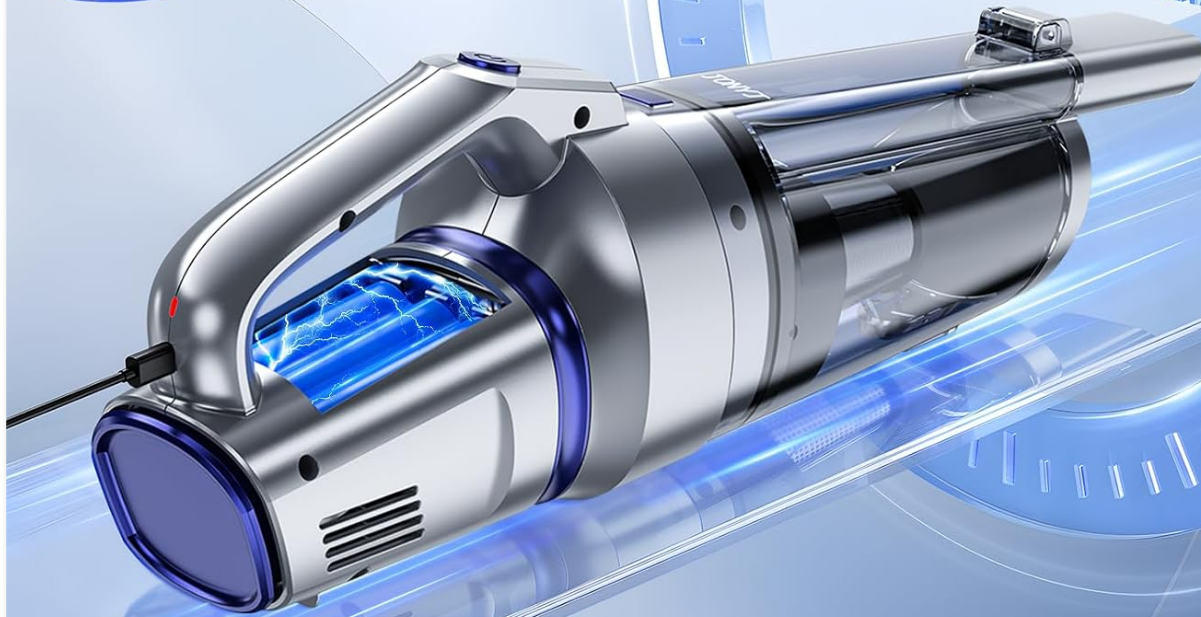

Car



Power Bank



Adapter



Laptop

Image: The JONYJ LT-156 Handheld Vacuum Cleaner connected via its Type-C charging cable, illustrating its fast charging capability and 7800mAh battery.

7. OPERATING INSTRUCTIONS

To operate your JONYJ LT-156 Handheld Vacuum Cleaner:

1. Ensure the vacuum is fully charged and the desired nozzle is securely attached.
2. Press the power button located on the handle to turn on the vacuum cleaner. The LED light will also activate, illuminating the cleaning area.
3. Guide the nozzle over the surface you wish to clean. For optimal suction, maintain close contact with the surface.
4. To turn off the vacuum cleaner, press the power button again.

Your browser does not support the video tag.

Video: An official product video demonstrating the JONYJ Handheld Vacuum Cordless in various cleaning scenarios, highlighting its ease of use and effectiveness.

8. MAINTENANCE

Regular maintenance ensures optimal performance and extends the lifespan of your vacuum cleaner.

Emptying the Dust Cup:

1. Ensure the vacuum cleaner is turned off.
2. Locate the dust cup release button (often near the handle or base of the dust cup).
3. Press the button to detach the dust cup from the main unit.
4. Hold the dust cup over a trash bin and press the one-click emptying button to release collected debris.

Cleaning the Filters:

The JONYJ LT-156 features a dual filtration system with a metal filter and a HEPA filter, both of which are washable and reusable.

1. After emptying the dust cup, carefully remove the metal filter and then the HEPA filter.
2. Rinse both filters under running water until clean. Do not use harsh detergents.
3. Allow the filters to air dry completely before reassembling. Ensure they are **fully dry** to prevent damage and maintain suction power.
4. Reinsert the HEPA filter, then the metal filter, and finally reattach the dust cup to the vacuum cleaner.

EASY TO DISASSEMBLE AND CLEAN



0.4L
Large Dust Cup

HEPA Filter

Metal Filter

1

Open the dust bin and
remove the filters

2

Empty the garbage out
of the dust bin

3

Clean with water and wait
for natural drying

Image: A step-by-step guide showing how to easily disassemble the JONYJ LT-156 Handheld Vacuum, remove filters, empty the dust bin, and clean the components.

72000RPM
HIGH EFFICIENCY MOTOR

72000RPM

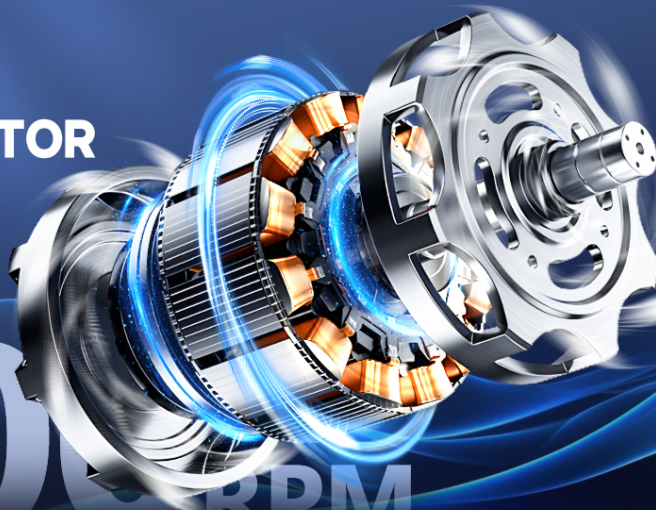


Image: An illustration of the JONYJ LT-156 Handheld Vacuum's dual filtration system, featuring a washable and reusable HEPA filter and a metal filter.

9. TROUBLESHOOTING

If you encounter issues with your JONYJ LT-156, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Vacuum does not turn on	Battery is low or depleted.	Charge the vacuum cleaner fully.
Reduced suction power	Dust cup is full. Filters are clogged. Nozzle is blocked.	Empty the dust cup. Clean or replace filters. Check and clear any blockages in the nozzle or suction path.
Battery not charging	Charging cable or adapter is faulty. Connection is loose.	Ensure the charging cable is securely connected. Try a different compatible Type-C cable and power adapter.
Unusual noise during operation	Blockage in the suction path or motor issue.	Turn off the vacuum and check for any foreign objects in the nozzle or dust cup. If the issue persists, contact customer service.

10. SPECIFICATIONS

Feature	Detail
Brand	JONYJ
Model Name	LT-156
Special Features	Cordless, HEPA, Lightweight, Rechargeable, Washable Filter
Filter Type	HEPA Filter, Metal Filter
Capacity	400 Milliliters
Wattage	120 watts
Recommended Uses	All Floors, Car, Carpet, Furniture, Home, Office
Form Factor	Handheld
Color	Silver & Blue
Product Dimensions	17.4"L x 3.9"W x 5.5"H
Battery Type	Lithium-Ion
Noise Level	75 Decibels
Battery Life	30 minutes
Item Weight	2.67 pounds
UPC	755801806206

11. WARRANTY AND SUPPORT

The JONYJ LT-156 Cordless Handheld Vacuum Cleaner is designed for reliable performance. If you have any questions or require assistance after purchase, please contact JONYJ customer service for support.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0D4YVR6DT>

More documents and user manuals: <https://manuals.plus/>