

LEMEGA M5P+

LEMEGA M5P Internet Radio with CD Player User Manual

Model: M5P+

INTRODUCTION

The LEMEGA M5P is a versatile all-in-one music system designed for home use, offering a wide range of audio playback options. This manual provides essential information for setting up, operating, and maintaining your device.

PACKAGE CONTENTS

- LEMEGA M5P Internet Radio with CD Player
- Owner's Manual
- Power cable
- Remote control

SETUP

1. Unpacking and Placement

Carefully remove all components from the packaging. Place the LEMEGA M5P on a stable, flat surface away from direct sunlight, heat sources, and moisture. Ensure adequate ventilation around the unit.



Figure 1: LEMEGA M5P unit with remote control.

2. Power Connection

Connect the provided power cable to the DC IN port on the back of the unit and then plug it into a wall outlet.

3. Antenna Connection (FM)

Extend the telescopic antenna located at the back of the unit for optimal FM radio reception.

**FM**

FM RADIO

Enjoy all of your favourite FM stations with superior quality sound. Easy set-up and quick Auto-Scan to access your favorite stations quickly.

Figure 2: Rear panel connections, including the FM antenna.

4. Initial Wi-Fi Setup

Upon first power-on, the unit will guide you through the initial setup process, including connecting to your Wi-Fi network. Use the control knob and buttons on the unit or the remote control to navigate the on-screen menu. Ensure your Wi-Fi password is correct for a successful connection.

OPERATING INSTRUCTIONS

General Controls

The LEMEGA M5P can be operated using the top-mounted control knob and surrounding buttons, or via the included remote control. The display screen provides visual feedback for navigation and current status.



Figure 3: Top control panel for navigation and settings.

The remote control offers convenient access to various functions, including source selection (SRC) and standby (STB). A long press on the top button of the unit can also put it into standby mode.



Figure 4: Remote control for convenient operation.

CD Player Operation

Insert a CD, CD-R, or CD-RW disc into the slot-in CD player. The unit will automatically detect the disc and begin playback. Use the controls to play, pause, skip tracks, or stop playback.

Internet Radio

Access over 30,000 radio stations worldwide via Wi-Fi streaming. Navigate through genres, locations, or search for specific stations using the menu. Save your favorite stations to presets for quick access.



Spotify®



YAYFM
YOUR MUSIC YOUR LIFE

heat
radio



SMART STREAMS

Stream and enjoy over 30,000 radios from local or worldwide by wifi streaming. The built-in Spotify connect allows you to enjoy over 20 millions music tracks from Spotify connect with your smart device as a remote control.

Figure 5: Internet Radio interface showing station information.

Spotify Connect

If you have a Spotify Premium account, you can use Spotify Connect to stream music directly to your LEMEGA M5P. Ensure both your device and the M5P are on the same Wi-Fi network, then select the M5P as the playback device within the Spotify app.

FM Digital Radio

Switch to FM mode to enjoy local FM stations. Use the auto-scan function to find available stations and save up to 40 presets. Adjust the telescopic antenna for best reception.

Bluetooth Connectivity

The M5P supports both Bluetooth receiver and transmitter functions. As a receiver, it allows you to stream music wirelessly from your smartphone or tablet. As a transmitter, it can connect to Bluetooth headphones for personal listening. Ensure your headphones support simple pairing or automatic handshake for successful connection.



Figure 6: Bluetooth functionality for streaming and personal listening.

USB Playback and RCA Port

Connect a USB stick to the USB port on the back to play MP3 music files. The RCA port allows for connection of external audio devices.

Dual Alarms Clock with Snooze

Set two independent alarms for different times or days (working days/weekend). You can choose to wake up to music or a buzzer. The snooze function provides extra minutes of sleep after the alarm sounds.



DUAL ALARMS CLOCK/SLEEP/SNOOZE

Dual independent alarms to schedule your alarms/snooze/sleep timer, take your favorite radio stations or music as the alarm ringtone to wake you up.

Figure 7: Dual alarm clock feature for personalized wake-up settings.

Audio Settings

Adjust the audio output to your preference using the Bass, Treble, and Loudness controls. A personal equalizer (EQ) is also available for fine-tuning the sound profile.

MAINTENANCE

Cleaning

Wipe the unit with a soft, dry cloth. Do not use abrasive cleaners or solvents, as they may damage the finish. For the display screen, use a microfiber cloth specifically designed for electronics.

CD Care

Handle CDs by their edges to avoid fingerprints. Store discs in their cases when not in use to prevent scratches and dust accumulation. Clean discs with a soft, lint-free cloth wiping from the center outwards.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Unit does not power on.	Power cable not connected securely or power outlet is not active.	Check power cable connection. Try a different power outlet.
No sound from speakers.	Volume is too low, unit is muted, or incorrect audio source selected.	Increase volume. Press the MUTE button on the unit or remote. Ensure the correct source (CD, Internet Radio, FM, Bluetooth, USB, AUX) is selected using the SRC button.
Cannot connect to Wi-Fi.	Incorrect Wi-Fi password, out of range, or network issue.	Double-check Wi-Fi password. Move the unit closer to the router. Restart your router.
CD playback issues (skipping, not reading).	Dirty or scratched disc, or disc inserted incorrectly.	Clean the CD. Try a different disc. Ensure the disc is inserted correctly into the slot.
Bluetooth pairing fails.	Device is too far, not in pairing mode, or already connected to another device.	Ensure the M5P is in Bluetooth pairing mode. Move devices closer. Disconnect from other Bluetooth devices.
Difficulty exiting Standby (STB) mode.	User unfamiliarity with controls.	Press the STB button on the remote control. If no sound, try pressing STB again or cycling power.

SPECIFICATIONS

Feature	Detail
Product Dimensions	13.9" L x 8.9" W x 5.5" H (35.3 x 22.6 x 14 cm)
Item Weight	11.62 pounds (5.28 kg)
Model Number	M5P+
Color	Light Oak
Connectivity Technology	Auxiliary, Bluetooth, USB, Wi-Fi
Tuner Technology	Internet Radio / FM
Power Source	Corded Electric
Radio Bands Supported	WIFI / FM
Special Feature	Built-In Clock, Dual Alarms, Spotify Connect

OFFICIAL PRODUCT VIDEO



WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the official LEMEGA website or contact their customer service directly. You can also visit the [LEMEGA Brand Store on Amazon](#) for additional resources and contact details.



© 2024 LEMEGA. All rights reserved.

Documents - LEMEGA – M5P



[LEMEGA M5P Music System User Manual - CD, DAB, Internet Radio, Bluetooth](#)

Comprehensive user manual for the LEMEGA M5P Music System. Learn how to set up, operate, and troubleshoot your CD player, DAB radio, internet radio, Bluetooth streamer, and more. Includes safety instructions, control descriptions, connectivity options, and technical specifications.

lang:en score:35 filesize: 30.03 M page_count: 9 document date: 2024-07-22




[\[pdf\] User Manual Owner's Manual Instructions](#)

M5 user manual english 20240402 Administrator M5P Owner s Manual EN Download

7207960b53749799f7eacabebdf80cce lemegaudio d file p 2024 11 07 |||

Safety Safety Instructions Please store this instruction manual for future reference. **WARNING:** To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture. The apparatus shall not be exposed to dripping and splashing and that objects filled with liquids, such as vases, shall not be placed on top of the apparatus. **CAUTION:** The power plug of the apparatus is to be disconnected device. The apparatus shall not be exposed to dripping and splashing. Objects filled with liquids, such as vases, shall not be placed on top of the apparatus. **Do not use the product near water or moisture. Only use the product on a solid surface. Unplug the product from the wall outlet before cleaning. Place it on a soft surface.**

lang:en score:35 filesize: 30.03 M page_count: 9 document date: 2024-07-22

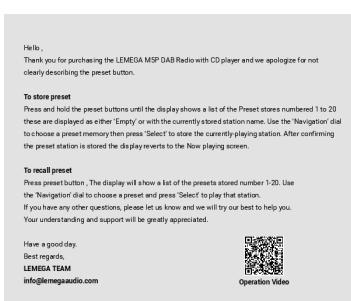

[\[pdf\] Frequently Asked Questions Recall](#)

M5P FAQ LEMEGA All In One 35W Premium Music System CD Player DAB FM Digital Radio WIFI

Internet Spotify Connect Bluetooth Headphone out Clock Alarms Colour Display Remote Control Walnut Electronics Photo 81QYmaOJiVL m media amazon images I |||

Hello , Thank you for purchasing the LEMEGAM5P DAB Radio with CD player and we apologize for not clearly describing the preset button. To store preset Press and hold the preset buttons until the display shows a list of the Preset stores numbered 1 to 20 these are displayed as either Empty or wit...

lang:en score:29 filesize: 433.97 K page_count: 1 document date: 2022-04-09



[\[pdf\] User Manual](#)

Backup of M5 user manual english 20170829 cdr Administrator User Manual LEMEGA M5P All In One 35W Premium Music System CD Player DAB FM Digital Radio WIFI Internet Spotify Connect Bluetooth Headphone out Clock Alarms Colour Display Remote Control Walnut Electronics Photo C1U VzrekGL m media amazon images I |||

Table of content 1 Introduction 1.1 Safety01

1.2 Features03 1.3 Carton contents

.....04 2 Controls, connectors and ...

lang:en score:27 filesize: 6.29 M page_count: 22 document date: 2020-08-17



[pdf] User Manual

M5 user manual english 20170829 cdr Administrator M5P Owner s User

d76bc0c7d912e66768175aa563e9c215 lemegaaudio d file Support Owners 2022 04 07 |||

Table of content 1 Introduction 1.1 Safety01

1.2 Features03 1.3 Carton contents

.....04 2 Controls, connectors and ...

lang:en score:24 filesize: 10.16 M page_count: 20 document date: 2020-08-27