

[Manuals.plus](#) /

> [Pyle](#) /

> Pyle 7-Pad Digital Electric Tabletop Drum Machine Kit Bundle User Manual

Pyle PTED06, PLPTS4.5

Pyle 7-Pad Digital Electric Tabletop Drum Machine Kit Bundle

Model: PTED06 (Drum Machine), PLPTS4.5 (Laptop Stand)

Brand: Pyle

1. INTRODUCTION

This manual provides comprehensive instructions for the setup, operation, and maintenance of your Pyle 7-Pad Digital Electric Tabletop Drum Machine Kit Bundle. This bundle includes the Pyle PTED06 Digital Electric Tabletop Drum Machine and the Pyle PLPTS4.5 Adjustable Heavy Duty Universal Laptop Stand.

Please read this manual thoroughly before using the product to ensure proper function and to prevent damage.



Image 1.1: Pyle 7-Pad Digital Electric Tabletop Drum Machine Kit Bundle, showing the drum machine, two foot pedals, and the adjustable laptop stand.

2. IMPORTANT SAFETY INFORMATION

Observe the following safety precautions to prevent electric shock, short circuit, damage, fire, or other hazards.

- Do not expose the unit to rain, moisture, or excessive humidity.
- Do not place containers with liquids on the unit.
- Do not insert foreign objects into the unit's openings.
- Do not open the unit or attempt to disassemble it. Refer all servicing to qualified personnel.
- Use only the specified power adapter.
- Keep the unit away from heat sources such as radiators, heat registers, stoves, or other apparatus that produce heat.
- Ensure proper ventilation around the unit.
- Unplug the unit during lightning storms or when unused for long periods.

3. PRODUCT COMPONENTS

3.1. Pyle PTED06 Digital Electric Tabletop Drum Machine

The PTED06 drum machine features 7 responsive drum pads and a digital control panel. It is designed to reproduce full drum set sounds with over 300 drum and cymbal tones.

- **7 Drum Pads:** Configured for Snare Drum, Crash Cymbal, High Tom, Hi-Hat, Mid Tom, Low Tom, and Ride Cymbal.
- **2 Digital Foot Pedals:** For Hi-Hat and Kick Bass control.
- **Control Panel:** LCD screen and various buttons for sound customization, recording, editing, and configuration.
- **Connectivity:** USB port for computer connection (MIDI controller functionality), AUX input for external audio devices, Phones/Output jack, DC IN.
- **Power Options:** AC adapter (included) or 6 C batteries (not included) for portable use.



Image 3.1: The Pyle PTED06 drum machine with drumsticks and the two included foot pedals.

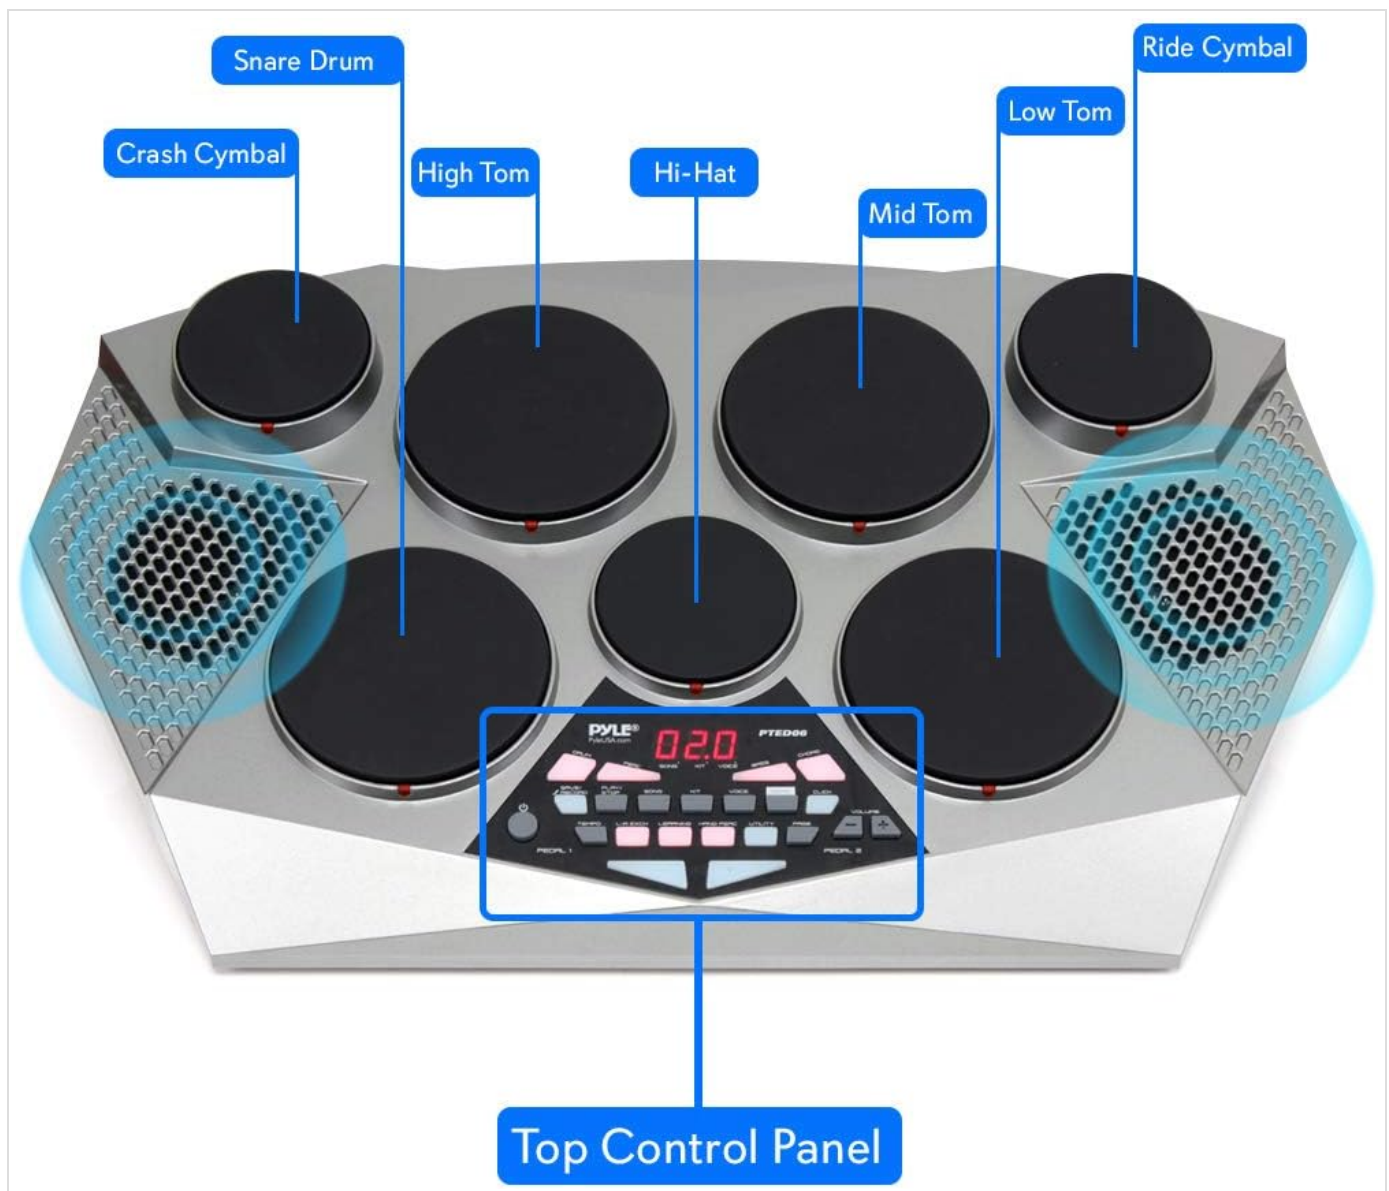


Image 3.2: Detailed view of the Pyle PTED06 drum machine, highlighting the individual drum pads (Snare, Crash, High Tom, Hi-Hat, Mid Tom, Low Tom, Ride Cymbal) and the central control panel.

Make Your Own Music: Connect to Computer & Unlock More



Image 3.3: Rear panel of the Pyle PTED06 drum machine, showing the Pedal inputs, USB port, AUX IN, Phones/Output, and DC IN ports.

3.2. Pyle PLPTS4.5 Adjustable Heavy Duty Universal Laptop Stand

The PLPTS4.5 stand is designed to securely hold the drum machine or other compatible devices. It features a sturdy tripod base and an adjustable platform.

- **Adjustable Height:** Extends from 28 inches to 46 inches high.
- **Platform Dimensions:** 20 inches x 16 inches.
- **Construction:** Rugged and heavy-duty, made with highly durable steel.
- **Versatility:** Suitable for laptops, projectors, music sheets, and other equipment.





Image 3.4: The Pyle PLPTS4.5 adjustable heavy-duty universal laptop stand.

Universal Compatibility

ADAPTABLE FOR MULTIPLE USES



Image 3.5: The Pyle PLPTS4.5 stand illustrating its 20" x 16" platform dimensions and its universal compatibility for various devices such as laptops, projectors, and music sheets.



Image 3.6: Close-up view of the Pyle PLPTS4.5 stand's construction, emphasizing its rugged and heavy-duty design made with durable steel.

3.3. Included Accessories

- Drumsticks
- AC Power Adapter

4. SETUP INSTRUCTIONS

4.1. Setting up the PLPTS4.5 Laptop Stand

1. Unfold the tripod legs of the stand until they are fully extended and stable.
2. Attach the platform to the top of the stand's pole. Ensure it is securely fastened.

3. Adjust the height of the stand by loosening the locking knob on the pole, extending or retracting the pole to the desired height (28" to 46"), and then tightening the locking knob firmly.
4. Place the Pyle PTED06 drum machine onto the platform. Ensure it is centered and stable.

4.2. Connecting the PTED06 Drum Machine

1. Power Connection:

- For AC power: Connect the included AC power adapter to the "DC IN" port on the rear of the drum machine and plug the adapter into a standard wall outlet.
- For battery power: Open the battery compartment on the underside of the drum machine and insert 6 "C" size batteries (not included), ensuring correct polarity.

2. **Foot Pedals:** Connect the two digital foot pedals to the "PEDAL 1" and "PEDAL 2" inputs on the rear of the drum machine. These typically control the Hi-Hat and Kick Bass.

3. **Headphones/External Output:** If desired, connect headphones or an external amplifier/speaker system to the "PHONES/OUTPUT" jack.

4. **AUX Input:** To play along with external audio, connect your audio device (e.g., smartphone, MP3 player) to the "AUX IN" port using an appropriate audio cable (not included).

5. **USB Connection (for MIDI):** To use the drum machine as a MIDI controller with a computer, connect a USB cable (not included) from the drum machine's USB port to your computer.

5. OPERATING INSTRUCTIONS

5.1. Basic Operation

- **Power On/Off:** Locate the power button (usually on the control panel) and press it to turn the unit on or off.
- **Playing Drums:** Strike the drum pads with the included drumsticks to produce sounds. Use the foot pedals for Hi-Hat and Kick Bass.
- **Volume Control:** Adjust the master volume using the dedicated volume controls on the control panel.

5.2. Modes and Features

The PTED06 offers various modes and features accessible via the digital control panel:

- **Drum Kits:**
 - **Preset Kits:** Access 55 pre-programmed drum kits. Use the navigation buttons to browse and select different kits.
 - **Custom Kits:** Create and save up to 10 custom drum kits by assigning different sounds to each pad. Refer to the on-screen menu for detailed instructions on customizing kits.
- **Sounds:** The unit features over 300 individual drum and cymbal tones. These can be assigned to pads when creating custom kits.
- **Songs:** Play along with 120 built-in songs. Select a song and adjust its tempo as desired.
- **Drum Trainer Mode:** Utilize the drum trainer mode to improve your drumming skills. This mode typically provides exercises and feedback.
- **Recording:** The unit allows for recording your performances. Consult the manual's specific section on recording for detailed steps.

- **Metronome:** Use the built-in metronome to practice with a consistent tempo.

5.3. Computer Connectivity (MIDI)

Connecting the PTED06 to a computer via USB allows it to function as a MIDI controller, unlocking more features and possibilities with music software.

- Ensure the drum machine is connected to your computer via a USB cable.
- Your computer should recognize the device as a MIDI input.
- Open your preferred Digital Audio Workstation (DAW) or music software.
- Configure the software to receive MIDI input from the Pyle PTED06.
- You can then use the drum pads to trigger sounds within your software, record MIDI data, and integrate the drum machine into your digital music production workflow.

6. MAINTENANCE AND CARE

- **Cleaning:** Wipe the unit and stand with a soft, dry cloth. Do not use abrasive cleaners, waxes, or solvents.
- **Storage:** When not in use for extended periods, store the unit and stand in a cool, dry place, away from direct sunlight and extreme temperatures.
- **Battery Care:** If using batteries, remove them if the unit will not be used for a long time to prevent leakage.
- **Handling:** Handle the drum machine and stand with care. Avoid dropping or subjecting them to strong impacts.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
No sound from drum machine.	Unit not powered on. Volume too low. Headphones/speakers not connected or faulty. Incorrect output selected (if applicable).	Ensure power adapter is connected or batteries are inserted correctly. Increase master volume. Check headphone/speaker connections and test with another audio source. Verify output settings on the drum machine.
Pads not responding.	Unit not powered on. Sensitivity settings too low.	Ensure unit is powered on. Check and adjust pad sensitivity settings in the menu.

Problem	Possible Cause	Solution
Foot pedals not working.	Pedals not connected properly. Incorrect pedal assignment.	Ensure pedals are fully inserted into the correct "PEDAL" jacks. Verify pedal assignments in the drum machine's settings.
Cannot connect to computer via USB.	USB cable faulty or not connected. Computer drivers not installed (rarely needed for basic MIDI). Software not configured for MIDI input.	Try a different USB cable and ensure secure connection. Restart both the drum machine and computer. Check your music software's MIDI input settings.

8. TECHNICAL SPECIFICATIONS

8.1. Pyle PTED06 Digital Electric Tabletop Drum Machine

- **Drum Pads:** 7 (Snare, Crash, High Tom, Hi-Hat, Mid Tom, Low Tom, Ride Cymbal)
- **Foot Pedals:** 2 (Hi-Hat, Kick Bass)
- **Drum & Cymbal Tones:** 300+
- **Preset Drum Kits:** 55
- **Custom Drum Kits:** 10
- **Built-in Songs:** 120
- **Connectivity:** USB (MIDI), AUX IN, Phones/Output, DC IN
- **Power:** AC Adapter (included) or 6 x 'C' Batteries (not included)
- **Body Material:** Bass Wood
- **Color:** Silver

8.2. Pyle PLPTS4.5 Adjustable Heavy Duty Universal Laptop Stand

- **Adjustable Height:** 28" to 46" (inches)
- **Platform Dimensions:** 20" x 16" (inches)
- **Construction Material:** Highly Durable Steel
- **Color:** Black

9. WARRANTY INFORMATION

Pyle products are designed and manufactured to the highest quality standards. This product is covered by a limited warranty against defects in materials and workmanship. The warranty period and terms may vary by region and product. Please retain your proof of purchase for warranty claims.

For specific warranty details, please refer to the warranty card included with your product or visit the official Pyle website.

10. CUSTOMER SUPPORT

If you encounter any issues or have questions regarding your Pyle 7-Pad Digital Electric Tabletop Drum Machine Kit Bundle that are not addressed in this manual, please contact Pyle customer support.

Website: www.pyleusa.com

Please have your product model numbers (PTED06, PLPTS4.5) and purchase information ready when contacting support.

© 2024 Pyle. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0D6QPQPYB>

More documents and user manuals: <https://manuals.plus/>