



Manuals.plus /

› INTETURE /

› INTETURE BP10 Cordless Vacuum Cleaner User Manual

INTETURE BP10

INTETURE BP10 Cordless Vacuum Cleaner User Manual

Model: BP10 | Brand: INTETURE

1. INTRODUCTION

The INTETURE BP10 Cordless Vacuum Cleaner is designed to provide powerful and efficient cleaning for your home. Featuring a 450W motor and up to 40KPA suction, it effectively tackles various debris from pet hair to fine dust. Its intelligent color touch display and versatile accessories make cleaning convenient and adaptable to different surfaces and needs.



Figure 1: Overview of the INTETURE BP10 Cordless Vacuum Cleaner and included accessories.

2. PACKAGE CONTENTS

Before assembly, please ensure all components listed below are present in your package:

- 1 x Vacuum Main Body

- 1 x 2200mAh Battery
- 1 x Dust Cup (1.5L capacity)
- 1 x Electric Floor Brush with LED Light
- 1 x Tangle-Free Roller Brush (integrated)
- 1 x Telescopic Tube (adjustable length)
- 1 x Crevice Nozzle
- 1 x 2-in-1 Brush
- 1 x Brush Cleaning Tool
- 1 x Charger
- 1 x Wall Mount
- 1 x Instruction Manual (PDF version available [here](#))
- 2 x HEPA Filters (extra gifts)

TRANSFORM INTO A HANDHELD VACUUM

Includes attachments for versatile cleaning



Figure 2: All components included with your INTETURE BP10 Cordless Vacuum Cleaner.

3. SETUP AND ASSEMBLY

3.1 Assembling the Vacuum

1. **Attach the Telescopic Tube:** Insert the telescopic tube into the main vacuum body until it clicks securely into place.
2. **Attach the Floor Brush:** Connect the electric floor brush to the other end of the telescopic tube, ensuring it locks firmly.
3. **Install the Battery:** Slide the 2200mAh battery into the designated slot on the main vacuum body until it clicks.
4. **Charge the Battery:** Before first use, fully charge the battery using the provided charger. A full charge typically takes 4-5 hours.

4. OPERATING INSTRUCTIONS

4.1 Powering On/Off and Suction Modes

To power on the vacuum, press the power button on the handle. The intelligent color touch display will illuminate, showing battery life and current mode. You can switch between three adjustable suction levels (Min, Mid, Max) or select the Intelligent Auto Mode by touching the display screen.

- **Intelligent Auto Mode:** The vacuum automatically adjusts suction power based on the cleaning surface (e.g., higher suction for carpets, lower for hard floors).
- **Manual Mode:** Manually select desired suction level (Min, Mid, Max) for specific cleaning tasks. The screen light will change in real-time as suction power changes.

LED COLORFUL TOUCH SCREEN




Figure 4: The intelligent color touch screen provides real-time information and mode selection.

Your browser does not support the video tag.

Video 1: Demonstration of adjusting suction in auto and manual modes using the touch display.

4.2 Versatile Cleaning with Accessories

The BP10 can be easily transformed into a handheld vacuum or used with its telescopic tube for various cleaning

scenarios:

- **Floor Cleaning:** Use the electric floor brush for hardwood floors, carpets, and tiles. The integrated soft/hard bristles eliminate the need to switch brush heads. Bright LED lights on the brush illuminate hidden dust.
- **High Places:** Extend the telescopic tube to reach ceilings, curtains, and high shelves.
- **Handheld Mode:** Detach the telescopic tube and attach the crevice nozzle or 2-in-1 brush for cleaning car interiors, furniture, keyboards, and tight corners.



Figure 5: The vacuum's adaptability for cleaning high areas, delicate surfaces like keyboards, and car interiors.

Your browser does not support the video tag.

Video 2: Demonstration of adjusting the telescopic tube length for different cleaning needs.

5. MAINTENANCE

5.1 Emptying the Dust Cup

The 1.5L dust cup features a one-touch emptying mechanism for hygienic disposal of collected debris. Simply press the release button over a trash bin to empty the contents.

ONE-TOUCH EMPTYING



Washable



1.5L Large Capacity



Figure 6: One-touch emptying of the dust cup for quick and easy disposal.

5.2 Cleaning Filters

For optimal performance, regularly clean the HEPA filter and stainless steel filter. These filters are washable. Allow them to air dry completely before reinserting into the vacuum.

5.3 Cleaning the Roller Brush

The tangle-free roller brush should be inspected periodically for tangled hair or debris. Remove the brush from the floor head and use the provided brush cleaning tool to remove any obstructions. The roller brush can also be washed with water if heavily soiled, ensuring it is completely dry before reassembly.

SOFT AND HARD BRISTLES INTEGRATED BRUSH



Figure 7: The integrated brush design simplifies cleaning across different surfaces.

6. TROUBLESHOOTING

If you encounter any issues with your INTETURE BP10 Cordless Vacuum Cleaner, please refer to the following common troubleshooting tips:

Problem	Possible Cause	Solution
Vacuum does not turn on.	Battery is not charged or not properly installed.	Ensure battery is fully charged and correctly inserted.
Loss of suction.	Dust cup is full, filters are clogged, or brush roll is obstructed.	Empty dust cup, clean filters, and remove any obstructions from the brush roll.
Brush roll not spinning.	Obstruction in brush roll or motor issue.	Clear any tangled hair or debris from the brush roll. If issue persists, contact customer support.
Short runtime.	Battery not fully charged or operating in Max mode constantly.	Ensure battery is fully charged. Use Auto or Min mode for longer runtime. Consider purchasing an extra battery for extended use.

7. SPECIFICATIONS

Feature	Detail
Brand	INTETURE
Model Name	Cordless Vacuum Cleaner (BP10)
Special Feature	450W Brushless Motor & 40KPA Suction, 55min Runtime, Intelligent Color Touch Screen, Removable 1.5L Dust Cup, Replaceable battery 7 * 2200 mAh, 4H Charging time, Multi-Stage Filtration System, 180° Horizontal / 90° Vertical Rotation Brush with LED Light, Adjustable Extension Tube (40-64cm), Low Noise ≤ 62 dB, Various Brush
Filter Type	HEPA Filter and Stainless Steel Filter
Is Cordless?	Yes
Capacity	1.5 Liters
Wattage	450 watts
Runtime	55 minutes (Min suction)
Maximum Suction	40 KPA
Recommended Uses	Hard Floor, Carpet
Form Factor	Stick
Color	Blue
Product Dimensions	10"L x 7"W x 17"H
Battery Type	Lithium-Ion (7 * 2200 mAh)
Noise Level	≤ 62 dB
Item Weight	7 pounds

8. WARRANTY AND SUPPORT

INTETURE provides a **3-year free warranty** for the BP10 Cordless Vacuum Cleaner. We also offer **7*24 after-sales service** for valued customers after registration, ensuring a high-quality buying experience.

For further assistance, please refer to the comprehensive [User Manual \(PDF\)](#) or contact INTETURE customer support.

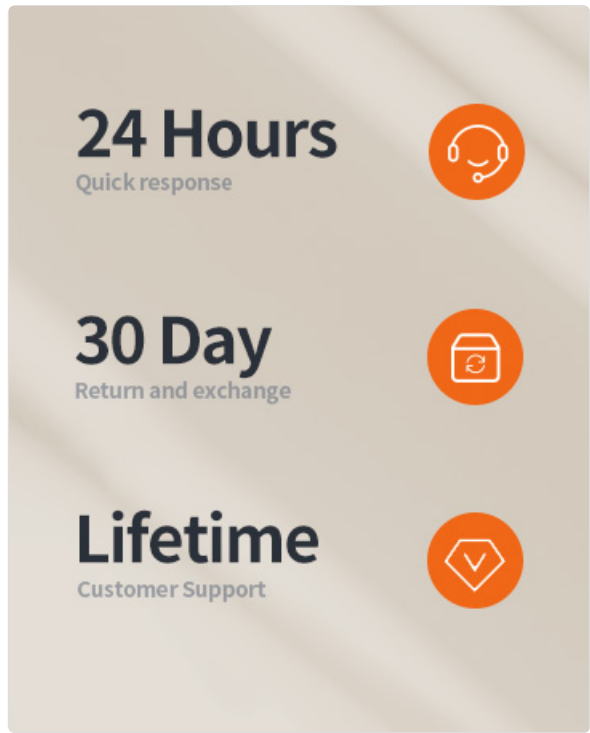


Figure 8: Dedicated customer support is available for assistance.