



[Manuals.plus](#) /

> [ponycam](#) /

> Ponycam BC605 Body Worn Camera Instruction Manual

## ponycam BC605

# Ponycam BC605 Body Worn Camera Instruction Manual

Model: BC605-128G

## 1. INTRODUCTION

This manual provides detailed instructions for the operation and maintenance of your Ponycam BC605 Body Worn Camera. Please read this manual thoroughly before using the device to ensure proper function and to maximize its capabilities.



Image 1: Front and back view of the Ponycam BC605 Body Worn Camera, showing the lens, screen, and controls.

## 2. WHAT'S IN THE BOX

Verify that all items listed below are included in your package:

- Ponycam BC605 Body Worn Camera
- Quick User Guide
- Magnetic Mount
- Clip
- Power Adapter
- USB Data Cable

# BODY WORN CAMERA

Model:BC605



Image 2: All components included in the Ponycam BC605 package: the body camera, USB data cable, power adapter, quick user guide, clip, and magnetic mount.

## 3. PRODUCT DIAGRAM

Familiarize yourself with the various parts and controls of your BC605 Body Worn Camera:



Image 3: Detailed product diagram showing the camera's buttons and ports, including PTT (not supported in this version), IR, Audio record,

## 4. INITIAL SETUP AND CONFIGURATION

---

Before first use, it is recommended to set the correct time and time zone for accurate recording timestamps. This can be done easily by scanning a QR code.

1. **Access Advanced Setup:** Press the menu button on the camera. Navigate to "Advanced Setup" and press the menu button again. A QR code will appear on the camera screen.
2. **Scan QR Code:** Use your smartphone's camera or a QR code scanner app to scan the QR code displayed on the camera's screen.
3. **Configure Settings:** This will direct you to a website ([bmc.netbodycamera.com](https://bmc.netbodycamera.com)) where you can enter the default password (888888) to edit settings such as time zone, time, WiFi information, and APN settings.
4. **Update Camera:** After updating the settings on the website, a new QR code will be generated. Press the return button on the camera and select "QR Scanner". Scan the new QR code with the camera to apply the changes.

Your browser does not support the video tag.

Video 1: A step-by-step guide on how to configure the camera's time, time zone, and other advanced settings using a QR code scan via a smartphone.

## 5. OPERATING INSTRUCTIONS

---

### 5.1 Basic Operations

- **Power On/Off:** Hold the Power button to turn the device on or off.
- **Record Video:** Press the Record button to start or stop video recording. The default resolution is 1080p, with support up to 1440p.
- **Take Photo:** Press the Snap button to take a photo while recording. The camera supports 58MP photo capabilities.
- **Playback:** Press the Playback button to review recorded videos and photos.
- **Menu Navigation:** Use the Menu/OK, Up, and Down buttons to navigate through camera settings.

# Multiple Wearing Methods

## Magnetic Mount



## Short Clip



Image 4: Visual guide for quick operations: Power on/off, Record, Photo, Menu, Playback, and USB data transfer.

## 5.2 Key Features

- **Long Battery Life:** Equipped with a 3600mAh battery, providing up to 17 hours of continuous recording. Fully charges in approximately 3 hours.
- **Night Vision:** Features infrared capability for clear footage in low-light or dark conditions.
- **Loop Recording:** Automatically overwrites the oldest footage with new recordings when memory capacity is reached.
- **Data Encryption:** Protects recordings with encryption technology to ensure data security and tamper-proof evidence.
- **Durability:** IP67 waterproof design and 2-meter drop resistance for use in various environments.

# Continuous Recording 17 Hours

3600mAh high-capacity battery

**17 Hrs**

Recording Time

**48 Hrs**

Standby Time

**3 Hrs**

Charging Time



Image 5: Illustration highlighting the camera's 17-hour continuous recording time and 3600mAh high-capacity battery.

# Easy to configure

Set up by scanning the QR code with your phone

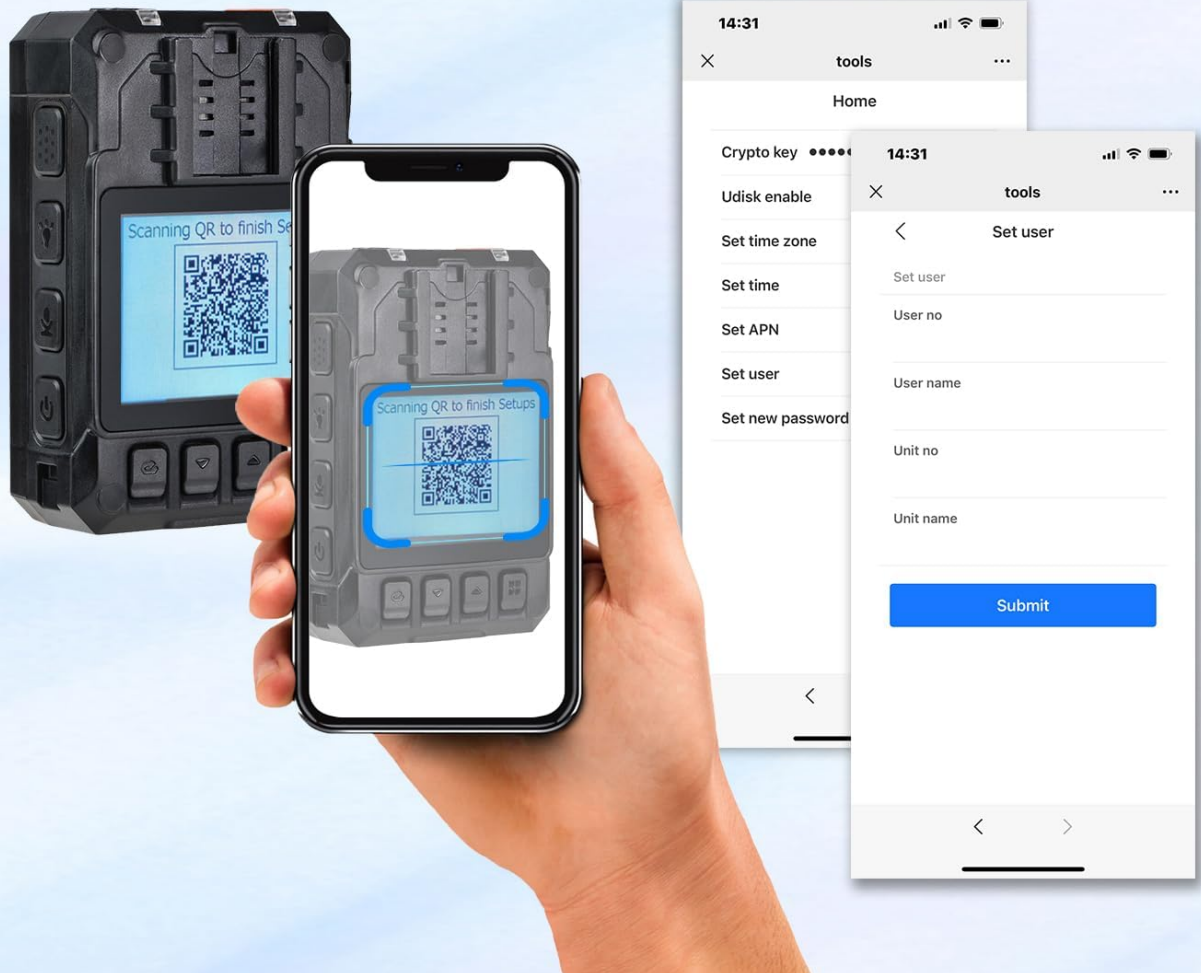


Image 6: Demonstrates the manual/auto night vision feature, showing clear footage with night vision on versus off in dark conditions.




Image 7: Visual representation of the camera's durability, highlighting its 2-meter drop resistance and IP67 waterproof rating.

## 6. MULTIPLE WEARING METHODS

The BC605 camera offers versatile wearing options to suit different needs:

- **Magnetic Mount:** For quick and secure attachment to magnetic surfaces or clothing.
- **Short Clip:** A 360° rotatable clip for attaching to pockets, belts, or other gear.

## Product Packaging Accessories



- Built in 64GB/128GB memory card, Recyclable recording
- Device recording for 1 hour, approximately 2GB



Image 8: Demonstrates the magnetic mount and the 360-degree rotatable short clip for flexible attachment options.

## 7. SPECIFICATIONS

Feature	Detail
Brand	ponycam
Model Number	BC605
Item Weight	14.9 ounces
Product Dimensions	3.3 x 2.2 x 1.2 inches
Batteries	1 Lithium Ion battery (included)
Video Capture Resolution	1440p (default 1080p)
Photo Sensor Technology	Other
Flash Memory Type	Micro SD (Built-in 128GB)
Video Capture Format	MP4
Supported Audio Format	MP3, AAC
Screen Size	2 Inches
Connectivity Technology	USB
Color	BLACK
Special Feature	Compact, Night Vision, Waterproof (IP67), Drop Resistant (2M)

## 8. CARE AND MAINTENANCE

---

- **Cleaning:** Use a soft, dry cloth to clean the camera body and lens. Avoid abrasive cleaners or solvents.
- **Storage:** Store the camera in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery:** For optimal battery life, charge the camera regularly and avoid fully discharging it for extended periods.
- **Data Management:** Regularly transfer important footage to a computer or external storage device and delete unnecessary files from the camera's memory to ensure sufficient recording space.

## 9. TROUBLESHOOTING

---

If you encounter issues with your Ponycam BC605, please refer to the following common solutions:

- **Camera not turning on:** Ensure the battery is charged. Connect the camera to the power adapter and try again.
- **Recording issues:** Check if the memory is full. If so, transfer files and delete them from the camera. Ensure the camera is not in a paused or standby mode.
- **Incorrect time/date:** Follow the "Initial Setup and Configuration" section to reset the time and time zone via QR code.
- **Unable to access files:** Ensure the USB data cable is securely connected to both the camera and your computer. Try a different USB port or cable.
- **Camera unresponsive:** Perform a soft reset by holding down the power button for an extended period (e.g., 10-15 seconds) until the device restarts.

## 10. WARRANTY AND SUPPORT

---

Ponycam offers the following support for your product:

- 30-day trial period (free return or exchange).
- Lifetime limited warranty for quality-related product issues after the return period.
- Lifetime technical support.

For any questions or support needs, please contact our support team:

**Email:** [amazon@szest.com](mailto:amazon@szest.com)

**Tel:** +86 755 26503848

