

Matven XX07-80-WL

Matven Linear Pendant Light Fixture User Manual

Model: XX07-80-WL

[Overview](#)

[Safety](#)

[Contents](#)

[Setup](#)

[Operation](#)

[Maintenance](#)

[Troubleshooting](#)

[Specifications](#)

[Warranty](#)

[& Support](#)

1. PRODUCT OVERVIEW

This manual provides instructions for the installation, operation, and maintenance of your Matven Linear Pendant Light Fixture, Model XX07-80-WL. This modern LED light fixture is designed for various indoor applications, offering adjustable brightness and color temperature to suit your preferences.



Image 1.1: The Matven Linear Pendant Light Fixture (Model XX07-80-WL) installed above a dining table, showcasing its sleek design and illumination.

2. IMPORTANT SAFETY INSTRUCTIONS

WARNING: Risk of Electric Shock. Disconnect power at the circuit breaker before installation or servicing.

- Read all instructions carefully before beginning installation.
- Ensure the electrical supply is turned off at the main circuit breaker or fuse box before wiring.
- All electrical connections must be in accordance with local codes, ordinances, or the National Electric Code (NEC). Consult a qualified electrician if you are unfamiliar with proper electrical wiring installations.
- Use only UL/ETL listed wire connectors.
- This fixture is intended for indoor use only. Do not expose to water or moisture.
- Do not attempt to modify the fixture. Any modifications may void the warranty and create a safety hazard.
- Keep packaging materials away from children.

3. PACKAGE CONTENTS

Carefully unpack your fixture and identify all parts. Ensure all components are present and undamaged before discarding packaging materials. If any parts are missing or damaged, contact customer support.

- Linear Pendant Light Fixture (1)
- Ceiling Canopy (1)
- Adjustable Hanging Wires (2)
- Remote Control (1)
- Mounting Hardware (screws, wire connectors, etc.)
- Instruction Manual (this document)

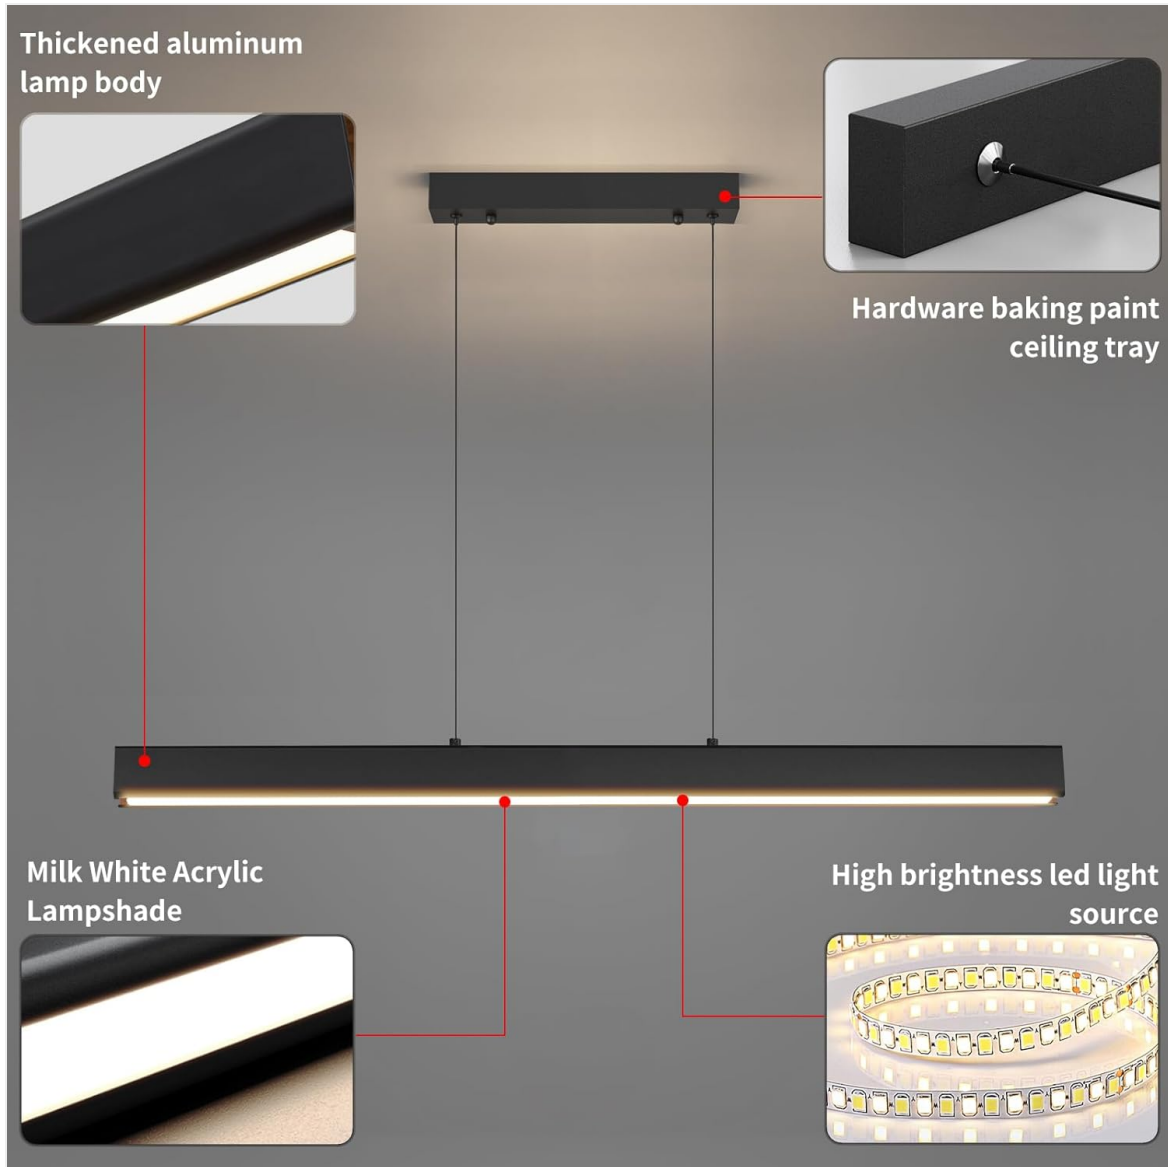


Image 3.1: Exploded view of the light fixture components, highlighting the aluminum body, acrylic lampshade, and ceiling tray.

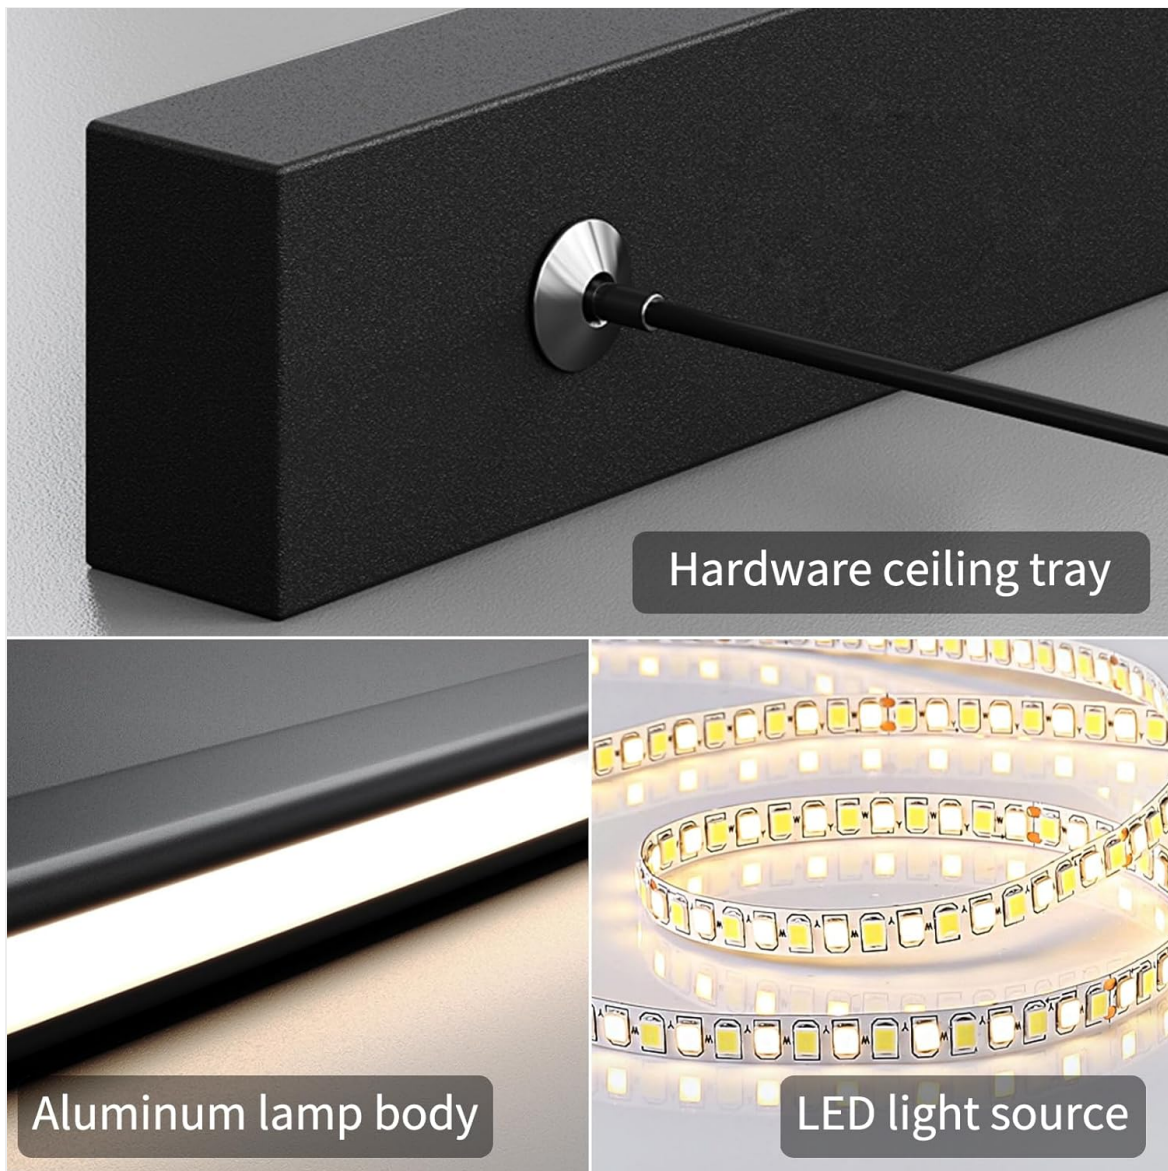


Image 3.2: Detailed view of the hardware ceiling tray, aluminum lamp body, and integrated LED light source.

4. INSTALLATION INSTRUCTIONS

4.1 Pre-Installation

1. Turn off power at the circuit breaker.
2. Ensure the mounting surface is structurally sound to support the fixture's weight.
3. Determine the desired hanging height for the fixture.


4.2 Mounting the Fixture

1. Attach the mounting bracket to the junction box in the ceiling using the provided screws.
2. Connect the fixture's ground wire to the supply ground wire using a wire connector.
3. Connect the fixture's live (black) wire to the supply live (black) wire.
4. Connect the fixture's neutral (white) wire to the supply neutral (white) wire.
5. Carefully tuck all wires into the junction box.
6. Secure the ceiling canopy to the mounting bracket with the provided screws.

4.3 Adjusting Hanging Height

The fixture features adjustable hanging wires, allowing you to customize the height up to 59 inches (150cm).

1. To adjust the height, gently press the black button located on the connection point where the wires enter the ceiling canopy.
2. While holding the button, slide the wire to the desired length.
3. Release the button to lock the wire in place. Ensure both wires are adjusted to the same length for a level fixture.

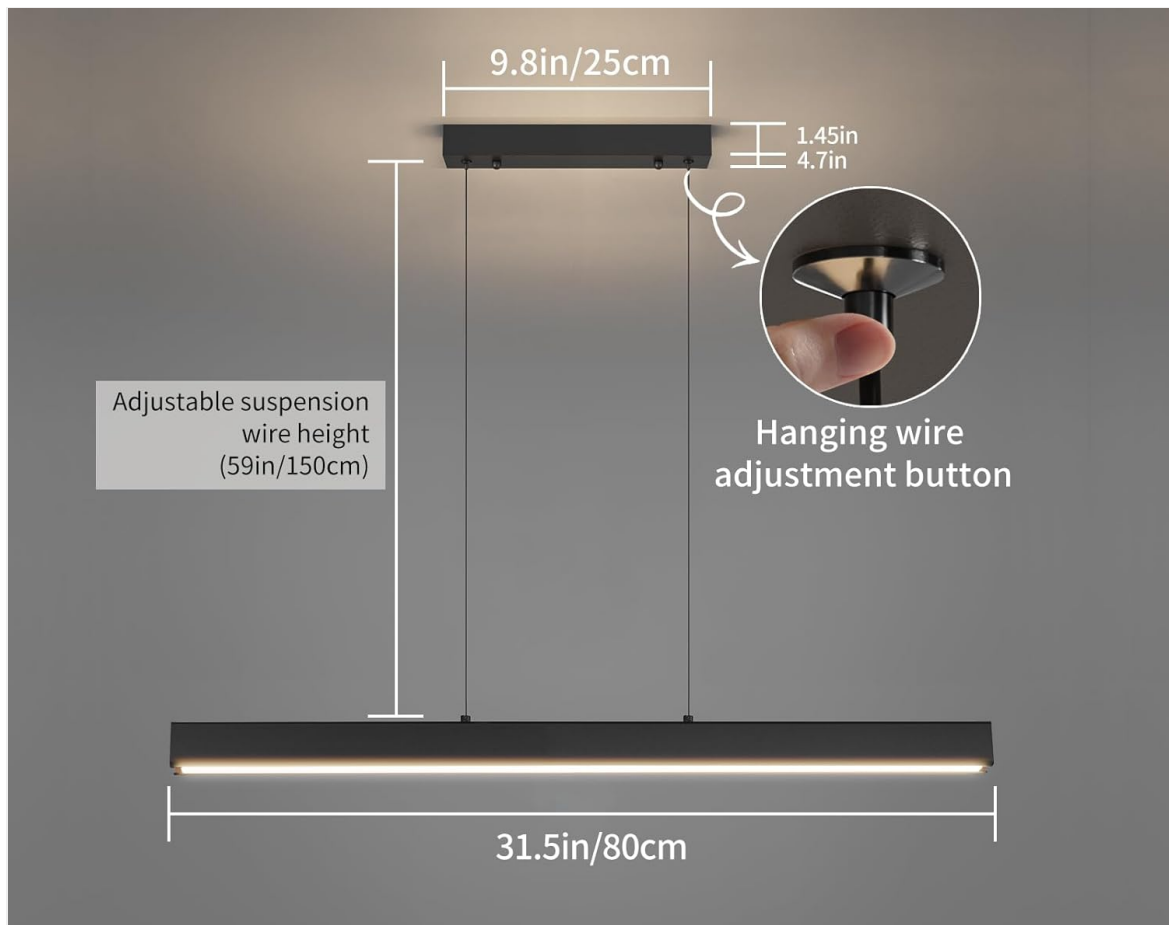

Parameter display

Material Science: Hardware lamp body	Light Source: Highlight LED light source
Wattage: 40W*2	Suitable Area: 10-20m ²

Image 4.1: Illustration of the adjustable hanging wire mechanism and maximum height.

After installation, restore power at the circuit breaker and test the light fixture.

5. OPERATING INSTRUCTIONS

Your Matven Linear Pendant Light Fixture is controlled by the included remote control, allowing for dimming and color temperature adjustments.

5.1 Remote Control Functions

- **Power On/Off:** Press the power button to turn the light on or off.
- **Brightness Adjustment:** Use the brightness up/down buttons to adjust the light intensity from 10% to 100%.
- **Color Temperature Change:** Cycle through warm white (3000K), natural white (4000K), and cool white (6000K) settings using the dedicated color temperature buttons or a single cycle button, depending on remote design.

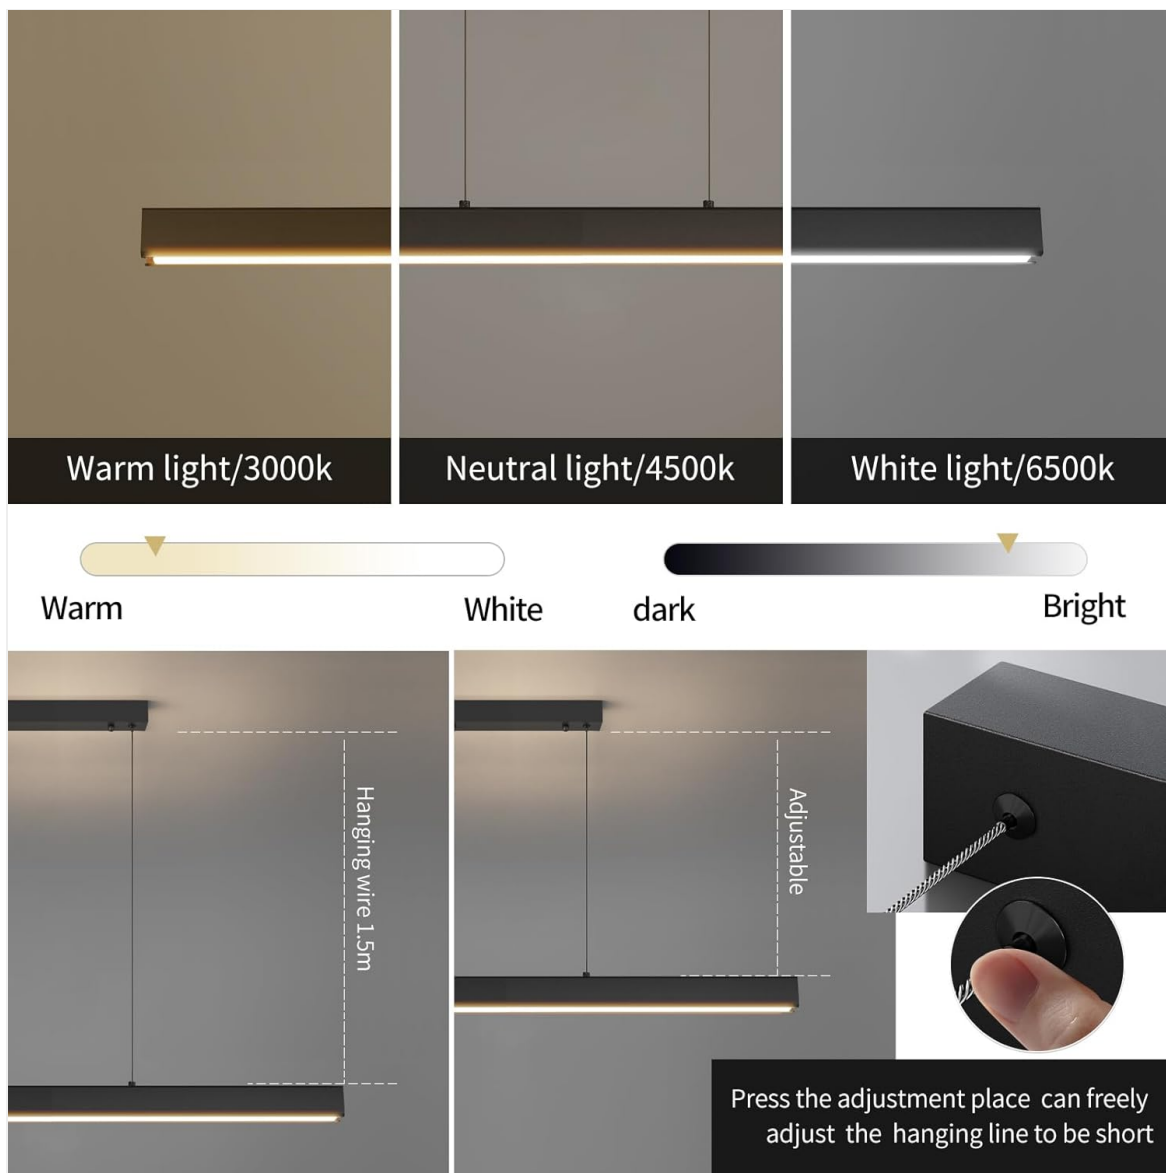


Image 5.1: Visual representation of the adjustable color temperatures (Warm, Neutral, White) and dimming capability.

6. CARE AND MAINTENANCE

To ensure the longevity and optimal performance of your light fixture, follow these maintenance guidelines:

- **Cleaning:** Always turn off the power before cleaning. Use a soft, dry, or slightly damp cloth to wipe the fixture. Avoid abrasive cleaners, solvents, or polishes as they may damage the finish or acrylic.
- **LED Lifespan:** The integrated LED chips have a long lifespan (approximately 50,000 hours) and are not user-replaceable. If the LEDs fail, contact customer support.
- **Inspection:** Periodically check the hanging wires and electrical connections for any signs of wear or damage.

7. TROUBLESHOOTING

If you encounter issues with your Matven Linear Pendant Light Fixture, refer to the following table for common problems and solutions:

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Light does not turn on.	No power supply. Loose wiring connection. Remote control battery depleted.	Check circuit breaker. Ensure all wires are securely connected (power off first). Replace remote control battery.
Light flickers or dims unexpectedly.	Unstable power supply. Loose wiring. Remote control interference.	Consult an electrician to check power supply. Check wiring connections (power off first). Ensure no obstructions between remote and fixture.
Remote control not working.	Battery depleted. Remote not paired (if applicable). Obstruction.	Replace battery. Refer to remote control instructions for pairing (if provided separately). Ensure clear line of sight to fixture.
Light color or brightness cannot be adjusted.	Remote control issue. Fixture malfunction.	Check remote battery and functionality. If problem persists, contact customer support.

If the problem persists after attempting these solutions, please contact Matven customer support for assistance.

8. PRODUCT SPECIFICATIONS

Brand: Matven

Model: XX07-80-WL

Material: Aluminum, Acrylic

Color: Black (Fixture body)

Style: Modern

Light Fixture Form: Island

Product Dimensions: 31"L x 2.1"W x 2.1"H

Item Weight: 3.49 pounds

Indoor/Outdoor Usage: Indoor

Power Source: Corded Electric

Installation Type: Semi Flush Mount (Hanging)

Special Feature: Dimmable (10%-100%)

Control Method: Remote

Light Source Type: Integrated LED

Wattage: 40 watts

Voltage: 100-240V

Light Color: Warm White (3000K), Natural White (4000K), Cool White (6000K)

CRI: 85+

Lifespan: 50,000 hours

Shade Material: Acrylic

Included Components: Remote Control

Assembly Required: No

9. WARRANTY AND CUSTOMER SUPPORT

Matven is committed to providing high-quality products and customer satisfaction.

- **Warranty:** This product comes with a 2-year limited manufacturer warranty.
- **Returns/Exchanges:** We offer 30 days free exchange from the date of purchase.
- **Customer Support:** If you have any questions, concerns, or require assistance with your Matven Linear Pendant Light Fixture, please contact our customer support team. We aim to respond within 24 hours and resolve any issues.

Please retain your proof of purchase for warranty claims.