

GeyouLux SZ-8084-4WH-S-XC

GeyouLux GU10 Surface Mounted Spotlight Instruction Manual

Model: SZ-8084-4WH-S-XC

INTRODUCTION

Thank you for choosing the GeyouLux GU10 Surface Mounted Spotlight. This manual provides essential information for the safe and correct installation, operation, and maintenance of your new lighting fixture. Please read these instructions carefully before installation and retain them for future reference.

IMPORTANT SAFETY INFORMATION

- Always disconnect power before installation, maintenance, or bulb replacement.
- Installation should be performed by a qualified electrician or competent person.
- Ensure the supply voltage matches the fixture's requirements (230V).
- Do not exceed the maximum wattage of 35W for GU10 bulbs.
- This product is designed for indoor use only (IP20 rating). Do not expose to moisture or water.
- Keep away from flammable materials.
- Do not touch the bulb immediately after use as it may be hot.

PACKAGE CONTENTS

Depending on the variant purchased (1x, 2x, 4x, or 6x), your package will include:

- GeyouLux GU10 Surface Mounted Spotlight(s)
- GU10 Lamp Holder(s)
- Terminal Block(s)
- Screws and Wall Plugs for mounting
- Installation Manual (this document)

Note: GU10 bulbs are NOT included and must be purchased separately.

PRODUCT SPECIFICATIONS

PRODUCT INFORMATION



Voltage: AC 220-240V



Base: GU10



Material: Aluminium




Warranty: 3 Years



Rotation angle: 30°



Service Life 30000H

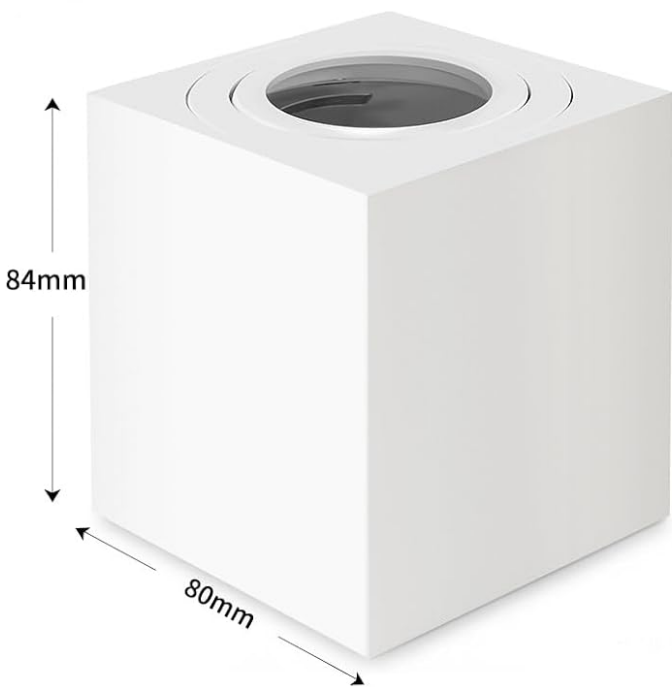

DIMENSIONS

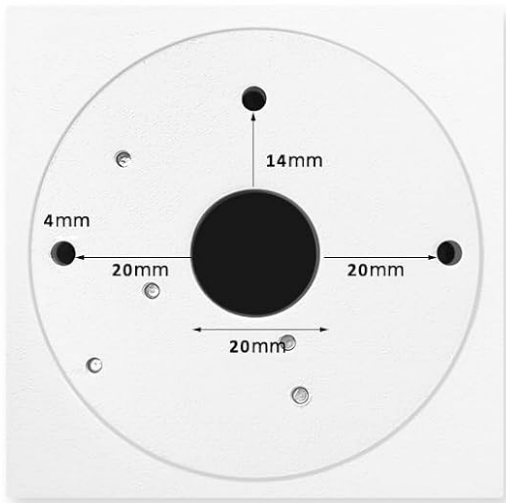



Image: Technical specifications and dimensions of the GeyouLux GU10 Surface Mounted Spotlight.

Feature	Detail
Product Type	GU10 Surface Mounted Spotlight
Model Number	SZ-8084-4WH-S-XC
Dimensions (L x W x H)	80mm x 80mm x 84mm
Material	Solid Aluminum + Flame-retardant PBT
Color	White (Matte Finish)
Voltage	230V AC


Lamp Base	GU10
Max Wattage	35W
Compatible Bulbs	GU10 LED or Halogen bulbs (Ø50mm)
Rotation Angle	30° (inner ring)
Protection Rating	IP20 (Indoor use only)
Mounting Type	Surface Mount
Certifications	CE, RoHS, UKCA

SETUP AND INSTALLATION


Please ensure power is disconnected at the main circuit breaker before beginning installation.




Rotate counterclockwise to detach the ceiling base from the light body



Secure the base using the provided ribbed anchors and screws

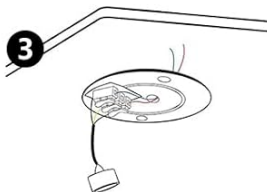

Connect the base terminals, to the reserved wires

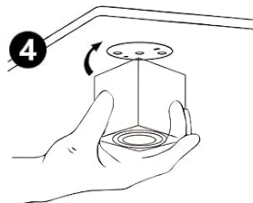

Rotate counterclockwise upwardly to tighten fixture and base together

Image: Visual guide for the installation process of the spotlight.

1. **Prepare the Fixture:** Rotate the main body of the spotlight counter-clockwise to detach it from the ceiling base.
2. **Mount the Base:** Secure the ceiling base to the desired mounting surface using the provided screws and wall plugs. Ensure it is firmly attached.
3. **Wire Connection:** Connect the electrical wires from your ceiling to the terminal block on the spotlight's base. Ensure correct polarity (Live, Neutral, Earth if applicable) and secure connections.
4. **Install Bulb (Not Included):** Insert a compatible GU10 bulb (max 35W, Ø50mm) into the GU10 lamp holder.
5. **Attach Spotlight Body:** Align the spotlight body with the mounted ceiling base and rotate clockwise until it is securely fastened.
6. **Restore Power:** Once installation is complete and all connections are secure, restore power at the main circuit breaker.

OPERATING INSTRUCTIONS

The GeyouLux GU10 Surface Mounted Spotlight is designed for straightforward operation.

- **Power On/Off:** Control the light using your standard wall switch.
- **Adjusting Light Direction:** The inner ring of the spotlight can be swiveled up to 30 degrees, allowing you to direct the light beam as needed. Gently adjust the inner ring to achieve your desired lighting angle.



LET THE LIGHT EFFECT ACHIEVE THE IDEAL STATE

Swivelling up to 30°

Image: Illustration of the spotlight's 30-degree adjustable swivel feature.

The light color, brightness, and dimming function depend entirely on the GU10 bulb you choose to install. This fixture is compatible with various GU10 bulb types, including LED, halogen, dimmable, and smart bulbs, provided they are Ø50mm and do not exceed 35W.

ALL GU10 BULBS CAN BE INSTALLED



Note: Bulbs are not included in our products!

Image: Examples of compatible GU10 bulb types (LED, Halogen, Dimmable, Smart) with a maximum wattage of 35W.

MAINTENANCE

- **Cleaning:** Ensure the power is off and the fixture is cool before cleaning. Wipe the surface with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- **Bulb Replacement:** Disconnect power before replacing the bulb. Allow the old bulb to cool completely. Rotate the spotlight body counter-clockwise to detach it, then carefully remove and replace the GU10 bulb. Reattach the spotlight body by rotating clockwise.
- **Inspection:** Periodically check for any signs of damage to the wiring or fixture. If damage is found, discontinue use and consult a qualified electrician.

TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Light does not turn on.	No power supply; faulty bulb; loose wiring connection.	Check circuit breaker. Replace bulb. Verify wiring connections (ensure power is off).
Light flickers.	Loose bulb; incompatible dimmer switch (if applicable); faulty bulb.	Ensure bulb is securely seated. Use a compatible dimmer. Replace bulb.
Fixture is hot to touch.	Bulb wattage too high.	Ensure bulb wattage does not exceed 35W. Allow fixture to cool before touching.

If you experience issues not listed here or if the problem persists after attempting the solutions, please contact GeyouLux customer support.

WARRANTY AND CUSTOMER SUPPORT

This GeyouLux product comes with a **2-year manufacturer's warranty** from the date of purchase, covering defects in materials and workmanship.

For any questions, concerns, or technical assistance regarding your GeyouLux GU10 Surface Mounted Spotlight, please contact our customer support. We are committed to providing a solution within 12 hours to ensure your satisfaction. You can visit the official GeyouLux store on Amazon for more information and support: [GeyouLux Amazon Store](#)

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question