**Saved from manuals.plus.**
**Open the live page for links to other documents and user manuals.**



**MangoKit MD2**

# MangoKit MD2 Portable DAB Radio User Manual

Model: **MD2** | Brand: **MangoKit**

## 1. Introduction

The MangoKit MD2 is a versatile portable digital radio offering DAB, DAB+, FM, and Bluetooth connectivity. Designed for ease of use and clear sound, it is suitable for various environments, including kitchens, bedrooms, and outdoor settings. This manual provides detailed instructions for setting up, operating, and maintaining your MD2 radio.

## 2. Setup

### 2.1 Powering On

The MangoKit MD2 can be powered via AC adapter or batteries for portability.

- **AC Power:** Connect the provided power adapter to the DC IN port on the radio and plug it into a wall outlet.
- **Battery Power:** For portable use, insert 4xAA batteries (not included) into the battery compartment on the back of the unit. Ensure correct polarity.




Image: The MangoKit MD2 Portable DAB Radio, showcasing its compact design and controls.

### 2.2 Initial Setup and Auto-Scan

Upon first power-on, the radio will automatically perform a full scan for available DAB/DAB+ stations. This process may take a few minutes. Once complete, the radio will display the first available station.

- Ensure the telescopic antenna is fully extended for optimal reception.
- During the scan, the display will show the scanning progress and the number of stations found.

## 3. Operating Instructions

### 3.1 DAB/DAB+ Radio Mode

To select DAB/DAB+ mode, press the **SOURCE** button until 'DAB' is displayed. You can then navigate through available stations using the navigation buttons or the rotary dial.




Image: The MangoKit MD2 radio with its display showing DAB+ mode, indicating crystal-clear digital audio.

## 3.2 FM Radio Mode

To switch to FM radio, press the**SOURCE** button until 'FM' is displayed. You can manually tune or perform an auto-scan for FM stations.




Image: The MangoKit MD2 radio positioned on a kitchen counter, demonstrating its suitability for various home environments.

## 3.3 Bluetooth Connectivity

The MD2 features strong Bluetooth 5.3 connectivity, allowing you to stream audio from your smartphone or other Bluetooth-enabled devices.

1. Press the **SOURCE** button until 'Bluetooth' is displayed. The radio will enter pairing mode.
2. On your smartphone, enable Bluetooth and search for 'MangoKit MD2'.
3. Select 'MangoKit MD2' to pair. Once connected, you can play music or podcasts through the radio.

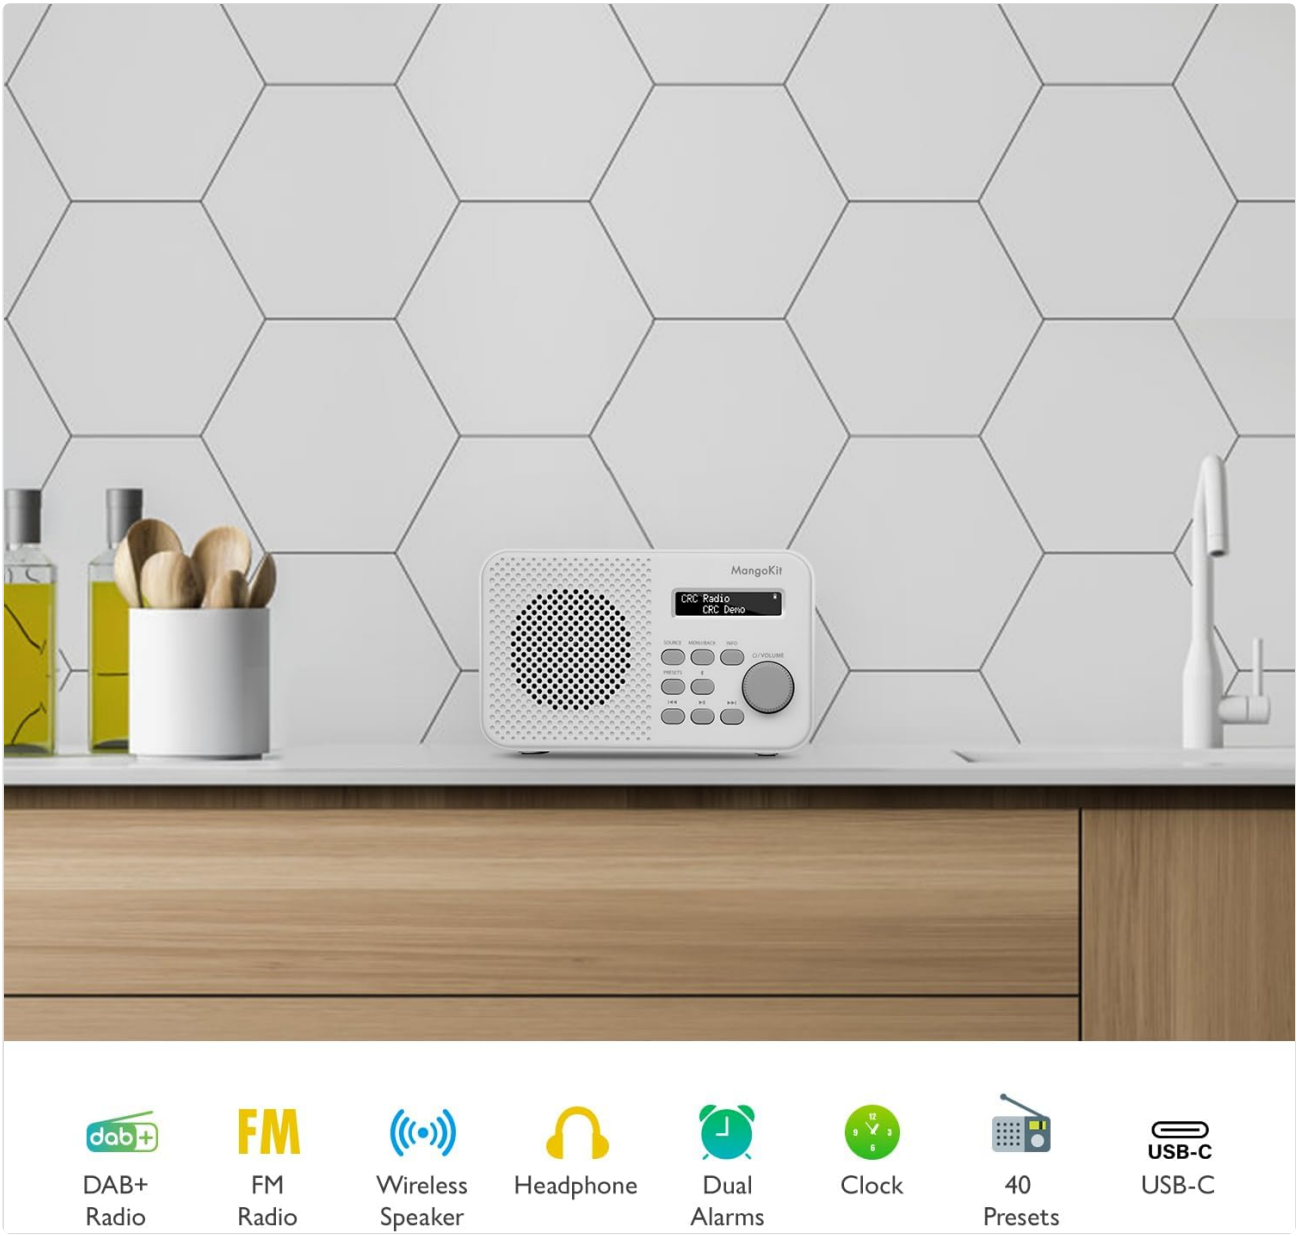



Image: The MangoKit MD2 radio next to a smartphone, illustrating its seamless Bluetooth connection for streaming audio.

## 3.4 Alarms and Sleep Timer

The MD2 supports dual alarms and a sleep timer function.

- **Setting Alarms:** Navigate to the 'Alarm' settings in the menu. You can set two independent alarms, choosing your preferred DAB or FM station as the alarm sound.
- **Sleep Timer:** Access the 'Sleep' option in the system settings to set a timer for the radio to automatically turn off after a specified duration.

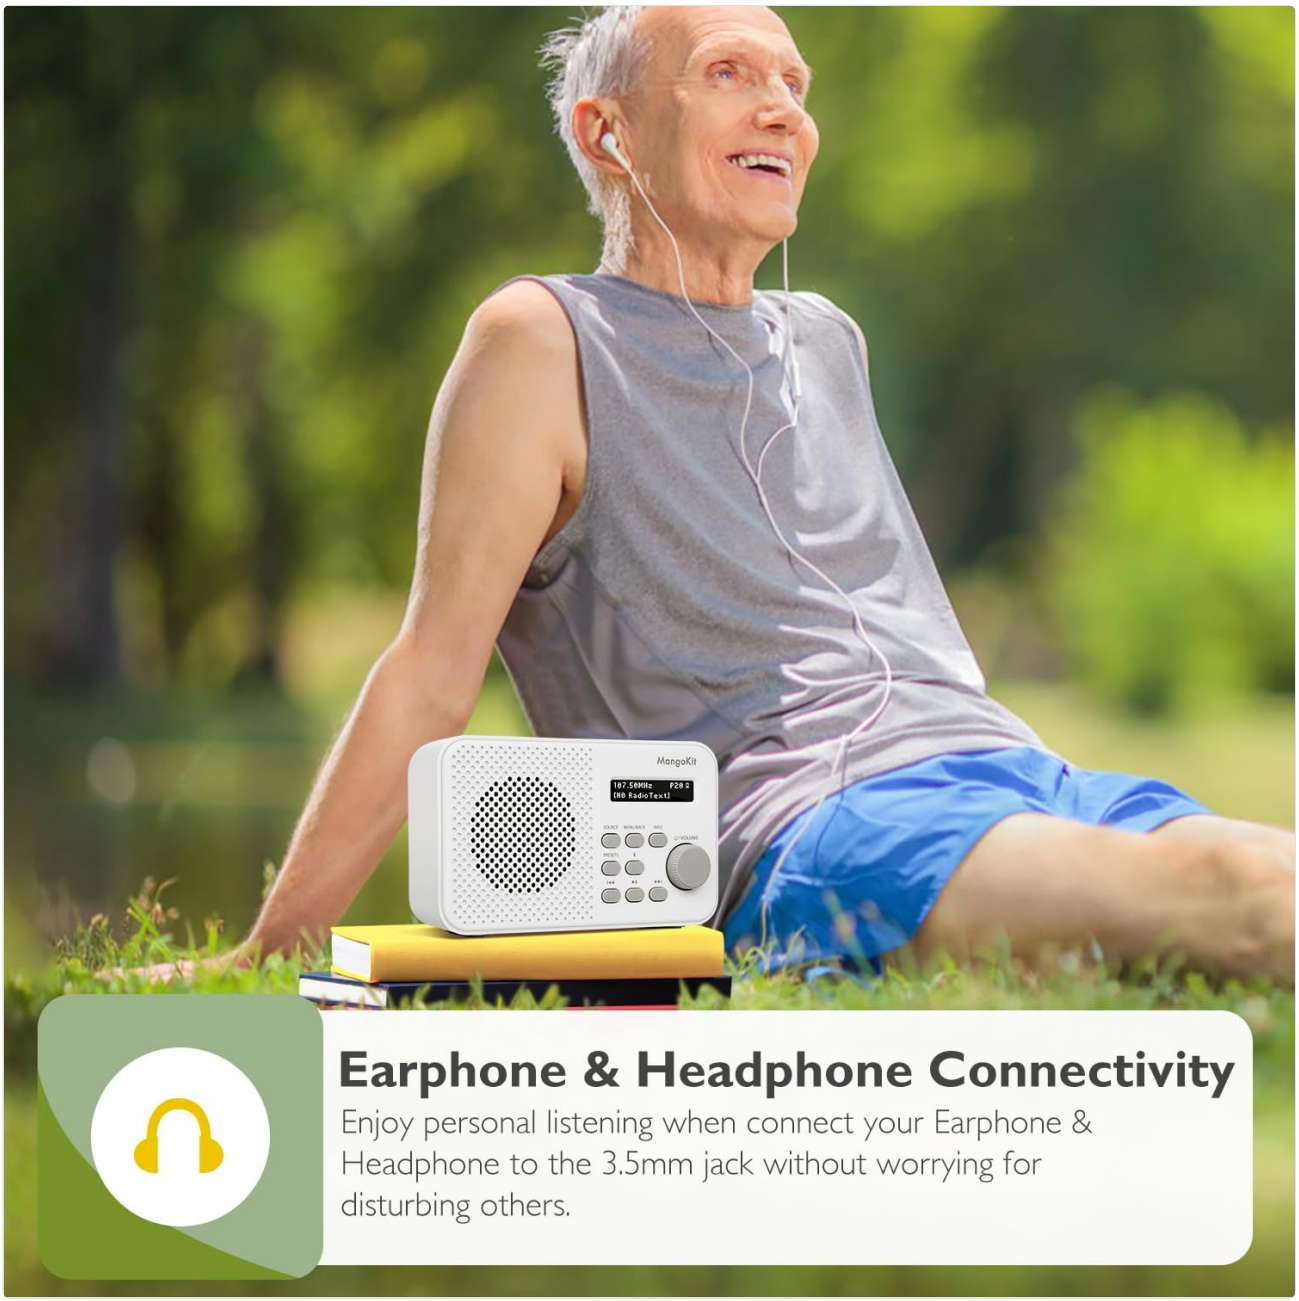



Image: The MangoKit MD2 radio on a bedside table, highlighting its dual alarm and sleep timer features for convenient use.

## 3.5 Presets

Store up to 40 of your favorite radio stations (20 DAB/DAB+ and 20 FM) for quick access.

- **Storing a Preset:** Tune to the desired station, then press and hold the **PRESETS** button. Use the rotary dial to select a preset number (1-40) and press the dial to confirm.
- **Recalling a Preset:** Briefly press the **PRESETS** button, then use the navigation buttons or rotary dial to select the desired preset number.




Image: The MangoKit MD2 radio displaying its preset functionality, allowing users to easily store and access their favorite stations.

## 3.6 Headphone Connectivity

For private listening, connect headphones to the 3.5mm headphone jack located on the side of the radio.




Image: A person enjoying personal listening with the MangoKit MD2 radio connected to headphones via its 3.5mm jack.

### 3.7 Equalizer Settings

The MD2 includes an equalizer function to adjust the audio output to your preference. Navigate to the 'Equaliser' setting in the system menu to choose from various preset EQ modes (e.g., Normal, Classic, Jazz, Rock, Speech) or a custom setting.

### 3.8 Official Product Videos

For visual guidance on setup and operation, please refer to the official product videos below:

Your browser does not support the video tag.

Video: An overview of the MangoKit MD2 DAB/DAB+FM Radio with Bluetooth, demonstrating its features and ease of use.

Your browser does not support the video tag.

Video: A detailed demonstration of the MangoKit MD2 DAB/DAB+FM Radio with Bluetooth, covering various functionalities.

## 4. Maintenance

To ensure the longevity and optimal performance of your MangoKit MD2 radio, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to clean the exterior of the radio. Do not use abrasive cleaners or solvents.
- **Antenna Care:** Handle the telescopic antenna gently to prevent bending or breaking.
- **Battery Replacement:** If using batteries, replace them when the low battery indicator appears on the display. Always replace all batteries at the same time with new ones of the same type.
- **Storage:** If storing the radio for an extended period, remove the batteries to prevent leakage.

## 5. Troubleshooting

If you encounter issues with your MangoKit MD2, please refer to the following common problems and solutions:

| Problem | Possible Cause | Solution |
|---|---|---|
| No power | Power adapter not connected, batteries depleted or incorrectly inserted. | Check power adapter connection. Replace batteries or ensure correct polarity. |
| Poor radio reception (DAB/FM) | Antenna not extended, weak signal area, interference. | Fully extend the telescopic antenna. Try repositioning the radio. Avoid placing near other electronic devices. |
| Bluetooth not connecting | Radio not in pairing mode, device not discoverable, previously paired device connected. | Ensure radio is in Bluetooth mode. Make sure your device's Bluetooth is on and discoverable. Disconnect from other Bluetooth devices. |
| Alarm not working / Time lost | Radio loses time when powered off, especially in battery mode. | Ensure the radio remains connected to AC power if using alarm functions regularly, as it may lose time when completely powered off on battery. |
| Volume changes unexpectedly | Potential software or hardware issue. | Try a factory reset (refer to menu settings). If the issue persists, contact customer support. |

## 6. Specifications

| Feature | Detail |
|---|---|
| Product Dimensions | 16 x 5.4 x 9.5 cm (L x W x H) |
| Weight | 490 Grams |
| Model Number | MD2 |
| Brand | MangoKit |
| Color | Mono Stone Grey |
| Special Feature | Portable DAB, DAB+, FM and Bluetooth with clean sound quality |
| Connectivity Technology | Bluetooth, Auxiliary |
| Tuner Technology | DAB/FM |

| Feature | Detail |
|---|---|
| Supported Radio Bands | DAB/DAB+/FM |
| Water Resistance Level | Not water resistant |
| Hardware Interface | Radio Frequency |
| Country of Origin | China |

## 7. Warranty and Support

For warranty information and customer support, please refer to the documentation included with your product or visit the official MangoKit website. You may also contact the seller directly through the platform where you purchased the product.

© 2024 MangoKit. All rights reserved.


### Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

**Name**

Anonymous

**Email**

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

**Question**

Example: How do I reset this device or fix this error?

**Details**

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question



**Open the live page**

**https://manuals.plus/asin/B0D7RWLYDM**

More documents and user manuals: **https://manuals.plus/**