

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [AULA](#) /
- › [AULA F75 Pro Wireless Mechanical Keyboard User Manual](#)

## AULA F75 Pro

# AULA F75 Pro Wireless Mechanical Keyboard User Manual

Model: F75 Pro | Brand: AULA

### INTRODUCTION

The AULA F75 Pro is a versatile 75% layout mechanical keyboard designed for a wide range of users, from gamers to professionals. It offers tri-mode connectivity, allowing seamless switching between Bluetooth 5.0, 2.4GHz wireless, and USB wired connections. Featuring hot-swappable switches, advanced sound-dampening structure, vibrant RGB backlighting, and durable PBT keycaps, the F75 Pro provides a customizable and comfortable typing experience.



Image: AULA F75 Pro Mechanical Keyboard in Gradient Purple, showcasing its compact 75% layout and RGB backlighting.

### PACKAGE CONTENTS

Please ensure all items are present in your package:

- AULA F75 Pro Wireless Mechanical Keyboard
- Keycap/Switches Puller x1
- USB-C Cable x1
- Extra LEOBOG Star Vector Switches x2
- Dust Cover x1
- English Manual x1 (this document)

## SETUP

### Charging the Keyboard

The keyboard is equipped with a 4000mAh rechargeable battery. Connect the included USB-C cable to the keyboard's Type-C port and the other end to a USB power source (e.g., computer USB port, wall adapter). The keyboard's indicator light will show charging status.

### Connection Modes

The AULA F75 Pro supports three connection modes: Bluetooth 5.0, 2.4GHz Wireless, and USB Wired. A switch on the side of the keyboard allows you to select the desired mode.

# THREE CONNECTION MODES

BT5.0/2.4Ghz/USB-C Wired

Support multiple devices and system



Image: Diagram illustrating the three connection modes: Bluetooth 5.0, 2.4GHz Wireless, and USB-C Wired, compatible with various devices.

- 1. USB Wired Mode:** Connect the USB-C cable directly from the keyboard to your computer. The keyboard will automatically switch to wired mode.
- 2. 2.4GHz Wireless Mode:**
  - a. Locate the 2.4G USB dongle stored in the keyboard's side slot.
  - b. Plug the dongle into an available USB port on your device.
  - c. Switch the keyboard's mode selector to "2.4G". The keyboard should connect automatically.
- 3. Bluetooth 5.0 Mode:**
  - a. Switch the keyboard's mode selector to "BT".
  - b. On your device (PC, laptop, tablet, smartphone), enable Bluetooth and search for new devices.
  - c. Select "AULA F75 Pro" from the list of available devices to pair. The keyboard can connect to up to three Bluetooth devices (BT1, BT2, BT3) and switch between them using specific key combinations (refer to the quick start guide for exact key combinations).

## OPERATING INSTRUCTIONS

### Multi-function Control Knob

The F75 Pro features a multi-function knob for quick adjustments:

- **Switching Modes:** Long press the knob for approximately 5 seconds to switch between Gaming Mode and Office Mode.
- **Gaming Mode:**
  - Rotate the knob to adjust RGB lighting brightness.
  - Click the knob to switch between different lighting effects.
- **Office Mode:**
  - Rotate the knob to adjust system volume.
  - Click the knob to play or pause media.

### RGB Backlighting Control

The keyboard offers 16.8 million RGB lighting colors and various effects. In addition to the knob, you can control lighting via FN key combinations:

- **FN + ↑:** Increase lighting brightness
- **FN + ↓:** Decrease lighting brightness
- **FN + ←:** Decrease lighting speed
- **FN + →:** Increase lighting speed
- **FN + \|:** Switch between 16 pre-set lighting effects or turn off the backlight.

For advanced customization, including 10 music rhythm lighting effects and macro programming, download the official AULA F75 driver software. The driver only supports Windows systems under wired mode.

# 16.8 Million RGB Backlit

Support 10 music rhythm lighting effects via software

FN+I: switch 16 lighting effects or turn off the backlit

FN+↑: lighting brightness+

FN+↓: lighting brightness-

FN+→: lighting speed+

FN+←: lighting speed-

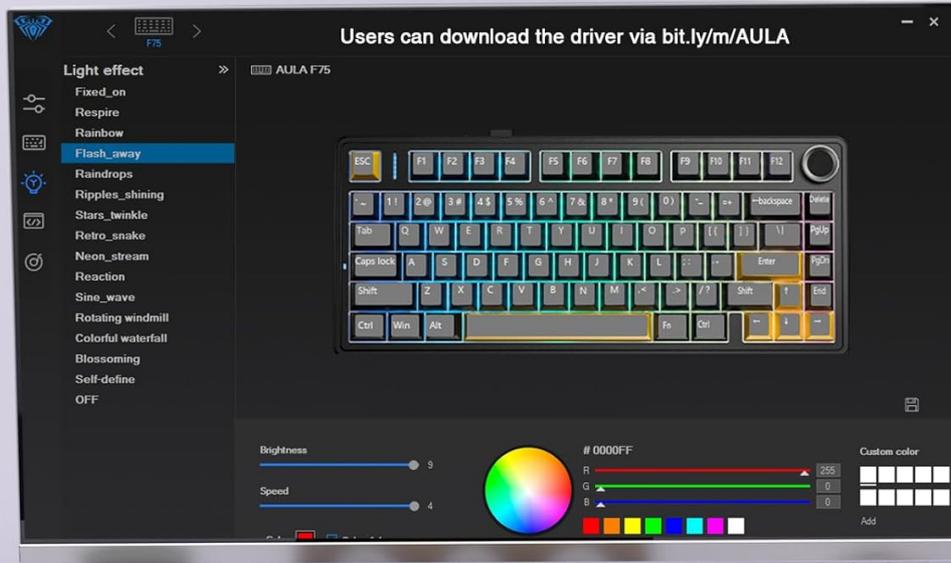


Image: Visual representation of the 16.8 Million RGB Backlit features, showing various lighting effects and control options.

# Driver Macro Customization

💡 16.8 Million RGB backlit  
⚙️ Macro recording & editing

🎵 Musical rhythm lighting effect  
🗄️ Custom shortcut keys



Driver only support Windows system under wired mode

Image: Screenshot of the AULA F75 driver software interface, demonstrating options for macro recording, editing, and custom shortcut keys.

## Macro Programming and WIN Key Lock

Utilize the F75 driver software to customize single keys or key combinations for enhanced gaming and work efficiency. The keyboard also supports N-key rollover and a WIN key lock function to prevent accidental presses during intense gaming sessions.

## KEY FEATURES OVERVIEW

### Hot-Swappable Design

The F75 Pro features a hot-swappable base, supporting both 3-pin and 5-pin switches. This allows users to easily replace switches without soldering, enabling customization of typing feel and sound.

### Advanced Structure and Sound Dampening

This keyboard incorporates an advanced internal structure with an extended integrated silicone pad and PCB single key slotting. Five layers of filling silencer material are used to fill gaps between the PCB, positioning plate, and shaft, effectively reducing cavity noise and providing a solid, creamy typing feel.

# Advanced Structure

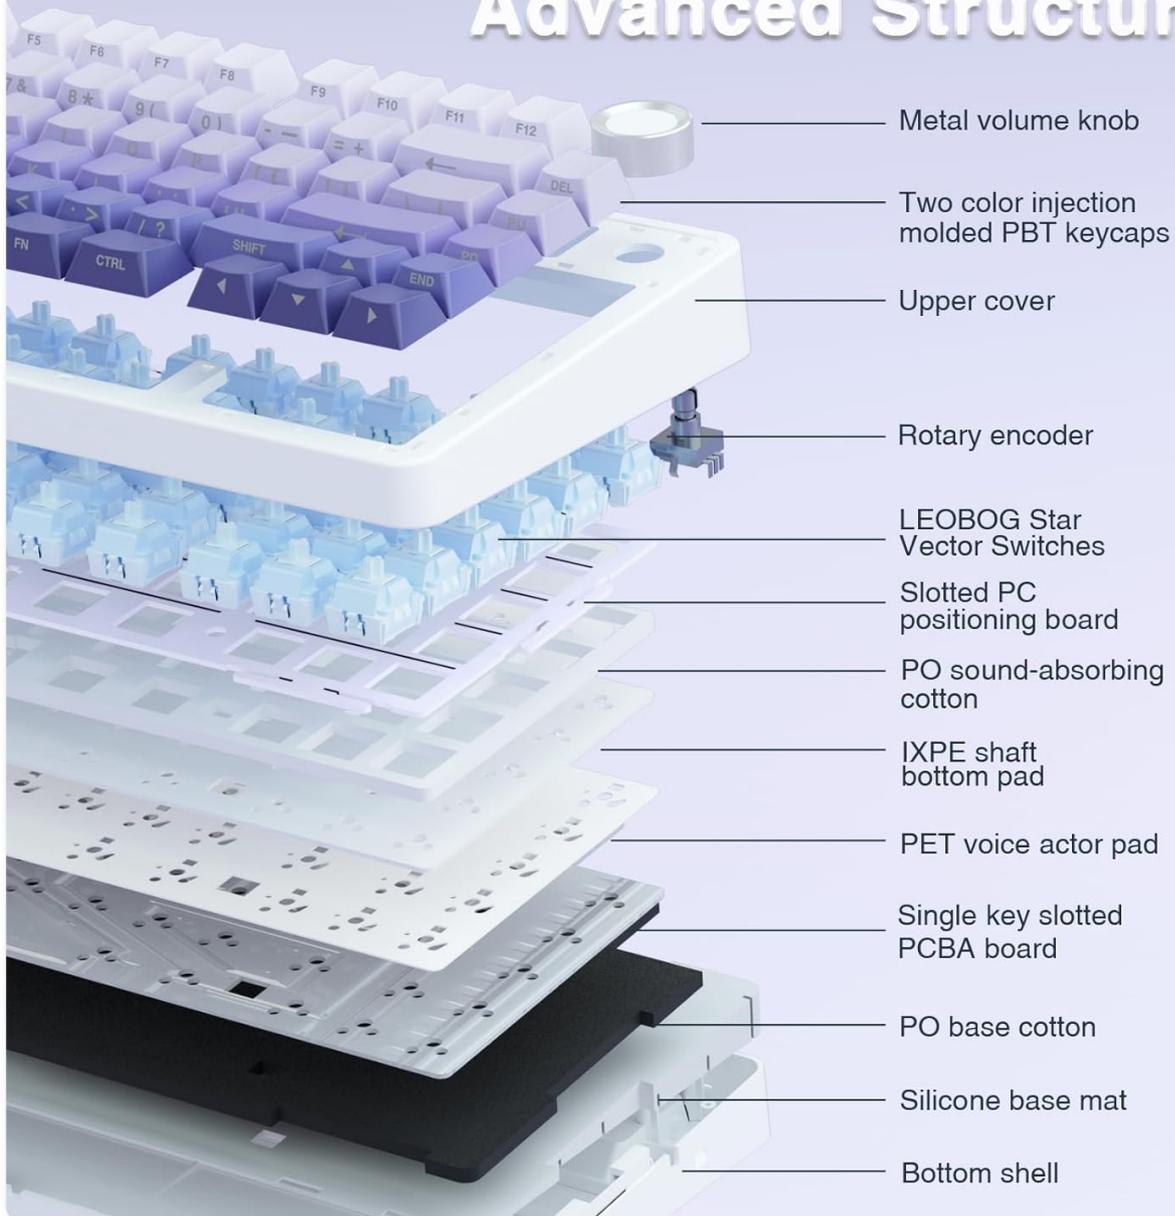


Image: Exploded view diagram of the AULA F75 Pro's advanced internal structure, highlighting layers of sound-absorbing materials and components like the metal volume knob, PBT keycaps, LEOBOG switches, and silicone base mat.

## LEOBOG Star Vector Switches

The keyboard comes equipped with pre-lubricated LEOBOG Star Vector switches, known for their smooth, quiet, and quick response. These switches offer a pleasant mechanical sound and are ideal for both typing and gaming.

# 1.PCB Hot Swappable Socket

Support 3-pin/5-pin Switches



# 2.LEOBOG Star Vector Switches

Smooth, quiet, quick response



Initial pressure: 32gf Min  
On pressure:  $40 \pm 3$ gf  
Bottoming pressure:  $55 \pm 3$ gf  
Conduction stroke:  $1.8 \pm 0.3$ mm  
Total stroke:  $3.5 \pm 0.3$ mm  
Mechanical life: about 60 million times

# 3.Side-Printed PBT Keycaps

The new trend of keyboard  
Shine through fonts, PBT anti-sweat, never fade

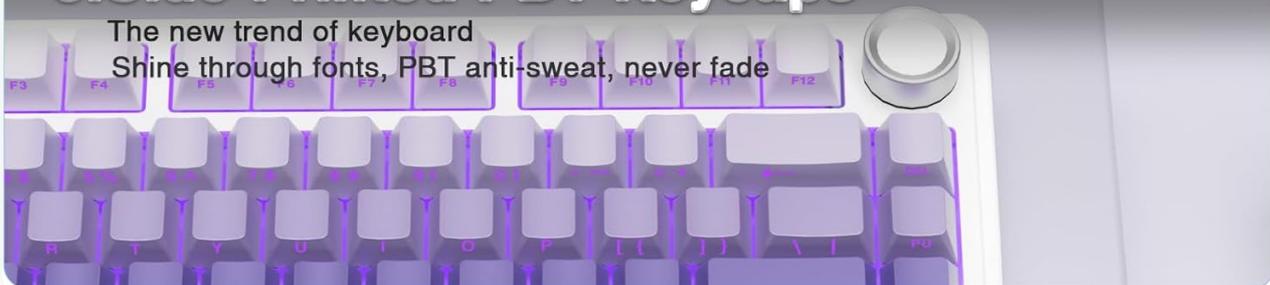


Image: Detailed view of the PCB hot-swappable socket and LEOBOG Star Vector switches, illustrating their smooth, quiet, and quick response characteristics.

## Side-Printed PBT Keycaps

The F75 Pro features side-printed PBT keycaps, manufactured using double injection molding and heat sublimation processes. This ensures durability, resistance to fading and sweat, and a soft touch. The side-printed legends allow the keyboard's backlight to shine through, offering a unique visual experience.

# AULA F75 Pro CUSTOM MECHANICAL KEYBOARD



BT5.0/2.4G/Wired



Advanced Structure



Pre-lubed Linear Switches



RGB Backlit



4000mAh Battery



Side-engraved PBT Keycaps



Hot Swappable



75% Layout with Knob



Image: Overview of key features including BT5.0/2.4G/Wired connectivity, Advanced Structure, Pre-lubed Linear Switches, RGB Backlit, 4000mAh Battery, Side-engraved PBT Keycaps, Hot Swappable, and 75% Layout with Knob.

## Official Product Video

Your browser does not support the video tag.

Video: An official product video from AULA MALL showcasing the AULA F75 Pro Side Engraved Tri-mode Mechanical Keyboard, highlighting its design and features.

## MAINTENANCE

### Cleaning

To maintain your keyboard's performance and appearance:

- Use the included dust cover when the keyboard is not in use.
- Gently wipe the keycaps and chassis with a soft, lint-free cloth.
- For deeper cleaning, use compressed air to remove dust and debris from between the keycaps.
- If necessary, carefully remove keycaps using the provided puller and clean the switch area.

## Keycap and Switch Replacement

The hot-swappable design allows for easy replacement of keycaps and switches:

- **Keycaps:** Use the keycap puller to gently lift keycaps straight up. Align new keycaps and press down firmly until they click into place.
- **Switches:** Use the switch puller to carefully grip the switch from its top and bottom clips, then pull straight up. Insert new switches by aligning the pins with the PCB sockets and pressing down until they are fully seated. Ensure pins are not bent.

## TROUBLESHOOTING

- **Keyboard not connecting wirelessly:**
  - Ensure the mode switch is set correctly (2.4G or BT).
  - For 2.4G, verify the dongle is securely plugged into a USB port.
  - For Bluetooth, ensure Bluetooth is enabled on your device and the keyboard is paired. Try re-pairing if necessary.
  - Check keyboard battery level.
- **RGB lighting not working or dim:**
  - Adjust brightness using the multi-function knob or FN + ↑.
  - Ensure the backlight is not turned off (FN + \|).
  - If using the driver, ensure it's running and settings are applied.
- **Keys not responding:**
  - Ensure the keyboard is properly connected (wired or wireless).
  - If a specific key is not responding, try hot-swapping the switch with one of the spare switches to check if the switch is faulty.
- **Unexpected behavior:**
  - Try restarting the keyboard by turning it off and on.
  - Ensure the keyboard firmware is up to date (check AULA's official website for updates).

## SPECIFICATIONS

Feature	Detail
Model	F75 Pro
Brand	AULA
Connectivity Technology	2.4GHz Wireless, Bluetooth 5.0, USB-C Wired
Keyboard Description	Mechanical
Number of Keys	81
Keycap Type	Side-Printed PBT (Double Injection Molding, Heat Sublimation)

Switches	LEOBOG Star Vector (Pre-lubed, Hot-swappable 3-pin/5-pin)
Backlighting	16.8 Million RGB Colors, Multiple Effects
Battery Capacity	4000mAh Lithium Ion (included)
Product Dimensions	12.7 x 5.64 x 1.7 inches
Item Weight	2.24 pounds
Special Features	Volume Roller, Backlit, Programmable Keys, Rechargeable, Hot-Swappable, N-Key Rollover, WIN Key Lock
Country of Origin	China

# 4000mAh High-capacity Battery

Battery Life: About 17.5 hours (Backlit ON)  
About 266.5 hours (Backlit OFF)



Image: Visual representation highlighting the 4000mAh high-capacity battery, indicating long-lasting battery life.

## WARRANTY & SUPPORT

For warranty information and technical support, please refer to the official AULA website or contact their customer service. Keep

your purchase receipt for warranty claims.

**Online Resources:**

- AULA Official Website: [www.aulagaming.com](http://www.aulagaming.com) (Please note: URL is a placeholder as no specific support URL was provided in the input. Users should refer to the product packaging or official brand channels for accurate support information.)
- Product Driver Download: Refer to the quick start guide or AULA's official website for the specific driver download link.

**Related Documents - F75 Pro**

	<p><a href="#">AULA F75 Mechanical Keyboard User Manual: Setup, Features, and Specifications</a></p> <p>Comprehensive user manual for the AULA F75 three-mode mechanical keyboard. Learn how to connect via wired, 2.4G, or Bluetooth, customize backlighting, and understand product specifications and warranty.</p>
	<p><a href="#">AULA WIND F75: 3-in-1 Hot-Swappable RGB Gasket Mechanical Keyboard User Manual</a></p> <p>Explore the features and specifications of the AULA WIND F75, a versatile 3-in-1 mechanical keyboard. This manual covers its hot-swappable switches, gasket structure, RGB lighting, connectivity options, and user guide.</p>



### [AULA F75 Mechanical Keyboard User Manual](#)

Discover the features and operating instructions for the AULA F75 3-in-1 Hot-Swappable RGB Gasket Mechanical Keyboard. This manual covers connectivity, functions, specifications, and troubleshooting.




### [AULA F75 Three-Mode Mechanical Keyboard User Manual](#)

Comprehensive user manual for the AULA F75 three-mode mechanical keyboard, featuring wired, 2.4G wireless, and Bluetooth connectivity. Includes setup, function descriptions, backlight adjustments, charging instructions, and warranty information.



[AULA F75 Keyboard User Manual: Connectivity and Features](#)

Comprehensive user guide for the AULA F75 keyboard, detailing 2.4G, Bluetooth, and wired connection modes, as well as multimedia and lighting controls. Includes instructions for Windows, macOS, and Android.



[AULA F75 Mechanical Keyboard User Manual and Connection Guide](#)

Comprehensive guide to the AULA F75 mechanical keyboard, covering its features, wired mode, ON/OFF instructions, and 2.4G wireless connection setup with manual code pairing.