

[manuals.plus](#) /

› [CITLLA](#) /

› [CITLLA K9100 Wireless Bluetooth Keyboard User Manual](#)

CITLLA K9100

CITLLA K9100 Wireless Bluetooth Keyboard User Manual

Model: K9100

PRODUCT OVERVIEW

The CITLLA K9100 is a full-size wireless Bluetooth keyboard designed for multi-device compatibility, featuring a comfortable wrist rest, 3-level adjustable backlighting, and a numeric keypad. It is rechargeable and built with quiet scissor-switch keys for an enhanced typing experience.



Figure 1: Top view of the CITLLA K9100 Wireless Bluetooth Keyboard.

KEY FEATURES

- **Full Size Design:** Standard 1:1 scale keyboard, suitable for various user habits.
- **Adjustable Comfort:** Features 3-level adjustable heights (low-medium-high) to optimize typing posture and reduce wrist discomfort.

- **Rechargeable Battery:** A two-hour charge provides approximately 60 days of use. The keyboard can be used while charging via its universal Type-C port. A charging cable is included.
- **Multi-Wireless Signal Channels:** Equipped with a 2.4G USB receiver and two Bluetooth channels, allowing connection and seamless switching between multiple devices.
- **Integrated Wrist Rest:** A comfortable leather wrist rest provides tactile support, reducing friction and pain during prolonged use.
- **Scissor-Switch Structure:** The X-structure key design ensures even force distribution, enhancing key durability and providing a quiet typing experience.
- **Durable Construction:** Weighing 720g (1.58lb), the keyboard includes an internal metal frame for increased robustness and longevity.
- **Backlit Keys:** Keys are equipped with LED lighting, which can be toggled on or off as needed.

SETUP GUIDE

1. Initial Charging

Before first use, fully charge the keyboard. Connect the provided USB-A to USB-C charging cable to the keyboard's Type-C port and a power source (e.g., computer USB port, USB wall adapter). The keyboard can be used while charging.



Figure 2: Connecting the USB-C charging cable to the keyboard.

2. Power On

Locate the On/Off switch on the right side of the keyboard and slide it to the 'On' position.

3. Connection Methods

The K910 keyboard supports three wireless signal channels:

1. 2.4G USB Receiver Mode:

Insert the 2.4G USB receiver into an available USB port on your computer. The keyboard will automatically connect. This is typically Channel 1.

2. Bluetooth 1 Mode:

Press and hold the Bluetooth 1 key (often labeled with a Bluetooth icon or '1') for 3-5 seconds until the indicator light flashes, indicating pairing mode. On your device (laptop, iPad, MacBook), go to Bluetooth settings and select "BT Keyboard" to connect.

3. Bluetooth 2 Mode:

Similar to Bluetooth 1, press and hold the Bluetooth 2 key (often labeled with a Bluetooth icon or '2') for 3-5 seconds. Connect to "BT Keyboard" from your second device's Bluetooth settings.



Figure 3: Illustrates the three wireless connection channels (2.4G USB, Bluetooth 1, Bluetooth 2) for connecting to various devices.

OPERATING INSTRUCTIONS

Adjusting Keyboard Height

The keyboard features a 3-level foldable stand on its underside. Gently pull out the stands to adjust the typing angle to your preferred comfort level (0°, 4.5°, or 8.3°).



3 Level Foldable Stand

Bottom Rubber, Silent/Non-slip



High 8.3°



middle 4.5°



low 0°

Figure 4: The keyboard's 3-level adjustable stand for ergonomic comfort.

Backlight Control

The keyboard's LED backlighting can be adjusted. Use the dedicated backlight control keys (often indicated by a sun icon) to cycle through different brightness levels or to turn the backlight on/off.

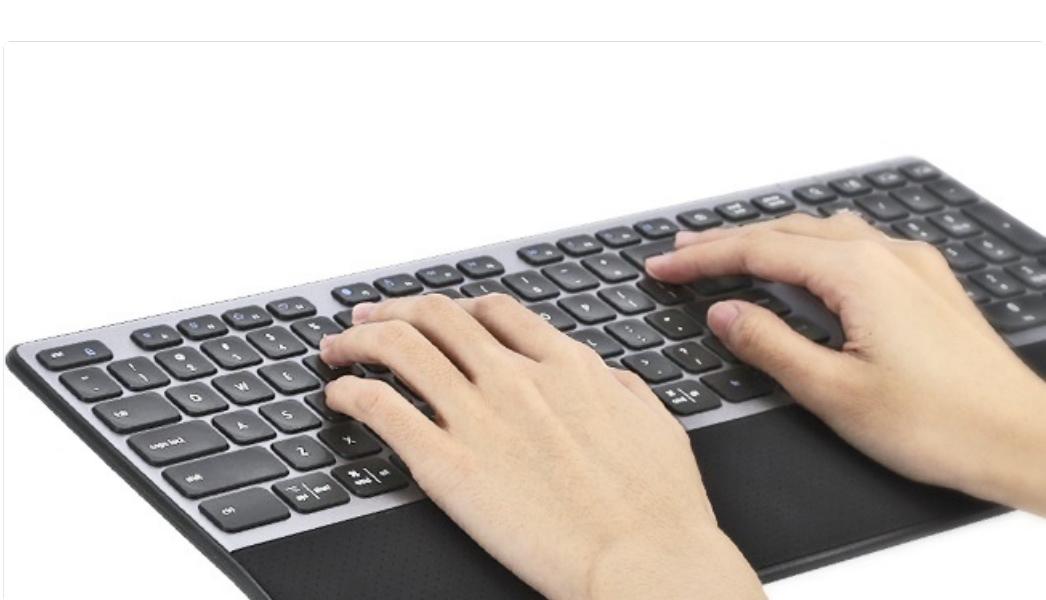


Figure 5: Keys for adjusting backlight intensity.

Function Keys Overview

The keyboard includes a range of function keys (F1-F12) that perform various tasks, often in combination with the 'Fn' key. Refer to the table below for common functions:

Key Combination	Function
Fn + F1	Turn up brightness
Fn + F2	Turn down brightness
Fn + F3	Open Browser
Fn + F4	Task View
Fn + F5	Lock Computer / Switch input method
Fn + F6	Pause
Fn + F7	Previous track
Fn + F8	Next track
Fn + F9	Mute
Fn + F10	Volume down
Fn + F11	Volume up
Fn + F12	Screenshot

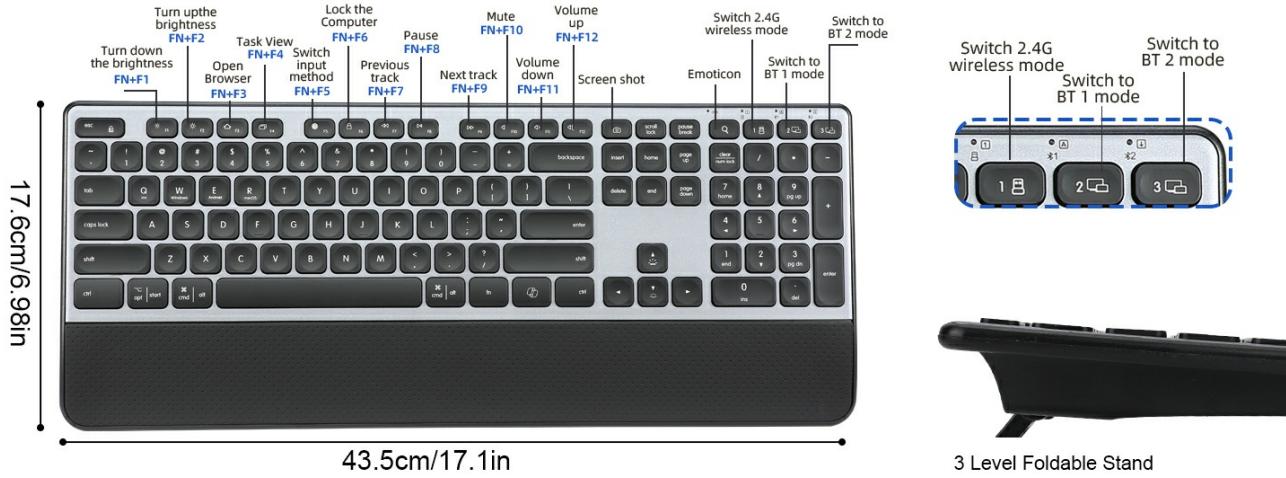


Figure 6: Layout of function keys and their corresponding actions.

MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to wipe the keyboard surface. For deeper cleaning, a slightly damp cloth with mild soap can be used, ensuring no liquid enters the key switches or internal components.
- **Storage:** Store the keyboard in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To prolong battery life, avoid fully discharging the keyboard frequently. Charge it when the low battery indicator appears.
- **Avoid Liquids:** Do not expose the keyboard to water or other liquids, as this can cause internal damage.

TROUBLESHOOTING

Keyboard not connecting:

- Ensure the keyboard is powered on.
- Check if the correct connection mode (2.4G, Bluetooth 1, Bluetooth 2) is selected and in pairing mode.
- Verify Bluetooth is enabled on your device and "BT Keyboard" is selected.
- Recharge the keyboard battery.
- Try restarting both the keyboard and your device.

Keys not responding or sticking:

- Ensure the keyboard is fully charged.
- Clean around the affected keys to remove any debris.
- If using 2.4G, try plugging the USB receiver into a different port.
- If using Bluetooth, try re-pairing the keyboard.

Backlight not working:

- Ensure the keyboard is powered on and has sufficient battery.
- Press the backlight control keys to cycle through brightness levels or turn it on.

Keyboard goes to sleep too quickly:

The keyboard enters sleep mode to conserve battery. Press any key to wake it up. Note that the first keystroke might not register as it wakes from sleep.

PRODUCT SPECIFICATIONS

Feature	Detail
Model Number	K9100
Product Dimensions	17.1" L x 6.98" W x 0.9" H (43.5cm x 17.6cm x 2.28cm)
Item Weight	1.58 lbs (720g)
Material	Plastic, Metal, Rubber
Connectivity Technology	Bluetooth, 2.4G USB-A
Compatible Devices	Laptop, PC, Tablet, Smartphone
Number of Keys	108
Battery	1 Lithium Ion battery (included)
Special Features	Backlit, Wrist Rest, Rechargeable

Product Size



Figure 7: Detailed product dimensions and weight.

OFFICIAL PRODUCT VIDEO

Your browser does not support the video tag.

Video 1: An official product video demonstrating the features of the CITLLA K9100 Wireless Bluetooth Keyboard, including its 3-level backlight and multi-device connectivity.

WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the contact details provided in the product packaging or visit the official CITLLA website. Ensure you retain your proof of purchase for warranty claims.

CITLLA is committed to providing quality computer accessories and offers positive pre-sales and after-sales service to address any issues customers may encounter.

You can also visit the [CITLLA Store on Amazon](#) for more information and products.

