

[Manuals.plus](#) /

› [Gawfolk](#) /

› Gawfolk 34-inch Ultrawide Curved Gaming Monitor - 165Hz UWQHD 3440x1440 with Height Adjustment (Model GF340C)

Gawfolk GF340C

Gawfolk 34-inch Ultrawide Curved Gaming Monitor

Model: GF340C

1. INTRODUCTION

Thank you for choosing the Gawfolk 34-inch Ultrawide Curved Gaming Monitor. This manual provides essential information for setting up, operating, maintaining, and troubleshooting your monitor. Please read it thoroughly before use to ensure optimal performance and safety.

Important Safety Information:

- Do not expose the monitor to rain or moisture to prevent fire or electric shock.
- Do not open the monitor casing. There are no user-serviceable parts inside. Refer all servicing to qualified service personnel.
- Place the monitor on a stable, flat surface to prevent it from falling.
- Ensure proper ventilation around the monitor. Do not block ventilation openings.
- Use only the power adapter supplied with the monitor.

2. PACKAGE CONTENTS

Verify that all items listed below are included in your package. If any items are missing or damaged, please contact your retailer.

- Monitor Screen x 1
- Stand x 1
- Base x 1
- Power Adapter x 1
- DP Cable x 1
- Screw Bag x 1

- User Manual x 1



Figure 2.1: Package Contents and Monitor Dimensions (approx. 80.77cm width, 44.38cm height)

3. SETUP

3.1 Assembling the Stand

1. Carefully remove the monitor from its packaging, keeping the screen protected.
2. Attach the stand neck to the monitor panel using the provided screws.
3. Connect the base to the stand neck and secure it with the remaining screws.
4. Place the assembled monitor on a stable, flat surface.

3.2 VESA Mount Installation (Optional)

This monitor supports VESA 75x75mm mounting. If you plan to use a VESA mount (not included), remove the stand assembly from the monitor panel. Attach your VESA-compatible mount to the monitor using appropriate screws, ensuring it is securely fastened.

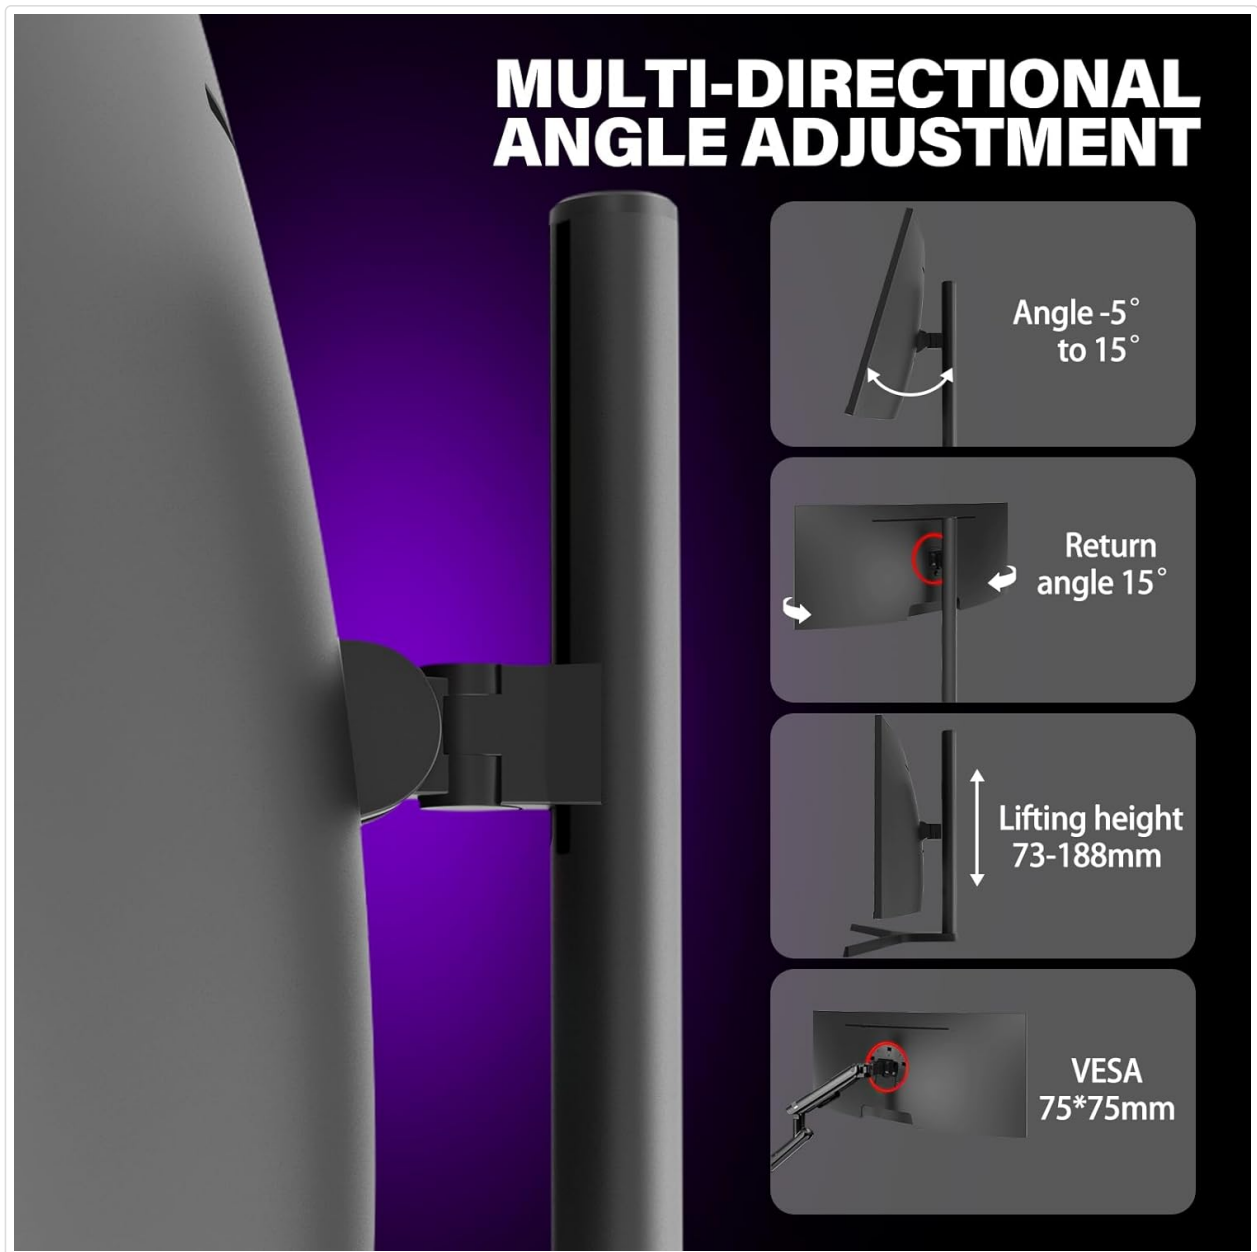


Figure 3.1: Stand Assembly and VESA Mounting Points

3.3 Connecting Cables

Connect the necessary cables to the monitor and your computer or other devices.

- **Power:** Connect the power adapter to the monitor's DC 12V input and then plug it into a power outlet.
- **DisplayPort (DP):** For optimal performance (up to 165Hz), connect the supplied DP cable from your computer's graphics card to one of the monitor's DP 1.4 ports.
- **HDMI:** Alternatively, connect an HDMI cable from your device to one of the monitor's HDMI 1.4 ports (supports up to 100Hz).
- **Audio Out:** Connect external speakers or headphones to the 3.5mm audio output jack if desired.



Figure 3.2: Monitor Connectivity Ports

4. OPERATING INSTRUCTIONS

4.1 Powering On/Off

Press the power button located on the monitor to turn it on or off. The power indicator light will illuminate when the monitor is on.

4.2 On-Screen Display (OSD) Menu

The OSD menu allows you to adjust various monitor settings. Use the control buttons (usually located on the back or bottom right of the monitor) to navigate the menu. Common adjustments include brightness, contrast, color temperature, input source, and gaming features.

4.3 Key Features and Adjustments

- **Ultrawide UWQHD Resolution (3440 x 1440):** Experience a wider field of view with the 21:9 aspect ratio, providing more screen space for multitasking and immersive gaming. This 34-inch display offers 34% more width than traditional 16:9 displays.

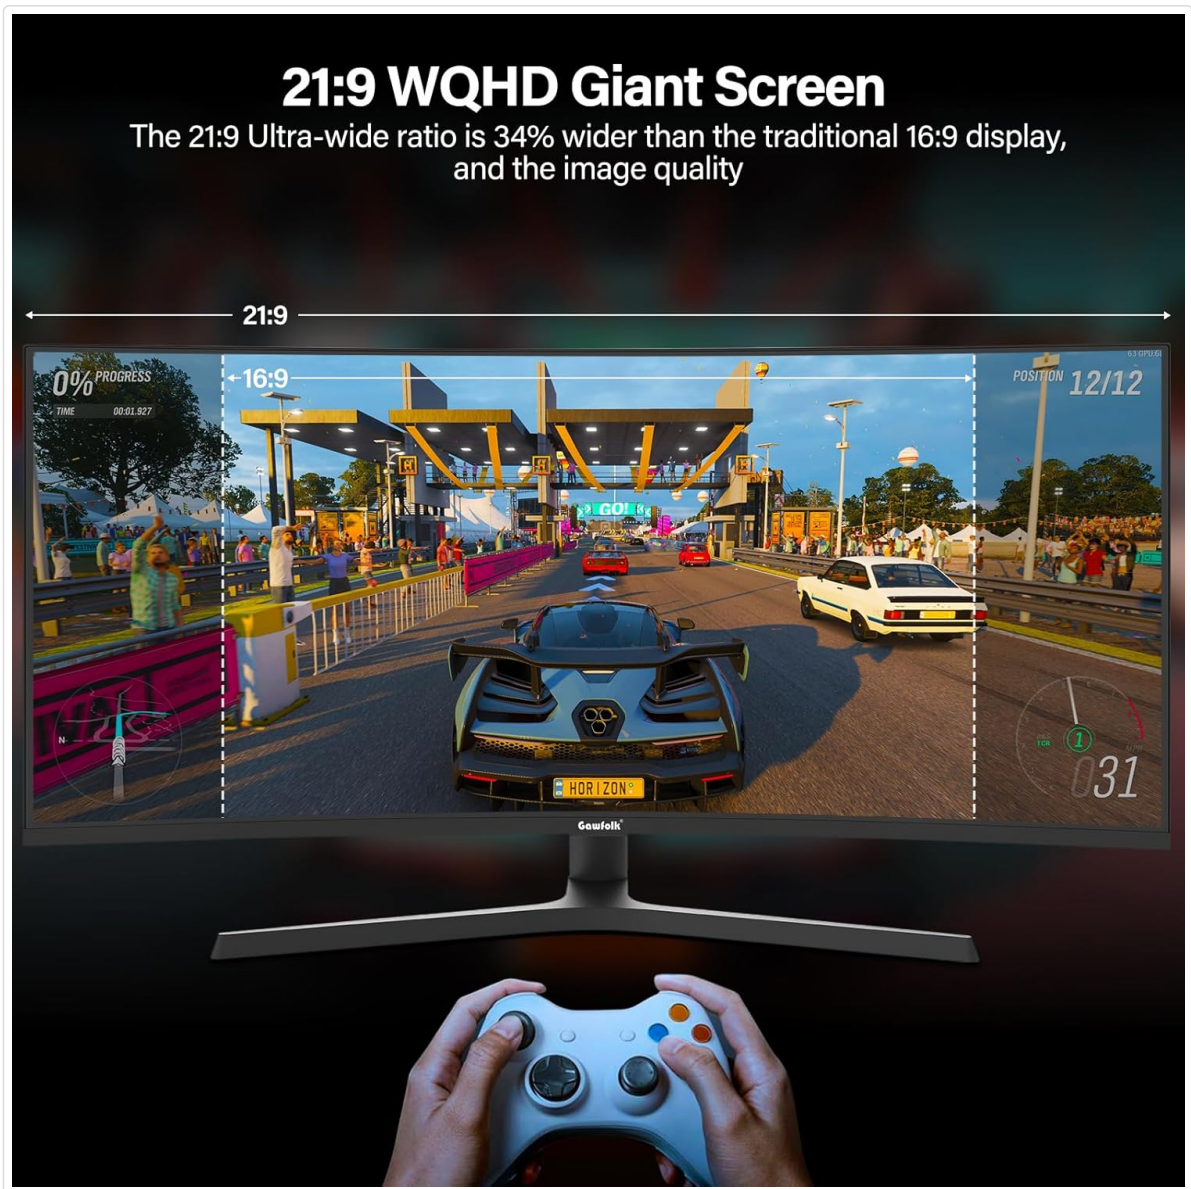


Figure 4.1: 21:9 UWQHD Display Advantage

- **165Hz Refresh Rate & Adaptive Sync (AMD FreeSync):** Enjoy smooth, fluid visuals with a high 165Hz refresh rate, minimizing motion blur and ghosting. Adaptive Sync technology synchronizes the monitor's refresh rate with your graphics card's frame rate, eliminating screen tearing and stuttering for a seamless gaming experience.



Figure 4.2: 165Hz Refresh Rate in Action

- **1500R Curvature:** The 1500R curved design matches the natural curvature of the human eye, providing a more immersive viewing experience and reducing eye strain during extended use.

Perfect Curvature for Immersive Experience

The curvaature design conforms to the natural vision of the human eye to improve the sensory experience of esports.



Figure 4.3: 1500R Curvature for Immersion

- **Eye Care Technology:** The monitor features Eye Saver Mode to reduce harmful blue light emissions and Flicker-Free technology to minimize screen flickering, helping to keep your eyes relaxed even during prolonged use.
- **Multi-Directional Angle Adjustment:** The redesigned stand allows for easy adjustment of height (73-188mm), tilt (-5° to 15°), and swivel, enabling you to find the optimal viewing angle for comfort and productivity.
- **Picture-in-Picture (PIP) / Picture-by-Picture (PBP) Mode:** Utilize the monitor's PIP/PBP modes to display content from multiple input sources simultaneously, enhancing multitasking capabilities.

5. MAINTENANCE

5.1 Cleaning the Monitor

- Always unplug the monitor from the power outlet before cleaning.
- Use a soft, lint-free cloth lightly dampened with water or a specialized screen cleaner.
- Do not use abrasive cleaners, waxes, or solvents as they may damage the screen or casing.
- Avoid spraying liquid directly onto the screen.

5.2 General Care

- Keep the monitor away from direct sunlight, heat sources, and extreme temperatures.
- Avoid placing heavy objects on the monitor or its cables.
- Do not drop or subject the monitor to strong impacts.

6. TROUBLESHOOTING

If you encounter issues with your monitor, please refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No image on screen	Power cable not connected; Input source incorrect; Graphics card issue	Ensure power cable is securely connected. Check power indicator. Select correct input source via OSD. Verify graphics card is working.
Image flickering	Loose video cable; Incorrect refresh rate; Interference	Check video cable connections. Set refresh rate to 165Hz in your operating system. Move away from other electronic devices.
Colors appear incorrect	Color settings in OSD; Damaged video cable	Adjust color settings in the OSD menu. Try a different video cable.
Adaptive Sync not working	Feature not enabled; Graphics card not compatible; Cable type	Ensure Adaptive Sync is enabled in the OSD and your graphics card settings. Use a DisplayPort cable. Verify your graphics card supports FreeSync.

7. SPECIFICATIONS

Feature	Specification
Brand	Gawfolk
Model Number	GF340C
Screen Size	34 Inches
Resolution	UWQHD 3440 x 1440p
Aspect Ratio	21:9
Curvature	1500R
Refresh Rate	165 Hz
Response Time	2 milliseconds
Panel Type	VA
Brightness	300 cd/m²
Contrast Ratio	4000:1
Color Gamut	72% NTSC

Feature	Specification
HDR Support	Yes
Adaptive Sync	FreeSync
Connectivity	2x HDMI 1.4 (up to 100Hz), 2x DisplayPort 1.4 (up to 165Hz), Audio Out
VESA Mount	75 x 75 mm
Power Consumption	60 Watt (typical)
Dimensions (P x L x H)	10P x 80L x 44H cm (approx.)
Weight	4.5 Kilograms


Produktdatenblatt

DELEGIERTE VERORDNUNG (EU) 2019/2013 DER KOMMISSION zur
Energieverbrauchskennzeichnung von elektronischen Displays

Parameter	Parameter oder Wert und Genauigkeit	Einheit
1. Name oder Warenzeichen des Lieferanten	Gawfolk	
Anschrift des Lieferanten	eVatmaster Consulting GmbH, Bettinastr. 30, 60325 Frankfurt am Main, DE	
2. Modellkennung	GF340C	
3. Energieeffizienzklasse bei Standard-Dynamikumfang (SDR)	F	
4. Leistungsaufnahme im Ein-Zustand bei SDR	28,5	W
5. Energieeffizienzklasse bei hohem Dynamikumfang (HDR)	F	
6. Leistungsaufnahme im Ein-Zustand bei hohem Dynamikumfang (HDR), falls vorhanden	29,5	W
7. Leistungsaufnahme im Aus-Zustand, falls zutreffend	0,3	W
8. Leistungsaufnahme im Bereitschaftszustand, falls zutreffend	0,5	W
9. Leistungsaufnahme im vernetzten Bereitschaftsbetrieb, falls zutreffend	2,0	W
10. Art des elektronischen Displays	Monitor	
11. Seitenverhältnis	16 : 9	
12. Bildschirmauflösung	3 440 x 1 440	pixels
13. Bildschirmdiagonale	86,4	cm
14. Bildschirmdiagonale	34	Zoll
15. Sichtbare Bildschirmfläche	26,6	dm²
16. Verwendete Panel-Technologie	LED LCD	
17. Automatische Helligkeitsregelung (ABC) vorhanden	Nein	
18. Spracherkennungssensor vorhanden	Nein	
19. Anwesenheitssensor vorhanden	Nein	
20. Bildwiederholfrequenz (Standard)	50	Hz
21. Mindestens garantierte Software- und Firmware-Aktualisierungen (ab dem Datum der Beendigung des Inverkehrbringens)	-	Jahre
22. Mindestens garantierte Verfügbarkeit von Ersatzteilen (ab dem Datum der Beendigung des Inverkehrbringens)	-	Jahre
23. Mindestens garantierte Produktunterstützung	-	Jahre
Mindestlaufzeit der vom Lieferanten angebotenen allgemeinen Garantie	-	Jahre
24. Art der Stromversorgung (Netzteil)	Extern	
25. Externes Netzteil (nicht genormt, in der Verkaufsverpackung enthalten)		

Seite 1 / 2

i	-	
ii	Eingangsspannung	- V
iii	Ausgangsspannung	- V
26.	Genormtes externes Netzteil (oder geeignetes Netzteil, falls nicht in der Verkaufsverpackung enthalten)	
i	-	
ii	Benötigte Ausgangsspannung	- V
iii	Benötigte (Mindest-)Stromstärke	- A
iv	Benötigte Stromfrequenz	- Hz



Seite 2 / 2

Figure 7.1: Product Datasheet



ENERG



Gawfolk

GF340C




G**29** kWh/1000h

ABCDEF**G**

HDR

30 kWh/1000h

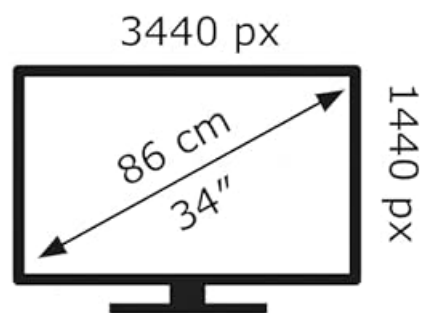

2019/2013

Figure 7.2: Energy Label

For more details, refer to the EPREL database: <https://eprel.ec.europa.eu/qr/1681210>

8. WARRANTY AND SUPPORT

8.1 Warranty Information

Gawfolk monitors are designed and manufactured to the highest quality standards. This product is covered by a limited warranty from the date of purchase. Please refer to the warranty card included in your package or contact your retailer for specific warranty terms and conditions.

8.2 Customer Support

If you have any questions, require technical assistance, or experience issues not covered in this manual, please contact Gawfolk customer support or your authorized retailer. Please have your model number (GF340C) and purchase information ready when contacting support.

