

[Manuals.plus](#) /

› [Canarm](#) /

› Canarm Bellamy 3-Light Flush Mount Ceiling Light Instruction Manual

## Canarm IFM1149A15BK

# Canarm Bellamy 3-Light Flush Mount Ceiling Light Instruction Manual

Model: IFM1149A15BK

Brand: Canarm

## INTRODUCTION

---

Thank you for choosing the Canarm Bellamy 3-Light Flush Mount Ceiling Light. This fixture is designed to provide stylish and functional illumination for various indoor spaces. This manual provides detailed instructions for safe installation, operation, and maintenance of your new lighting fixture. Please read all instructions carefully before beginning installation and retain this manual for future reference.



Image: The Canarm Bellamy 3-Light Flush Mount Ceiling Light, featuring a black rattan-style drum shade and a matte black finish.

## SAFETY INFORMATION

---

**WARNING:** Risk of electric shock. Disconnect power at the circuit breaker or fuse box before installation or servicing. Improper wiring can result in electric shock or fire.

- All electrical connections must be in accordance with local codes and ordinances, National Electric Code (NEC), and ANSI/NFPA 70-1999.
- Consult a qualified electrician if you are unsure about wiring procedures.
- Use only UL/cUL listed wire connectors.
- This fixture is intended for indoor use only.
- Do not exceed the maximum wattage specified for the bulbs.
- Ensure the fixture is securely mounted to a structural element of the ceiling.

## PACKAGE CONTENTS

---

Carefully unpack your fixture and check that all parts are included. If any parts are missing or damaged, contact customer service before proceeding with installation.

- Bellamy 3-Light Flush Mount Fixture (1)
- Rattan-style Shade (1)
- Mounting Hardware Kit (1) - Includes mounting bracket, screws, wire connectors.
- Instruction Manual (1)

**Note:** Light bulbs are **not** included and must be purchased separately.

## SETUP AND INSTALLATION

---

Follow these steps to safely install your Canarm Bellamy flush mount ceiling light. It is recommended to have a second person assist during installation.

1. **Turn Off Power:** Locate the circuit breaker or fuse box that controls the power to the light fixture location. Turn off the power completely to prevent electrical shock.
2. **Prepare Mounting Surface:** Ensure the junction box in your ceiling is securely mounted and capable of supporting the weight of the fixture.
3. **Attach Mounting Bracket:** Secure the mounting bracket (included in hardware kit) to the junction box using the provided screws. Ensure it is firmly attached.



Image: Underside of the fixture, illustrating the central mounting plate and wiring area.

#### 4. Make Electrical Connections:

- Connect the **black** wire from the fixture to the **black** (hot) wire from the ceiling using a wire connector.
- Connect the **white** wire from the fixture to the **white** (neutral) wire from the ceiling using a wire connector.
- Connect the **ground** wire (bare copper or green) from the fixture to the **ground** wire from the ceiling (or to the green ground screw on the mounting bracket) using a wire connector.

Ensure all connections are secure and no bare wire is exposed. Tuck wires carefully into the junction box.

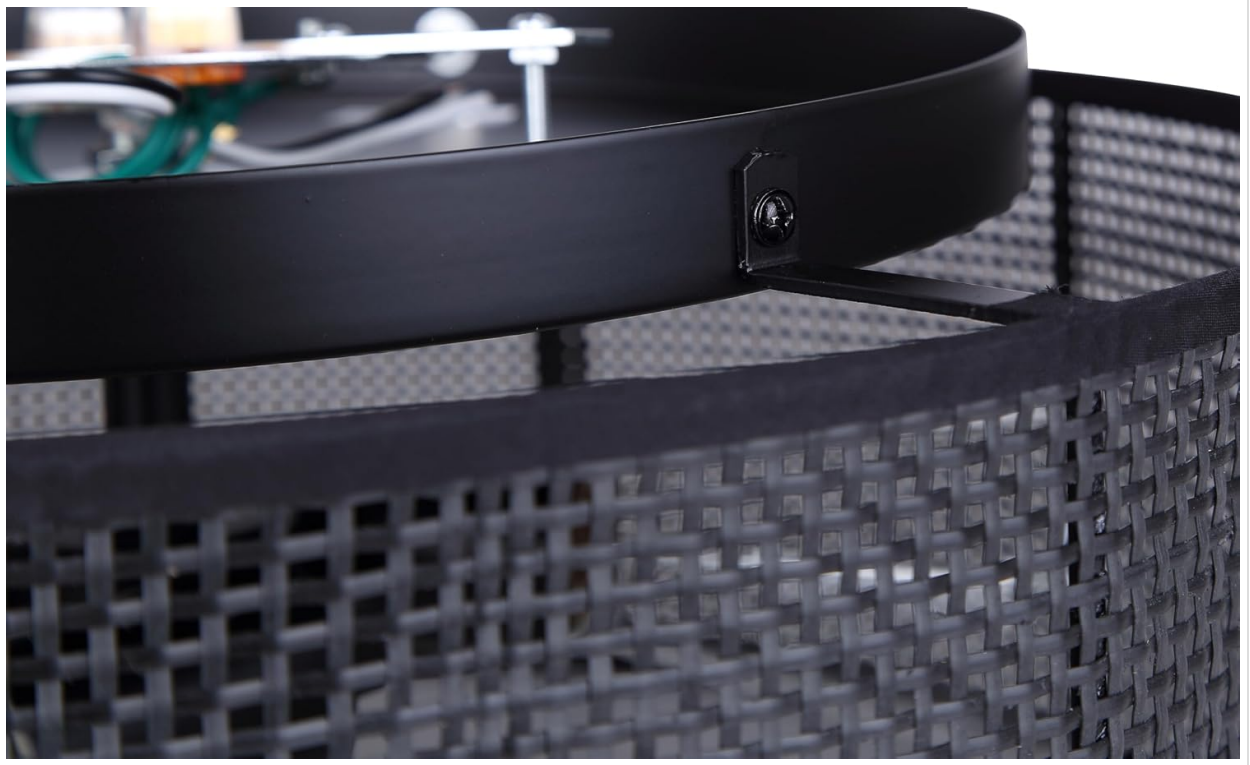


Image: Detail of the fixture's base, showing how the metal frame attaches to the mounting plate.

5. **Secure Fixture to Mounting Bracket:** Align the fixture base with the mounting bracket and secure it using the provided screws. Ensure the fixture is flush against the ceiling and stable.
6. **Install Light Bulbs:** Screw three (3) Type A bulbs (E26 base, max 60W each, not included) into the sockets.



Image: The fixture's interior, displaying the three E26 bulb sockets before the shade is attached.

7. **Attach Shade:** Carefully place the rattan-style shade onto the fixture and secure it according to the design (typically by twisting or using small screws/clips).
8. **Restore Power:** Once installation is complete and all connections are secure, restore power at the circuit breaker. Test the light fixture.

## OPERATING INSTRUCTIONS

---

The Canarm Bellamy fixture is designed for simple operation.

- **Power On/Off:** Control the light using a standard wall switch connected to the fixture's circuit.
- **Bulb Requirements:** This fixture requires three (3) Type A bulbs with an E26 base. Each bulb should not exceed 60 watts. LED bulbs are recommended for energy efficiency.
- **Dimmable Feature:** The fixture is dimmable. To utilize this feature, ensure you use dimmable bulbs and connect the fixture to a compatible toggle dimmer switch (sold separately).

## MAINTENANCE

---

Regular maintenance will help preserve the appearance and functionality of your light fixture.

- **Cleaning:** Always disconnect power before cleaning. Wipe the fixture with a soft, dry cloth. Do not use abrasive cleaners, solvents, or polishes as they may damage the finish.
- **Bulb Replacement:** Ensure power is off and bulbs have cooled before attempting to replace them. Unscrew old bulbs and screw in new ones of the correct type and wattage.
- **Inspection:** Periodically check all connections and mounting hardware to ensure they remain secure.

## TROUBLESHOOTING

If you encounter issues with your light fixture, refer to the following common problems and solutions:

| Problem                | Possible Cause                                                                  | Solution                                                                                                                         |
|------------------------|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Light does not turn on | No power to the fixture<br>Loose wire connections<br>Faulty bulb                | Check circuit breaker/fuse.<br>Verify all wire connections are secure (with power off).<br>Replace bulb with a new one.          |
| Light flickers         | Loose wire connection<br>Incorrect bulb type for dimmer<br>Faulty dimmer switch | Check wire connections (with power off).<br>Ensure dimmable bulbs are used with a dimmer.<br>Replace dimmer switch if necessary. |
| Fixture is unstable    | Mounting screws loose<br>Improperly secured mounting bracket                    | Tighten mounting screws.<br>Re-secure mounting bracket to junction box.                                                          |

## SPECIFICATIONS

Detailed technical specifications for the Canarm Bellamy 3-Light Flush Mount Ceiling Light.



Image: Dimensional drawing of the fixture, indicating a width of 16.25 inches and a height of 6.88 inches.

| Feature                | Detail                           |
|------------------------|----------------------------------|
| Model Number           | IFM1149A15BK                     |
| Dimensions (L x W x H) | 16.25" x 16.25" x 6.88"          |
| Weight                 | 5.17 pounds                      |
| Material               | Metal (Fixture), Plastic (Shade) |
| Color                  | Black                            |

| Feature                 | Detail                                        |
|-------------------------|-----------------------------------------------|
| Number of Light Sources | 3                                             |
| Bulb Base               | E26                                           |
| Max Wattage per Bulb    | 60 watts (Type A)                             |
| Voltage                 | 120 Volts                                     |
| Dimmable                | Yes (with compatible bulbs and dimmer switch) |
| Installation Type       | Flush Mount                                   |
| Indoor/Outdoor Usage    | Indoor                                        |
| Assembly Required       | Yes                                           |

## WARRANTY INFORMATION

This Canarm Bellamy 3-Light Flush Mount Ceiling Light is covered by a **1-year manufacturer's warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use. It does not cover damage resulting from improper installation, accident, misuse, abuse, or unauthorized modifications. Please retain your proof of purchase for warranty claims.

## CUSTOMER SUPPORT

For technical assistance, missing parts, or warranty inquiries, please contact Canarm customer service. Refer to the contact information provided with your product packaging or visit the official Canarm website for support details.  
**Website:** [www.canarm.com](http://www.canarm.com) (Please check product packaging for specific contact details.)

### ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

## Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

---

Open the live page

<https://manuals.plus/asin/B0D8JY5B2K>

More documents and user manuals: <https://manuals.plus/>