

[Manuals.plus](#) /

› [alphatronics](#) /

› alphatronics SLA-22 DW Smart TV User Manual

alphatronics SLA-22 DW

alphatronics SLA-22 DW Smart TV User Manual

Model: SLA-22 DW (990977)

INTRODUCTION

The alphatronics SLA-22 DW is a 22-inch (55cm) Full-HD Smart TV specifically designed for use in motorhomes, caravans, and boats. It operates on both 12V and 24V power supplies, making it ideal for mobile applications. This television features an integrated soundbar for enhanced audio quality, a built-in DVD player, and the intuitive webOS Hub operating system for access to various streaming services and applications.

Key features include:

- **Integrated Soundbar:** Unique 12V TV with a built-in soundbar for optimized audio in mobile environments.
- **100% Pixel-Error-Free Panels:** Ensures a high-quality visual experience.
- **178° Viewing Angle:** Consistent image quality from various positions within your vehicle.
- **webOS Hub:** Simple and intuitive operating system providing access to popular apps like Netflix, Amazon Prime Video, Disney+, and YouTube.
- **Triple Tuner:** Supports DVB-S2, DVB-T2, and DVB-C for versatile reception.
- **Bluetooth Connectivity:** For connecting external audio devices.
- **Magic Remote:** Features voice commands and Air Mouse functionality for easy navigation.



Image: The alphatronics SLA-22 DW Smart TV, showcasing its sleek design and display.

SAFETY INFORMATION

Please read all safety instructions carefully before operating the device. Keep this manual for future reference.

- **Power Supply:** Use only the specified 12V/24V power cable provided. Ensure correct polarity when connecting to a vehicle's power system.
- **Ventilation:** Do not block ventilation openings. Ensure adequate space around the TV for proper airflow to prevent overheating.
- **Moisture:** Do not expose the TV to rain or moisture. Do not place objects filled with liquids, such as vases, on the TV.
- **Cleaning:** Disconnect the power cord before cleaning. Use a soft, dry cloth. Do not use liquid cleaners or aerosol cleaners.
- **Mounting:** If wall-mounting, ensure the mounting bracket is suitable for the TV's weight and the wall structure can support it securely, especially in a moving vehicle.
- **Temperature:** Avoid exposing the TV to extreme temperatures or direct sunlight for prolonged periods.
- **Service:** Do not attempt to service this product yourself. Refer all servicing to qualified service personnel.

WHAT'S IN THE BOX

Upon unpacking, please verify that all the following items are included:

- alphatronics TV
- Magic Remote Control
- 12V / 24V Cigarette Lighter Cable
- DVB-T Antenna (alphatronics AN5)
- Instruction Manual
- Other accessories (e.g., batteries for remote)

Enregistrement PVR

Ne manquez plus jamais votre programme préféré ! La fonction d'enregistrement, appelée PVR, vous permet d'enregistrer vos programmes préférés et de les lire ensuite à votre convenance. La fonction Timeshift vous permet de mettre en pause un programme, de revenir en arrière ou bien d'avancer rapidement.

Mise au point sur l'écran

Faites l'expérience de nos écrans dans la plus haute qualité. Avec des caractéristiques impressionnantes telles qu'un grand angle de 178° horizontalement et verticalement, une classe d'erreur de pixel 0 (aucune erreur de pixel autorisée) et une surface mate, nous vous garantissons toujours une image parfaite, quelles que soient les conditions.



GERMAN QUALITY
- SINCE 1999 -
ASSEMBLED IN GERMANY




Modèle	SLA22DW	
SMART	Plateforme SMART ²	webOS Hub ⁵
	Netrange ¹	-
	APP Store	Content Store
MISE À JOUR	Mise à jour OTA (Over The Air)	•
	Mise à jour manuelle via USB	-
ALIMENTATION	Tension d'entrée	10,5 - 30 V DC
	Interrupteur marche/arrêt	•
	Puissance absorbée kWh/1000h	15
	Puissance absorbée en veille	< 0,5 W
	Classe énergétique	E
CARACTÉRISTIQUES	Minuterie de sommeil	•
	Menu graphique OSD	français / multilingue
	Contrôle parental	•
	LG Channels / LG Fitness	• / •
	Maison intelligente : Matter IoT	•
	Apple AirPlay / HomeKit ⁶	• / •
PROTECTION	Électronique protégée contre la corrosion	•
	Protection contre les surtensions	•
	Protection contre les inversions de polarité	•
GÉNÉRALITÉS	Dimensions avec base (L x H x P)	502 x 365 x 175 mm
	Dimensions sans base (L x H x P)	502 x 330 x 50 mm
	Poids (avec / sans pied en kg)	3.60 kg / 3.40 kg
	Couleur	anthracite brossé
	Norme VESA	100 x 100 mm
ACCESSOIRES ³	Téléviseur, télécommandes, antenne TNT, câble 12V allume-cigare,	
	Accessoires de montage, manuel d'instruction	
HOMOLOGATIONS	CE, UKCA, ECE-R10	
EAN CODE	ID du produit	SLA22DW
	Numéro d'article interne	990977
	EAN	4260037135021

Étiquette énergétique



Dimensions

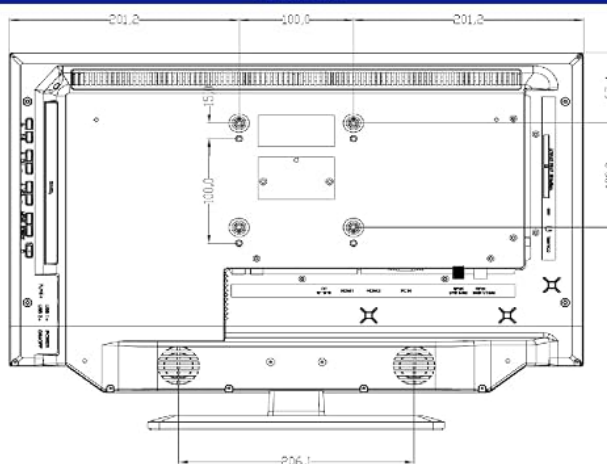

*Pied de béquie disponible en option

NOTES JURIDIQUES

¹Les produits avec Netrange comprennent NetFront Browser BE d'ACCESS Co. Ltd. ACCESS, le logo ACCESS Powered et NetFront sont des marques commerciales ou des marques déposées d'ACCESS Co. Ltd. au Japon, aux États-Unis et/ou dans d'autres pays. ²Les services de streaming ainsi que les applications peuvent être modifiés ou interrompus par le fournisseur sans préavis. La disponibilité des services de streaming varie selon les régions. ³Les accessoires peuvent varier légèrement en fonction de la région, du revendeur ou de la variante d'équipement. ⁴Google® et Android® sont des marques commerciales de Google Inc. ⁵webOS Hub et ThinQ sont des marques commerciales de LG Electronics Inc. ⁶Apple, le logo Apple, AirPlay et HomeKit, sont des marques commerciales d'Apple Inc. enregistrées aux États-Unis et dans d'autres pays et régions. ⁷La marque verbale et les logos Bluetooth® sont des marques déposées appartenant à Bluetooth SIG, Inc. et toute utilisation de ces marques par alphonics se fait sous licence. Les autres noms ou désignations mentionnés peuvent être des marques commerciales ou des marques déposées de leurs propriétaires respectifs.



Câble de connexion de haute qualité
Comprend le câble de connexion breveté du dispositif PRO CAR pour un maintien sûr dans le véhicule.



Vous avez besoin d'accessoires supplémentaires tels qu'un bloc d'alimentation ou un support ? Pas de problème ! Vous pouvez vous les procurer dans le commerce ou dans notre magasin de pièces détachées à l'adresse suivante : www.alphonics.de

SETUP

Power Connection (12V/24V)

The alphanonics SLA-22 DW is designed for mobile use and can be powered by a 12V or 24V DC supply. Use the provided cigarette lighter cable to connect the TV to your vehicle's power outlet. Ensure the connection is secure.

Antenna Connection

For terrestrial digital television (DVB-T/T2) reception, connect the supplied DVB-T antenna to the antenna input port on the TV. For satellite (DVB-S2) or cable (DVB-C) reception, connect your respective antenna or cable to the appropriate input.

Initial Setup and First Use

1. Connect the TV to power and your chosen antenna.
2. Press the power button on the TV or remote control to turn it on.
3. Follow the on-screen instructions for initial setup, including language selection, country, and network connection (Wi-Fi).
4. Perform a channel scan to find available TV channels.

Wall Mounting

The TV supports wall mounting. Refer to the technical specifications for VESA mounting dimensions (e.g., 100x100mm). Use a compatible wall mount bracket (not included) and ensure it is securely installed according to the bracket's instructions and suitable for mobile environments.



powered by
webOS Hub

Gamme SLA+

Découvrez un son de qualité supérieure avec notre gamme SLA+ ! La barre de son intégrée et les haut-parleurs frontaux élèvent l'expérience audio à un niveau supérieur. Entrez en immersion sensorielle avec son riche et clair et profitez de vos contenus avec une qualité audio inégalée.

La nouvelle génération est là

Découvrez le téléviseur du futur grâce à la nouvelle génération de webOS Hub ! Découvrez des fonctions avancées telles que l'enregistrement PVR, Timeshift, Apple AirPlay et le protocole de communication Matter intégré dans nos téléviseurs et vivez une toute nouvelle expérience TV.

AirPlay et HomeKit

Apple et alphatronics - simple comme bonjour ! Grâce à la fonction Apple AirPlay, diffusez le contenu de votre iPhone ou iPad sur votre téléviseur alphatronics ! La fonction Apple HomeKit vous donne le contrôle total de votre maison, même lorsque vous êtes en déplacement. Intégrez vos appareils compatibles HomeKit dans votre application Home et créez un environnement smart dans votre véhicule.

Modèle	SLA22DW	
ECRAN	Taille de l'écran	22" / 55 cm
	Type d'écran	Écran large à LED
	Format d'image	Écran large 16:9
	Angle de vue	178° (H) / 178° (V)
	Résolution	1920 x 1080 / Full-HD
	Rapport de contraste	1000:1
	Luminosité	350 cd/m²
	Temps de réponse	< 5 ms
	Modes d'image	5
	CIS (Color Improvement System) d'alphatronics	*
SON	Sortie musicale (RMS)	2 x 5 W
	Haut-parleur intégré	*
	Son stéréo	*
	alphatronicsAUDIO+	*
	Modes de son	5
Bluetooth®	Version Bluetooth®	5.0
	Portée Bluetooth®	30 m
	Bluetooth® surround	*
	Direction de la lecture	Émetteur et Récepteur
RECEPTION	Triple tuner intégré	*
	(DVB-S/S2 + DVB-T/T2 + DVB-C)	
	Encodage vidéo	MPEG-2 / MPEG-4
RECEPTION (SAT)	Normes HEVC	H.264 / H.265
	Emplacement du module CI+	* / Version 1.4
	HbbTV	*
	Balayage automatique des stations	*
	Liste de chaînes préinstallées	spécifique au pays
	Import des chaînes du module CI+	*
	LCN (Logical Channel Numbering)	*
	Guide électronique des programmes (EPG)	*
	Indication de la qualité du signal (DVB-S/S2)	*
	Télétexte (système TOP)	*
LISTE DES CHAÎNES	Liste de favoris	*
	Nombre maximal de chaînes : DVB-T/C	500
	Nombre maximal de chaînes : DVB-S2	4000
PVR	Fonction PVR déverrouillée	*
	Timeshift	*
	EPG / Enregistrement programmé	* / *
	Enregistrement sur disque dur	-
	stockage pris en charge (via SSD ou clé USB)	max. 1 TB
MULTIMÉDIA	Lecteur DVD intégré	*
	Taille du DVD pris en charge	Standard
	Formats DVD	*
	(CD, DVD, VCD, MP3, DVD-R, DVD-RW, DivX, JPEG)	
	Lecteur multimédia intégré	*
PORTS	Raccordement F (SAT)	*
	Connecteur IEC (antenne)	*
	Prise HDMI™	2x
	HDMI™ : Support ARC / CEC	* / *
	AV IN / AV OUT	* / -
	Sortie casque (3,5 mm)	*
	Toslink / SPDIF (optique)	*
	RCA IN (Audio/Vidéo)	-
	Sortie coaxiale numérique	-
	Prise USB (norme 2.0) / Sortie (mA)	2x / 1 A (max.)
RÉSEAU	WiFi bi-bande - 2.4GHz / 5 GHz	* / *
	Antenne Wifi externe	*
	RJ45 (LAN)	*

OPERATING INSTRUCTIONS

Basic TV Functions

Use the Magic Remote to navigate menus, change channels, adjust volume, and select input sources. The TV features a triple tuner for DVB-S2, DVB-T2, and DVB-C, allowing reception from various sources.

Smart TV Features (webOS Hub)

The webOS Hub provides a user-friendly interface to access a wide range of smart features. Connect the TV to Wi-Fi to enjoy streaming services and apps.

- **Home Screen:** Access your favorite apps, inputs, and settings from the customizable home screen.
- **Streaming Apps:** Pre-installed apps like Netflix, Amazon Prime Video, Disney+, and YouTube are readily available.
- **App Store:** Download additional applications from the integrated app store.



powered by
webOS Hub

Image: The webOS Hub smart TV interface, showing various application icons and input options.

Integrated Soundbar

The front-facing integrated soundbar enhances audio clarity and depth, providing a superior listening experience compared to standard TV speakers, especially in the confined spaces of a motorhome or caravan.



L'unique téléviseur connecté 12V avec barre de son intégrée

Image: Close-up view of the alphatronics TV, highlighting the integrated soundbar located at the bottom of the screen.

DVD Player Usage

The integrated DVD player allows you to watch movies directly on the TV. Insert a DVD into the slot on the side of the TV. The TV will automatically switch to DVD mode or prompt you to select it.



Lecteur DVD intégré

Image: The alpatronics TV displaying a movie scene, with a DVD disc floating nearby, indicating the integrated DVD player functionality.

Bluetooth Connectivity

Pair Bluetooth-enabled devices such as headphones or external speakers with your TV for a personalized audio experience. Navigate to the Bluetooth settings in the TV menu to pair new devices.

Magic Remote Control

The Magic Remote offers advanced control features:

- **Voice Commands:** Press the voice button and speak commands (e.g., "Open YouTube") to control the TV.
- **Air Mouse:** Point and click on the screen like a mouse for intuitive navigation.



La télécommande Magic vous permet d'effectuer des commandes vocales (par exemple „Ouvrir YouTube“)

Image: The Magic Remote control, with graphical representations of voice command and Air Mouse functionalities.

CI Slot (Common Interface)

The integrated CI Slot allows you to insert a CAM (Conditional Access Module) and a smart card for receiving encrypted pay TV channels (e.g., FRANSAT). Ensure the CAM and smart card are correctly inserted.



CI Slot intégré : Idéal pour TV payante (par exemple FRANSAT)

Image: The alpatronics TV with a graphic highlighting the integrated CI Slot, indicating its use for pay TV services.

MAINTENANCE

Cleaning the TV

Before cleaning, always unplug the TV from the power source.

- **Screen:** Gently wipe the screen with a soft, lint-free cloth. For stubborn marks, slightly dampen the cloth with water or a specialized screen cleaner. Never spray liquid directly onto the screen.
- **Cabinet:** Use a soft, dry cloth to wipe the TV cabinet. Do not use abrasive pads, powders, or strong solvents like alcohol or benzene, as these may damage the finish.

Storage

If storing the TV for an extended period, ensure it is disconnected from power and stored in a cool, dry place, away from direct sunlight and extreme temperatures.

TROUBLESHOOTING

This section provides solutions to common issues you might encounter. If the problem persists, please contact customer support.

Problem	Possible Cause	Solution
No power	Power cable not connected; vehicle power issue.	Ensure the 12V/24V cable is securely connected. Check vehicle's power outlet/fuse.
No picture, but sound is present	Incorrect input source selected; display settings.	Press the "Input" button on the remote to select the correct source (e.g., DTV, HDMI, DVD).
No channels found during scan	Antenna not connected or positioned correctly; weak signal.	Check antenna connection. Adjust antenna position. Perform another channel scan.
Smart TV features not working (e.g., Netflix)	No internet connection; app issue.	Check Wi-Fi connection in settings. Restart the TV. Update the app if an update is available.
DVD not playing	Disc is dirty or damaged; incorrect region code.	Clean the DVD disc. Ensure the disc is inserted correctly.
Remote control not responding	Batteries are low or incorrectly inserted; obstruction.	Replace batteries. Ensure no obstruction between remote and TV. Re-pair the Magic Remote if necessary.

SPECIFICATIONS

Detailed technical specifications for the alphonics SLA-22 DW TV:

Feature	Detail
Brand	MOBILETV (alphatronics)
Model Number	990977 (SLA-22 DW)
Screen Size	22 Inches / 55 cm
Display Technology	LED
Resolution	Full HD (1920 x 1080p)
Refresh Rate	60 Hz
Viewing Angle	178° (H) / 178° (V)
Special Feature	Integrated Front Soundbar
Connectivity Technology	Bluetooth, Wi-Fi, USB, Ethernet, HDMI
HDMI Ports	2
USB Ports	1
Power Supply	12V / 24V DC
Dimensions (L x W x H)	5 x 50.2 x 33 cm (approx. 1.97 x 19.76 x 12.99 inches)
Weight	3.4 kg (approx. 7.5 lbs)
Energy Efficiency Class	E

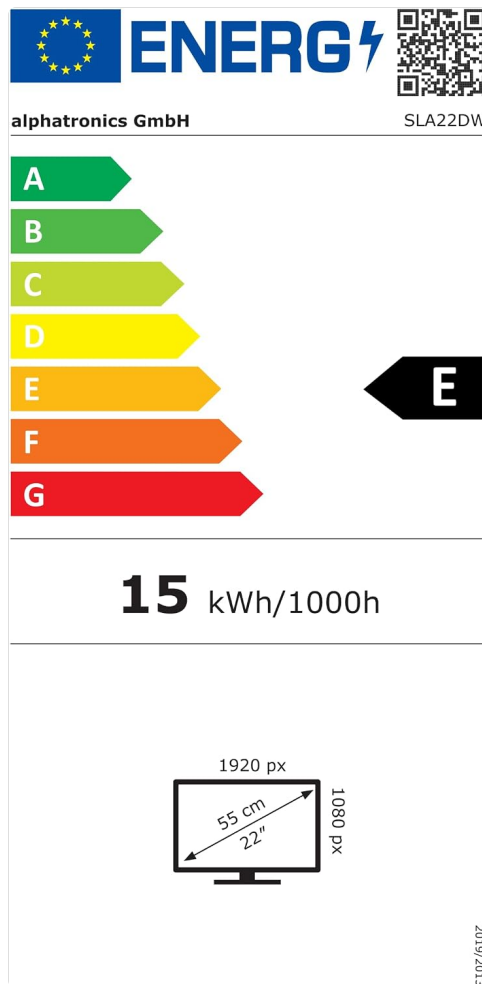


Image: The EU energy efficiency label for the alphatronics SLA-22 DW, showing its 'E' rating and energy consumption.

For more details, visit the [EPREL database](#).

WARRANTY AND SUPPORT

The alphatronics SLA-22 DW TV comes with a **3-year warranty**, ensuring peace of mind regarding product quality and reliability. This product is assembled in Germany, emphasizing high manufacturing standards.

Spare Parts Availability: Spare parts for this model are available for **7 years** from the date of purchase, ensuring long-term support and repairability.

For technical support, warranty claims, or service inquiries, please refer to the contact information provided on the alphatronics official website or your point of purchase.



Livré avec

- Téléviseur alphasatronics
- Télécommande Magic
- Antenne Hertzienne alphasatronics AN5
- Antenne WIFI extérieure
- Câble allume-cigare 12/24V
- Mode d'emploi
- Autres accessoires

Image: Side view of the alphasatronics TV, accompanied by badges indicating "German Quality," "3 Years Warranty," and "100% Defect-Free Pixels."

© 2024 alphasatronics. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question