

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [MUBVIEW](#) /

› [MUBVIEW Solar Security Camera User Manual](#)

MUBVIEW ZS-GX8S

MUBVIEW Solar Security Camera User Manual

Model: ZS-GX8S

1. INTRODUCTION

Thank you for choosing the MUBVIEW Solar Security Camera. This manual provides essential information for setting up, operating, and maintaining your camera to ensure optimal performance and security for your property. This 2K 360° PTZ camera is designed for outdoor use, offering comprehensive surveillance with its advanced features and solar-powered efficiency.



Figure 1: MUBVIEW Solar Security Camera (Model ZS-GX8S)

2. WHAT'S IN THE Box

Please check the contents of your package to ensure all items are present:

- MUBVIEW Solar Security Camera
- Solar Panel
- Mounting Bracket
- Screws and Wall Plugs
- USB Charging Cable
- User Manual (this document)

3. PRODUCT FEATURES

3.1. 2K FHD Image & All-Round Security

The camera provides 2K (3MP) Full High Definition video resolution, ensuring clear and detailed images. It features 360° PTZ (Pan 355°, Tilt 120°) coverage with a 120° wide-angle lens, allowing you to monitor a large area. Enhanced color night vision extends up to 55 feet, supported by two integrated spotlights for improved visibility in low-light conditions.

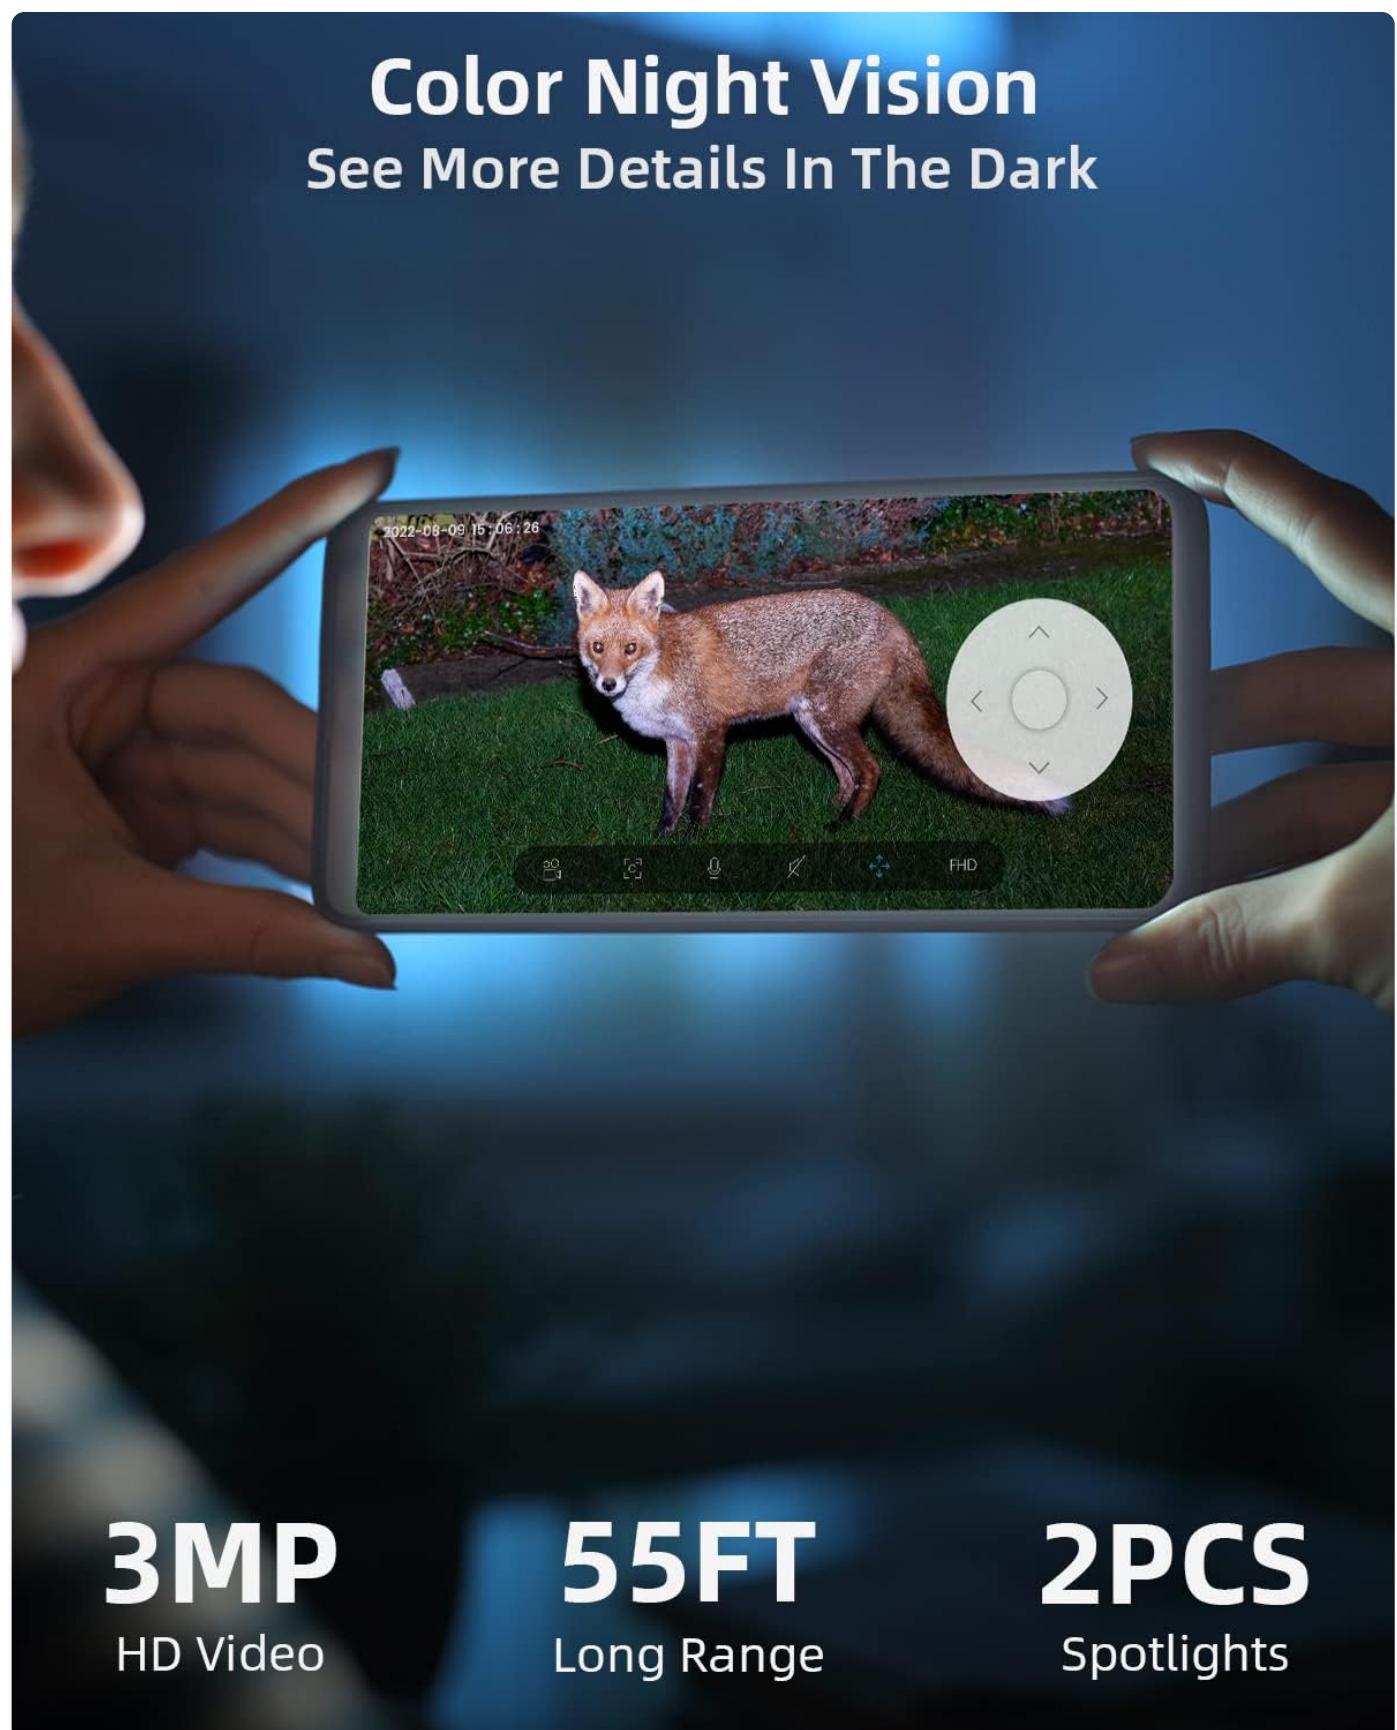


Figure 2: Color Night Vision Capability

3.2. Everlasting Power & Reliable Connectivity

Equipped with a solar panel and a high-capacity battery, this camera ensures continuous operation without the need for frequent recharging. It connects via 2.4Ghz WiFi (5Ghz WiFi is not supported) and features a dual-antenna design for a strong and stable signal, minimizing disconnections.

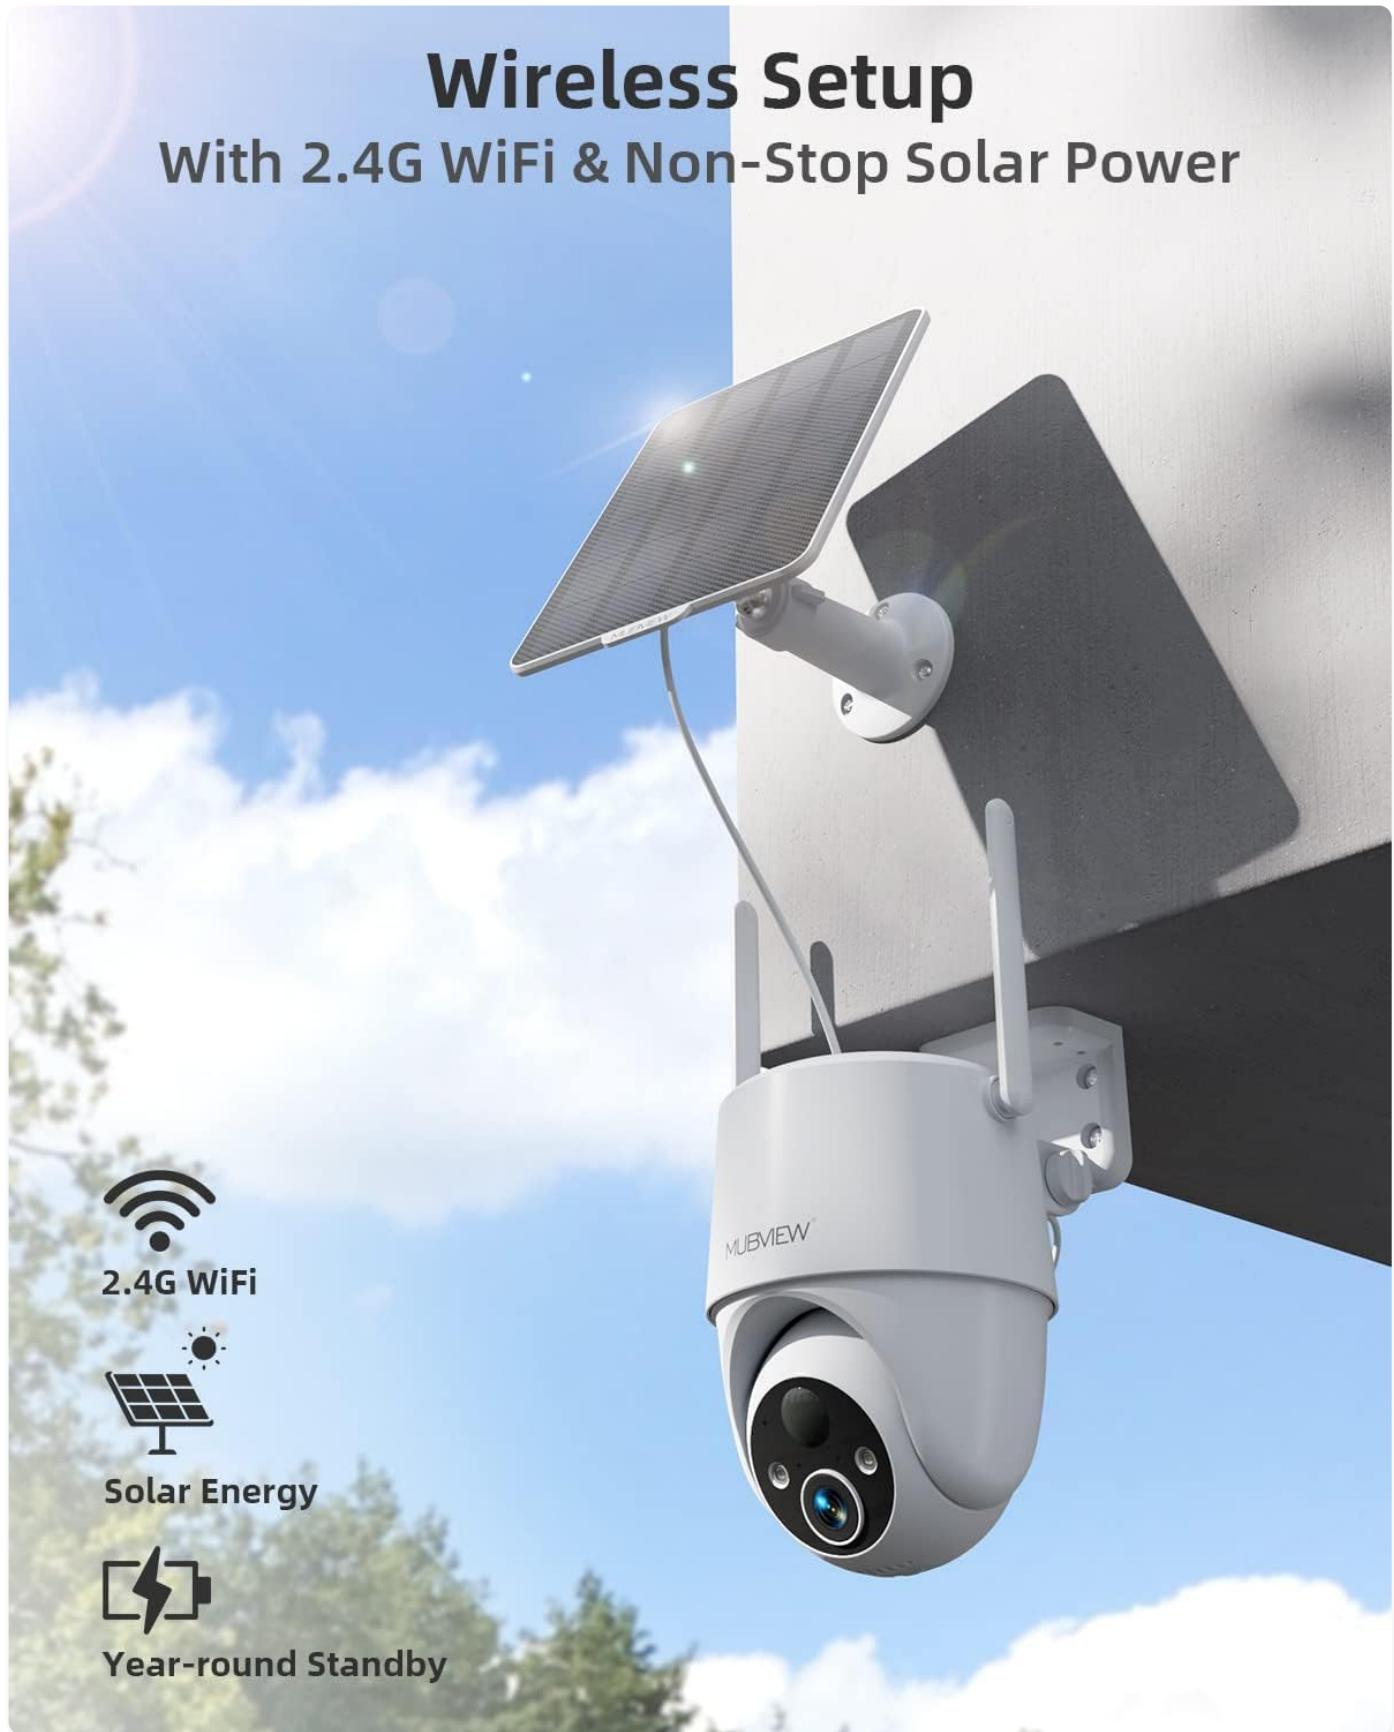


Figure 3: Wireless Setup with Solar Power

3.3. Real-time Communication & Intelligent Detection

Engage in clear two-way audio communication through the camera's built-in microphone and speaker. The upgraded motion sensor provides faster and more accurate detection, sending instant notifications to your device. Features include human detection and customizable motion areas to reduce false alerts.



Figure 4: Instant Alerts and Two-Way Audio

3.4. Flexible Storage Options

The camera supports local storage via a memory card (up to 128GB, not included) and offers permanent free 7-day looping cloud

storage. All data is protected with military-grade double encryption to safeguard your privacy.

Risk-Free Purchase

No Monthly Fees

Local Security
Up To 128G
(Not included)



lifetime free 7-day loop
Mubview Cloud

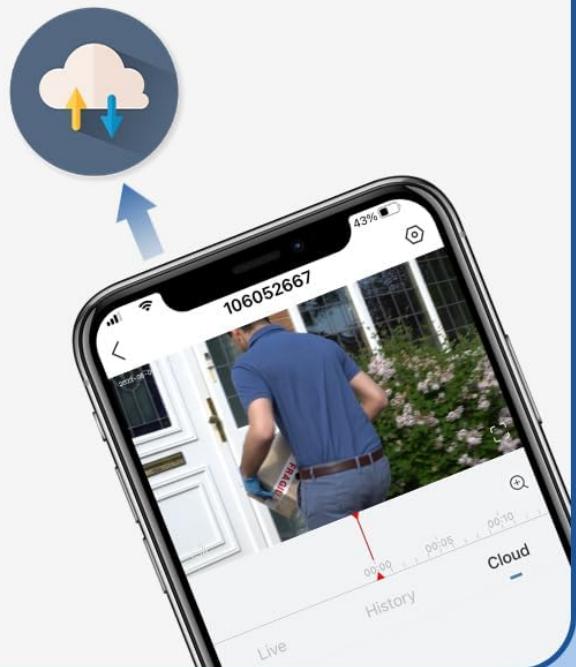


Figure 5: Local and Cloud Storage Options

3.5. All-Weather Resistant

With an IP66 weatherproof rating, the camera is designed to withstand extreme weather conditions, operating reliably in temperatures ranging from -13°F to 140°F (-25°C to 60°C).

Ready For Any Weather



Figure 6: IP66 Weather Resistance

4. SETUP AND INSTALLATION

Follow these steps to set up and install your MUBVIEW Solar Security Camera:

- 1. Charge the Camera:** Before installation, fully charge the camera's internal battery using the provided USB cable.
- 2. Download the App:** Download the "CloudEdge" app from your smartphone's app store (available for iOS and Android).

3. **Register and Add Device:** Open the CloudEdge app, register an account, and follow the in-app instructions to add your new camera. You will typically scan a QR code located on the camera to pair it with your account.
4. **Mount the Camera:** Choose a suitable outdoor location with good WiFi signal and direct sunlight exposure for the solar panel. Use the included mounting bracket, screws, and wall plugs to securely attach the camera and solar panel to a wall or other stable surface. Ensure the solar panel is positioned to receive maximum sunlight throughout the day.

For a visual guide on sharing your camera with others via the app, please refer to the video below:

Your browser does not support the video tag.

Video 1: How to share MUBVIEW GX8S camera?

This video demonstrates the process of sharing your MUBVIEW GX8S camera access with other users through the CloudEdge application.

5. OPERATING INSTRUCTIONS

Once installed and connected, you can operate your camera using the CloudEdge app:

5.1. Live View

Open the CloudEdge app and select your camera to view the live feed. You can pan and tilt the camera remotely using the controls within the app to adjust the viewing angle.

Cover Every Detail

355° Pan 120° Tilt



2K
Ultra HD

160°
Viewing Angle

4X
Digital Zoom

Figure 7: Pan and Tilt Functionality

5.2. Two-Way Audio

Tap the microphone icon in the live view to speak through the camera's speaker. This allows for real-time communication with visitors or to deter intruders.

5.3. Motion Detection and Alerts

The camera automatically detects motion and sends push notifications to your phone. You can customize motion detection

sensitivity and define specific motion zones within the app to focus on critical areas and minimize unwanted alerts.

5.4. Playback Recorded Footage

Access recorded videos from the app's playback section. You can review footage stored on the SD card or in the cloud, depending on your storage settings.

6. MAINTENANCE

To ensure the longevity and optimal performance of your MUBVIEW Solar Security Camera, consider the following maintenance tips:

- **Clean the Lens and Solar Panel:** Periodically wipe the camera lens and solar panel with a soft, damp cloth to remove dust, dirt, or debris that may obstruct the view or reduce charging efficiency.
- **Check Mounting:** Ensure the camera and solar panel remain securely mounted. Tighten any loose screws if necessary.
- **Monitor Battery Level:** While solar-powered, it's good practice to occasionally check the battery level via the app, especially during prolonged periods of cloudy weather, to ensure it's charging effectively.
- **Firmware Updates:** Keep the camera's firmware updated through the CloudEdge app to benefit from the latest features and security enhancements.

7. TROUBLESHOOTING

If you encounter issues with your MUBVIEW Solar Security Camera, try the following common troubleshooting steps:

- **No Power/Not Turning On:** Ensure the camera's battery is charged. If using solar, verify the solar panel is clean and receiving direct sunlight. Try charging directly via USB.
- **Offline/Disconnected:** Check your 2.4Ghz WiFi network. Ensure the camera is within range of your router. Restart your router and the camera. Re-pair the camera with the app if necessary.
- **Poor Video Quality:** Clean the camera lens. Ensure there are no obstructions in the camera's field of view. Check your internet connection speed.
- **Motion Detection Issues:** Adjust motion detection sensitivity in the app. Verify motion zones are correctly configured. Ensure there are no objects (e.g., tree branches) causing false alerts.
- **Two-Way Audio Problems:** Check the volume settings on your phone and in the app. Ensure there are no obstructions blocking the camera's microphone or speaker.

If problems persist, please contact MUBVIEW customer support for further assistance.

8. SPECIFICATIONS

Feature	Detail
Model Name	ZS-GX8S
Indoor/Outdoor Usage	Outdoor
Video Capture Resolution	3 MP (2K FHD)
Pan/Tilt/Zoom	355° Pan, 120° Tilt, 4x Digital Zoom
Viewing Angle	120 Degrees
Night Vision Range	55 Feet (Color Night Vision)
Power Source	Solar Powered, Battery Powered

Connectivity Protocol	Wi-Fi (2.4Ghz only)
Controller Type	CloudEdge App
Storage Options	Local (up to 128GB SD card), Cloud (7-day free looping)
Weather Resistance	IP66
Operating Temperature	-13°F to 140°F (-25°C to 60°C)
Dimensions (L x W x H)	7.09 x 6.69 x 5.12 inches
Item Weight	2.27 pounds

9. WARRANTY AND SUPPORT

MUBVIEW is committed to providing excellent customer service and product support:



- **Warranty:** The product comes with a 2-year warranty.
- **Lifetime Trade-in Program:** MUBVIEW offers a lifetime trade-in program for eligible products.
- **Customer Support:** Fast and local after-sale support is available 24/7 via phone or email to assist with any questions or issues you may have.

For support, please refer to the contact information provided with your product packaging or visit the official MUBVIEW website.

© 2023 MUBVIEW. All rights reserved.

Related Documents - ZS-GX8S

 <p>Mubview DX2 2K Floodlight Smart Security Camera: Quick Start Guide & Features</p> <p>Get started with your Mubview DX2 2K Floodlight Smart Security Camera. This guide covers setup, Wi-Fi connection, installation, app usage, motion detection, night vision, and troubleshooting for your outdoor security camera.</p>
 <p>Mubview PK320 Wi-Fi Security Camera Quick Start Guide</p> <p>A concise guide to setting up and using the Mubview PK320 Wi-Fi security camera, covering key features, installation steps, app integration, and support resources.</p>
 <p>MUBVIEW PK320 Indoor Security Camera User Manual</p> <p>User manual for the MUBVIEW PK320 Indoor Security Camera, detailing its features, specifications, installation, usage, and support.</p>

	<p>Mubview ZS-GX7S Quick Start Guide: Setup and Usage</p> <p>Comprehensive quick start guide for the Mubview ZS-GX7S camera, covering setup, app connection, installation, battery management, and troubleshooting. Learn how to connect your camera and enhance your safety.</p>
	<p>MUBVIEW PK 320 Smart PTZ Indoor Camera User Manual and Setup Guide</p> <p>Comprehensive guide for the MUBVIEW PK 320 Smart PTZ Indoor Camera, covering setup, app connection, features, troubleshooting, and regulatory information.</p>
	<p>Mubview PK 320 Smart PTZ Indoor Camera User Manual and Setup Guide</p> <p>Comprehensive guide for the Mubview PK 320 Smart PTZ Indoor Camera, covering product introduction, app installation, account registration, connection steps, multi-user sharing, troubleshooting, and regulatory compliance information.</p>