

[Manuals.plus](#) /

› [LEDIARY](#) /

› LEDIARY Caged Ceiling Fan with Lights and Remote - Instruction Manual

LEDIARY 68A3BB6BA

LEDIARY Caged Ceiling Fan with Lights and Remote

Model: 68A3BB6BA

1. IMPORTANT SAFETY INFORMATION

Please read and understand all instructions before beginning installation and operation. Failure to follow these instructions may result in electric shock, fire, or serious personal injury.

- Ensure power is disconnected at the circuit breaker before installation or servicing.
- All electrical connections must be in accordance with local codes, ordinances, and the National Electric Code (NEC).
- Consult a qualified electrician if you are unsure about wiring or installation procedures.
- Do not operate the fan with damaged wiring or if the motor is making unusual noises.
- Keep hands, hair, and clothing clear of the fan blades during operation.

2. PACKAGE CONTENTS

Verify that all components are present and undamaged before proceeding with installation.

- Caged Ceiling Fan Unit (with integrated motor and blades)
- Remote Control
- Mounting Hardware (screws, wire nuts, mounting bracket)
- Instruction Manual

3. INSTALLATION GUIDE

The LEDIARY Caged Ceiling Fan is designed for easy flush mount installation. Ensure you have the necessary tools (screwdriver, wire strippers, ladder) before starting.

3.1 Mounting the Fan

Attach the mounting bracket securely to a ceiling joist or a suitable electrical junction box capable of supporting the fan's weight (8.98 pounds).



Image: Internal view of the fan showing the mounting plate for secure ceiling attachment.

3.2 Electrical Connections


Connect the fan's electrical wires to your household wiring according to the provided wiring diagram in the manual. Use appropriate wire nuts to secure connections. This fan operates on 120 Volts (AC).

3.3 Attaching the Fan Body

Once wiring is complete, carefully lift the fan body and secure it to the mounting bracket using the provided screws. Ensure all connections are tucked safely within the junction box.



Dimension

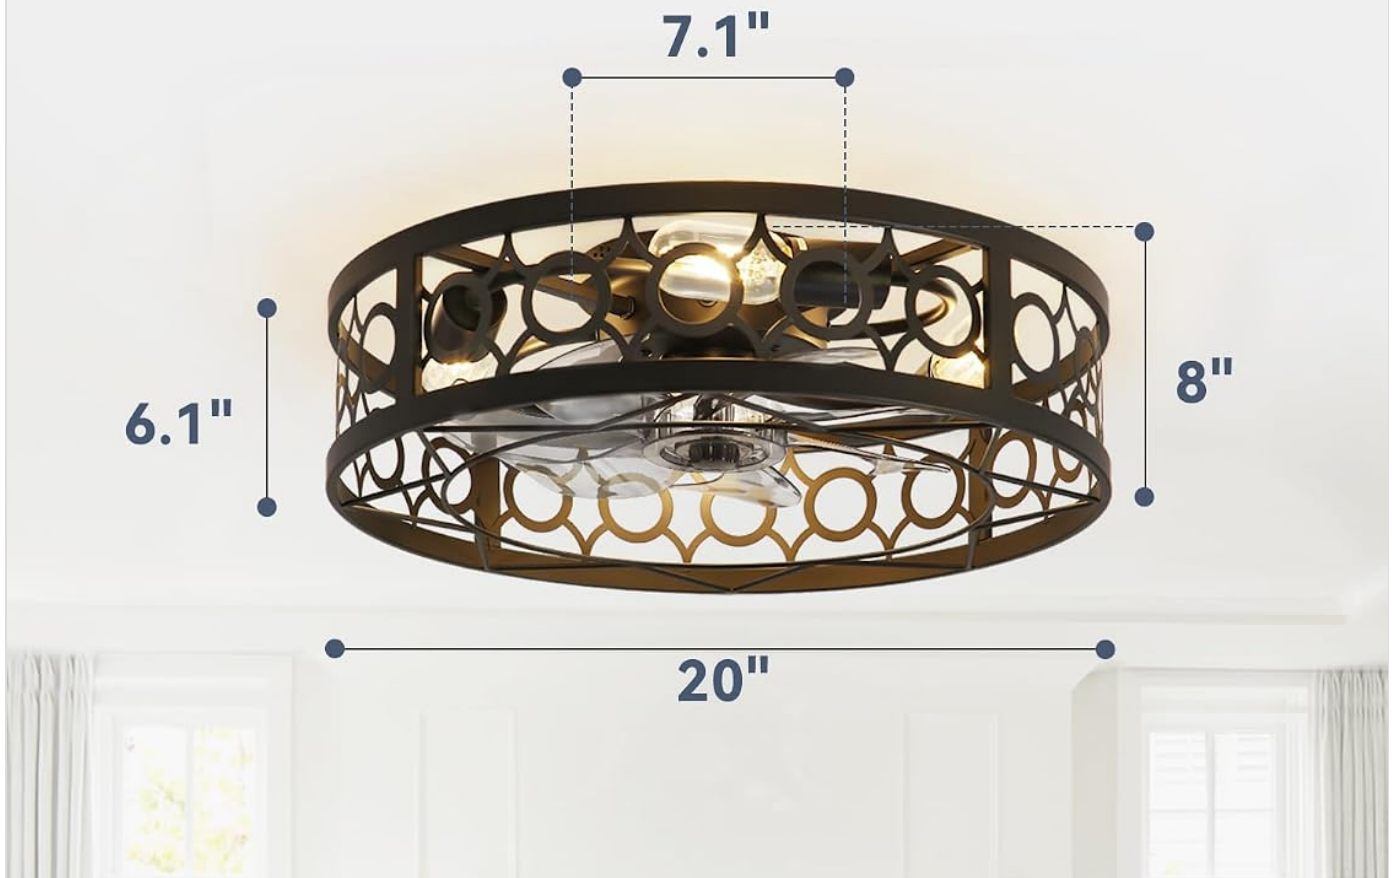

Fan Blade



Lamp Holder



Lamp Body

Image: Detailed dimensions of the 20-inch fan and close-ups of its components, including the lamp holder and fan blades.

3.4 Installing Light Bulbs

This fan requires 4 E26 base bulbs. Compatible bulb types include ST21, A19, ST19, T45 incandescent bulbs (up to 60W), and LED bulbs (up to 10W). Bulbs are not included.



20" Caged Ceiling Fan

Light up your daily life



E26*4 Bulb Base

Incandescent Bulb:
Max 60W
LED Bulb:Max 10W
(**Bulb not included**)



730
DAYS

WARRANTY

Image: Information on compatible bulb types (E26 base, max 60W incandescent, max 10W LED) and the 730-day warranty.

4. OPERATING INSTRUCTIONS

The fan is controlled via the included remote control, offering comprehensive functionality.

4.1 Remote Control Functions

The remote allows for light control, 6-speed fan settings, sleep mode, forward and reverse modes, and a timer function. It also features an optional mute for button presses.

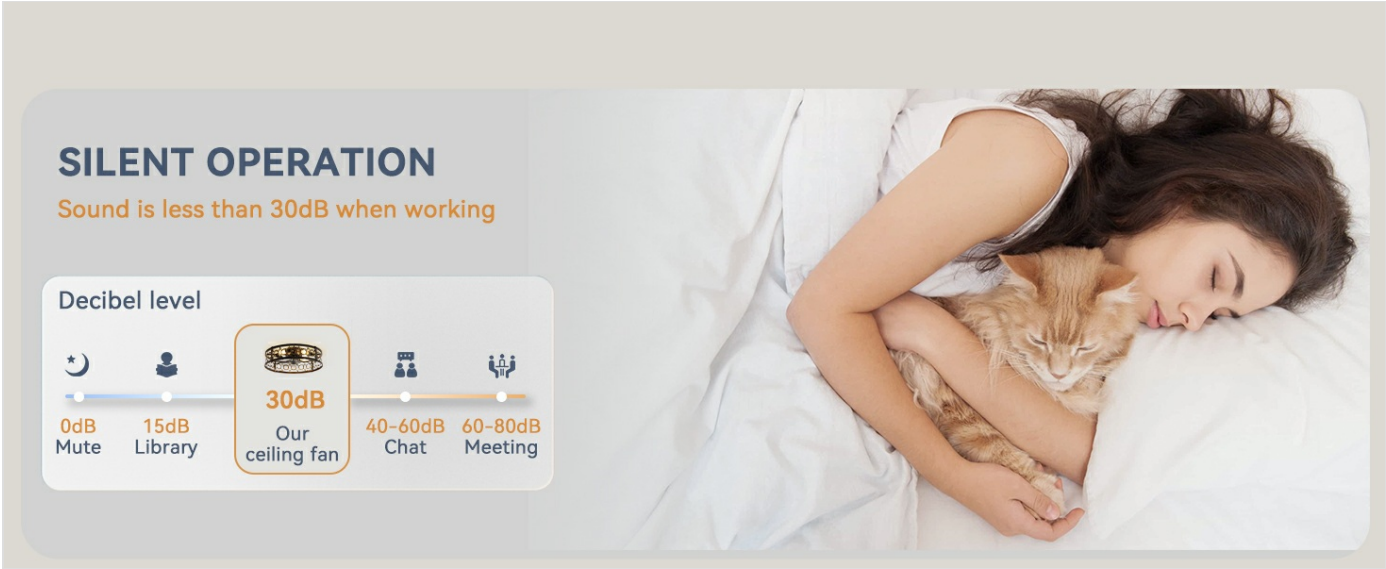


Image: Overview of the remote control's functions, including light, fan speed, direction, and timer settings.

4.2 Fan Speed Settings

Choose from 6 fan speeds to suit your comfort level. Speeds 1-2 are for low wind, 3-4 for medium wind, and 5-6 for high wind.

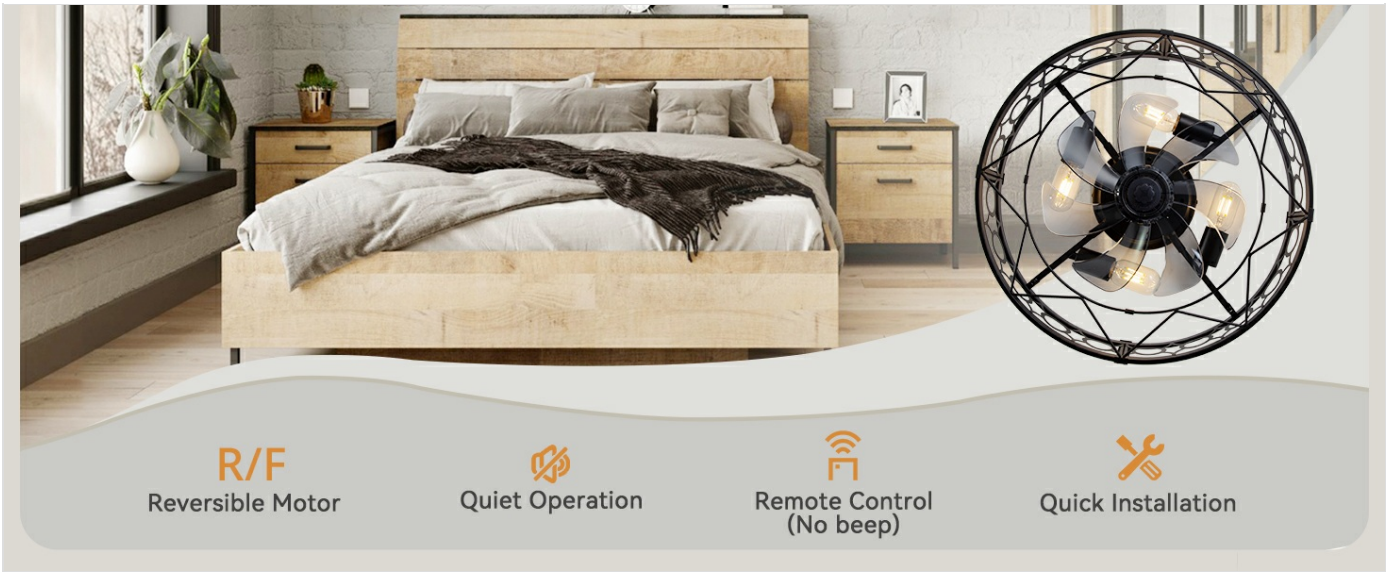


Image: Visual representation of fan speed settings and their recommended uses.

4.3 Summer and Winter Modes

The fan features a reversible motor for year-round comfort. In summer, the fan rotates clockwise to create a downdraft for cooling. In winter, it reverses direction to circulate warm air and balance room temperature.

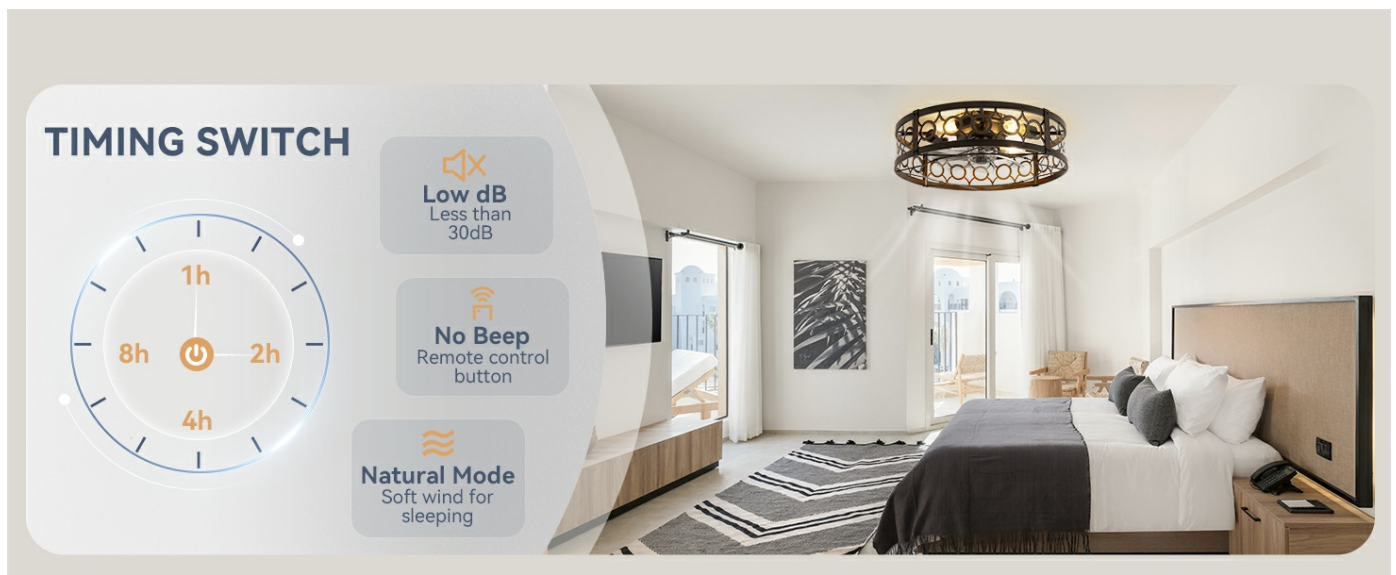


Image: Explanation of summer and winter modes for optimal air circulation.

4.4 Quiet Operation

The fan's high-quality motor operates quietly, with sound levels less than 30dB, ensuring a peaceful environment.



Quiet Operation Ceiling Fan

Enjoy sleeping time



0dB
Mute



15dB
Library



30dB
Our ceiling fan



40-60dB
Chat



60-80dB
Meeting



Image: Decibel comparison chart highlighting the fan's quiet operation at 30dB.

4.5 Official Product Videos

Watch these official videos from the seller for additional guidance on the fan's features and operation.

Your browser does not support the video tag.

Video: A brief overview of the 16-inch Caged Ceiling Fan with Light and Remote, showcasing its design and functionality.

Your browser does not support the video tag.

Video: A short demonstration of the LEDIARY Caged Ceiling Fan with Light, highlighting its aesthetic and operational aspects.

5. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning:** Dust the fan and light fixture regularly with a soft, dry cloth. For deeper cleaning, wipe with a damp cloth and mild detergent, then dry thoroughly. Do not use abrasive cleaners.
- **Bulb Replacement:** Ensure power is off before replacing light bulbs. Allow bulbs to cool before handling.
- **Tightening Screws:** Periodically check and tighten all screws on the fan and mounting bracket to ensure secure operation.

6. TROUBLESHOOTING

If you experience issues with your fan, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Fan does not operate	No power supply	Check circuit breaker and wall switch. Ensure all wiring connections are secure.
Light does not turn on	Bulb is faulty or loose	Replace bulb or tighten it. Check wiring to the light fixture.
Remote control not working	Batteries are dead or incorrectly inserted	Replace batteries (Zinc Carbon, included). Ensure correct polarity.
Excessive noise during operation	Loose screws or mounting	Check and tighten all mounting screws and fan body screws.

7. PRODUCT SPECIFICATIONS

Feature	Specification
Brand	LEDIARY
Model Number	68A3BB6BA
Color	Black
Design	Caged Ceiling Fan
Power Source	DC
Style	Farmhouse
Product Dimensions	20"D x 20"W x 8.5"H
Item Weight	8.98 pounds
Room Type Recommendation	Bedroom, Living Room, Outdoor, Home Office, Dining Room
Special Features	Remote Controlled, Bladeless

Feature	Specification
Recommended Uses	Indoor, Outdoor
Max Incandescent Wattage	60 watts (E26 base)
Max LED Wattage	10 watts (E26 base)
Finish Type	Brushed
Number of Blades	7
Fan Speed	1080 RPM (Max)
Voltage	120 Volts (AC)
Control Method	Remote
Number of Power Levels	6
Installation Method	Flush Mount
Batteries Included	Yes
Battery Cell Type	Zinc Carbon

8. WARRANTY AND SUPPORT

LEDIARY stands behind the quality of its products. All components (except the motor) are covered by a 2-year after-sales service.

Our dedicated customer service team is committed to responding to and resolving any issues within 24 hours. For support, please refer to the contact information provided in your product packaging or visit the official LEDIARY store online.

For more information and to explore other products, visit the [LEDIARY Store](#).

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0D9JG2R98>

More documents and user manuals: <https://manuals.plus/>