

[Manuals.plus](#) /

› [Doltono](#) /

› Doltono Queen Bed Frame with Storage Drawers, LED Light, and Charging Station Instruction Manual (Model C-227Q)

Doltono C-227Q

Doltono Queen Bed Frame Instruction Manual

Model: C-227Q

INTRODUCTION

This manual provides comprehensive instructions for the assembly, operation, and maintenance of your Doltono Queen Bed Frame with Storage Drawers, LED Light, and Charging Station. Please read all instructions carefully before beginning assembly and retain this manual for future reference.



Image: The Dolto Queen Bed Frame, showcasing its LED-lit headboard, integrated charging station, and two under-bed storage drawers.

IMPORTANT SAFETY INFORMATION

WARNING:

- Do not exceed the weight limit of 800 pounds.
- Always follow the assembly instructions carefully to prevent instability or collapse.
- Ensure all connections are secure before use.
- Keep small parts away from children during assembly.

PACKAGE CONTENTS

Verify that all components are present before beginning assembly. All accessories are shipped in one package.



- Headboard (with integrated LED lights and charging station)

- Metal Bed Frame components
- Steel Slats
- 2 Storage Drawers
- Installation Tools & Accessories (e.g., Allen wrench)
- Installation Manual (this document)

QUEEN

L * W * H : 87.7 * 62.8 * 41.7 IN

Weight Capacity: 800 LBS
Recommend Mattress: 10-14 IN

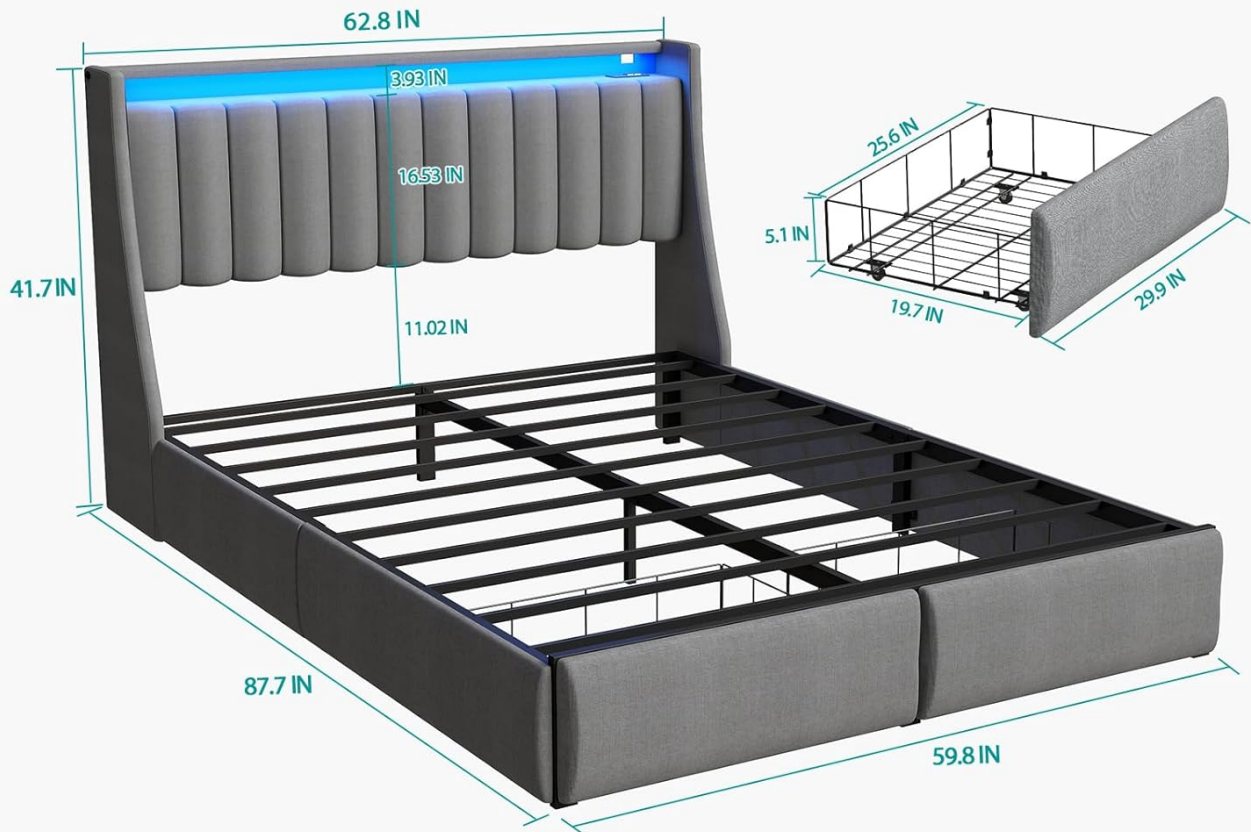

No Box Spring
Needed



One
Package



No
Squeaks

Image: An exploded view diagram illustrating the main components and overall dimensions of the Queen bed frame.

ASSEMBLY INSTRUCTIONS

Assembly is estimated to take approximately 30 minutes. Some accessories are pre-assembled for convenience. It is recommended to have two people for assembly.

1. **Unpack Components:** Carefully remove all parts from the packaging. Lay them out on a clean, soft surface to prevent scratches.
2. **Assemble Frame:** Follow the step-by-step diagrams provided in the included installation manual. Ensure all bolts are tightened securely. Note that some holes may require a drill for easier alignment, as mentioned by some users.

3. **Install Steel Slats:** Place the steel slats onto the frame. The mute sponge strip should be positioned to prevent squeaks by cushioning contact between metal parts.
4. **Attach Headboard:** Secure the headboard to the main frame.
5. **Assemble Drawers:** Construct the two storage drawers. Each drawer is equipped with wheels for smooth operation and a fixture mechanism to prevent accidental sliding out.

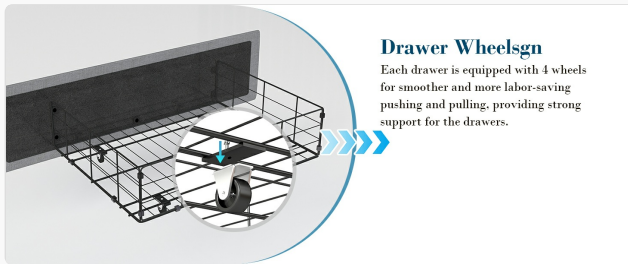


Image: Visual guide to the bed frame's stable structure, highlighting easy assembly slots, rounded corners, EVA mute sponge for noise reduction, and bed leg plugs for floor protection.

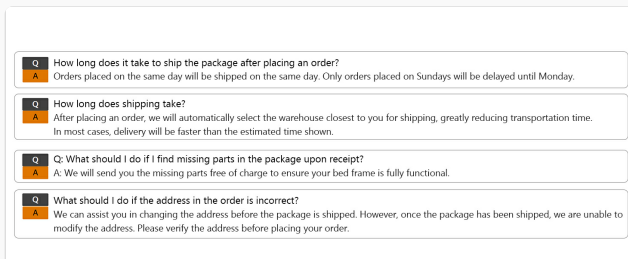


Image: Illustration of the drawer fixture design, showing how a screw aligns with a hole to prevent the drawer from sliding out unintentionally.

OPERATING INSTRUCTIONS

LED Lighting System

The integrated RGB LED strips offer customizable lighting for your bedroom. Use the provided remote control to adjust settings.

- **Brightness Adjustment:** Control the intensity of the light.
- **Color Selection:** Choose from 12 vibrant colors.
- **Mode Adjustment:** Select various dynamic lighting modes.
- **Timing Function:** Set a timer for the lights to turn off automatically.
- **DIY Mode:** Create and save your own custom lighting effects.



Image: The bed frame with its headboard illuminated by RGB LED strip lights, accompanied by an image of the remote control for various light settings.

Multi-Function Charging Station

The headboard features a convenient charging station to power your devices.

- **Power Outlets:** 2 standard electrical outlets (120V/7.5A).
- **USB Ports:** 2 USB ports (5V/2A) for charging phones and tablets.
- **Type-C Port:** 1 Type-C port (5V/2A).
- The charging station is powered via a 6.5-foot power cord.

Storage Headboard with Charging Station



Charging Station



5V/2A 1 Type-C



5V/2A 1 USB



2*AC Outlets
120V/7.5A



6.5-Foot



Image: A detailed view of the multi-function charging station integrated into the headboard, showing the electrical outlets, USB ports, and Type-C port.

Storage Drawers

The two large-capacity sliding drawers provide additional storage space.

- Each drawer is equipped with wheels for smooth movement.
- A built-in fixture prevents the drawers from sliding out unintentionally.

Multi-Port Charging Station




Image: The bed frame with its two spacious storage drawers extended, demonstrating their capacity for storing various items.

MAINTENANCE AND CARE

- **Fabric Care:** The upholstered parts of the bed frame should be hand washed only. For spot cleaning, use a mild detergent and a damp cloth. Avoid harsh chemicals.
- **Frame Cleaning:** Wipe metal and other non-fabric surfaces with a soft, dry cloth.
- **Regular Checks:** Periodically check all bolts and connections to ensure they remain tight and secure.
- **Noise Prevention:** The integrated mute sponge strip helps prevent squeaks. If any noise occurs, re-check connections and ensure the sponge is properly seated.



Image: A close-up view of the soft linen fabric used for the bed frame, highlighting its texture and properties such as good air permeability, ease of cleaning, and skin-friendliness.


TROUBLESHOOTING

Problem	Possible Cause	Solution
Bed frame is wobbly or unstable.	Loose bolts or incorrect assembly.	Ensure all bolts are tightened securely. Review assembly steps to confirm correct installation.
Squeaking noises.	Metal parts rubbing, loose connections, or missing mute sponge.	Check all connections and tighten if necessary. Verify that the mute sponge strip is correctly installed between metal components.
LED lights not working.	Power connection issue, remote control battery, or LED strip damage.	Ensure the power cord for the headboard is securely plugged into a working outlet. Check the remote control battery. If issues persist, contact customer support.
Charging station not functioning.	Power connection issue.	Verify the bed frame's power cord is plugged into a live electrical outlet. Test with different devices.

Problem	Possible Cause	Solution
Missing parts upon delivery.	Packaging error.	Contact Doltoro customer service immediately with your order details. Missing parts will be sent free of charge.
Screw holes do not align during assembly.	Minor manufacturing variance or incorrect part orientation.	Double-check that parts are oriented correctly according to the manual. Sometimes slight pressure or a drill can assist with minor misalignments. If significant, contact customer support.

SPECIFICATIONS

Model Number	C-227Q
Size	Queen
Product Dimensions (L x W x H)	88"L x 60"W x 42"H
Weight Capacity	800 pounds
Recommended Mattress Thickness	10" - 14"
Materials	Metal, Wood, Linen
Color	Modern Gray
Finish Type	Powder Coated (metal parts)
Assembly Required	Yes (Approx. 30 minutes)
Box Spring Needed	No
Charging Station Output	2 AC Outlets (120V/7.5A), 2 USB Ports (5V/2A), 1 Type-C Port (5V/2A)

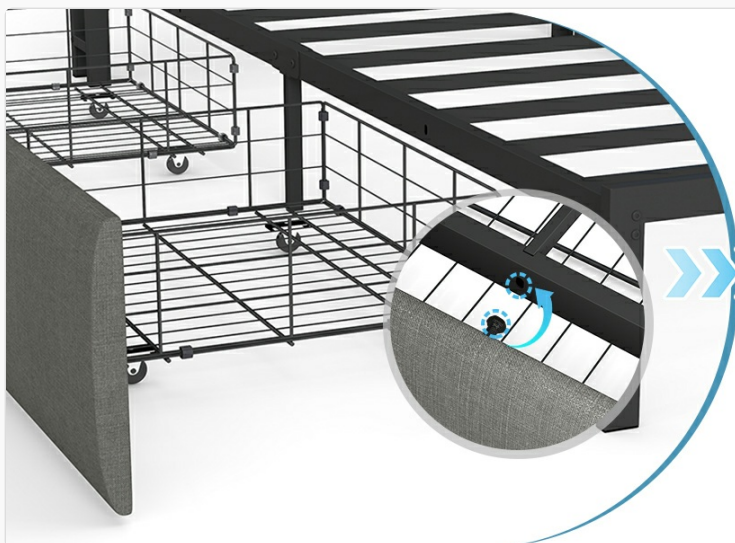

Drawers Fixtures Design

Each drawer has a screw aligned with the hole to prevent it from sliding out.

Image: A detailed table outlining the product specifications, including dimensions, weight capacity, and material information.

WARRANTY AND CUSTOMER SUPPORT

Doltoro is committed to customer satisfaction. While a specific warranty period is not detailed, we offer professional customer service.

If you have any questions, encounter problems such as missing parts, damaged components, or require assistance with assembly, please contact Doltoro customer service. You can expect a prompt reply within 24 hours.

For support, please refer to the contact information provided with your purchase or visit the official Doltoro store online.

Doltoro 24h Professional Service