



Manuals.plus /

- › Ganeed /
- › Ganeed Frozen Crystal Branch 5-Light Ceiling Chandelier (Model 1004-5C) Instruction Manual

## Ganeed 1004-5C

# Ganeed Frozen Crystal Branch 5-Light Ceiling Chandelier

Model: 1004-5C

## 1. INTRODUCTION

---

Thank you for choosing the Ganeed Frozen Crystal Branch 5-Light Ceiling Chandelier. This modern fixture features a chrome finish frame adorned with K9 crystals, designed to enhance the ambiance of various indoor spaces. This manual provides essential information for safe installation, operation, and maintenance of your new chandelier.



Image 1: Ganeed Frozen Crystal Branch 5-Light Ceiling Chandelier in a living room setting.

## 2. SAFETY INFORMATION

---

Please read and understand all instructions before beginning installation. Failure to do so may result in electric shock, fire, or other injuries that could be fatal or cause serious damage.

- Always turn off the power at the main circuit breaker before installing or servicing the fixture.
- Consult a qualified electrician if you are unsure about the installation process.
- Use only E12 base bulbs, with a maximum wattage of 25W per bulb. Do not exceed the recommended wattage.
- Handle crystal components with care to prevent breakage or injury.
- Ensure all electrical connections are secure and comply with local electrical codes.
- This fixture is designed for indoor use only.

## 3. PACKAGE CONTENTS

---

Verify that all components are present and undamaged before proceeding with installation.

- Chandelier Frame (with lamp holders and wiring)
- Crystal Branches
- Mounting Hardware (crossbar, screws, wire nuts)
- Instruction Manual



Image 2: Detailed view of chandelier components including the anti-rust metal ceiling cup, K9 crystals, stainless steel lamp body, and E12 bulb sockets.

## 4. SPECIFICATIONS

---

<b>Feature</b>	<b>Specification</b>
Brand	Ganeed
Model Number	1004-5C
Color	Chrome/5-light
Material	Crystal + Iron
Style	Modern & Vintage & Luxury
Light Fixture Form	Close to Ceiling
Product Dimensions	30.7" (Dia) x 11.8" (H) inches
Ceiling Cap Diameter	6.3 inches
Bulb Base	E12
Number of Light Sources	5
Max Wattage per Bulb	25W
Power Source	Corded Electric
Installation Type	Flush Mount
Special Feature	Anti-Rust, Fully dimmable (with compatible dimmer switch and bulbs, not included)
Item Weight	10.69 pounds

## Variety Color Temperature Effect



3000K Warm White

4000K Natural White

6000K Daylight White

Color temperature adjustment

3000K

4000K

6000K

This ceiling light is dimmable when used with compatible wall dimmer and dimmable light bulbs. (Note: Dimmer switch and bulbs are not included.)

Image 3: Product dimensions and bulb specifications.

## 5. SETUP AND INSTALLATION

Assembly and installation are required. It is recommended to have two people for installation due to the weight and complexity of attaching components. Refer to the detailed video below for visual guidance.

### 5.1. Pre-Installation Steps

1. **Turn off Power:** Before starting, ensure the power to the circuit is turned off at the main breaker.
2. **Unpack and Inspect:** Carefully unpack all components and inspect for any damage or missing parts.
3. **Prepare Tools:** Gather necessary tools (screwdriver, wire strippers, wrench, ladder, safety glasses).

### 5.2. Assembly and Wiring

1. **Assemble Branches:** Attach the crystal branches to the main lamp body. Ensure they are securely fastened.
2. **Connect Internal Wiring:** Connect all white (or blue) wires from the lamp holders to the main white (or blue) wire. Connect all black (or brown) wires from the lamp holders to the main black (or brown) wire. Use wire nuts to secure connections.
3. **Mount Crossbar:** Secure the mounting crossbar to your ceiling junction box using the provided screws.
4. **Connect Main Wires:** Connect the main black (or brown) wire from the fixture to the fire wire (L) from the ceiling. Connect the main white (or blue) wire from the fixture to the neutral wire (N) from the ceiling. Connect the ground wire

from the fixture to the ground wire from the ceiling.

5. **Secure Fixture:** Carefully lift the fixture and attach it to the mounting crossbar, securing it with the decorative nuts.
6. **Install Bulbs:** Screw in 5 E12 base bulbs (not included) into the lamp holders.
7. **Attach Crystals:** Hang the individual crystal strings and the main crystal ball to the designated points on the fixture.

### 5.3. Installation Video

For a visual guide on the assembly and installation process, please watch the official Ganeed installation video:

Video 1: Easy Installation of Ganeed Crystal Chandeliers. This video demonstrates the step-by-step assembly and wiring process for the chandelier.

## 6. OPERATING INSTRUCTIONS

---

Once installed, operate your chandelier using a standard wall switch. This fixture is fully dimmable when used with compatible dimmer switches and dimmable E12 bulbs (not included).

### 6.1. Turning On/Off

Use your wall switch to turn the chandelier on or off.

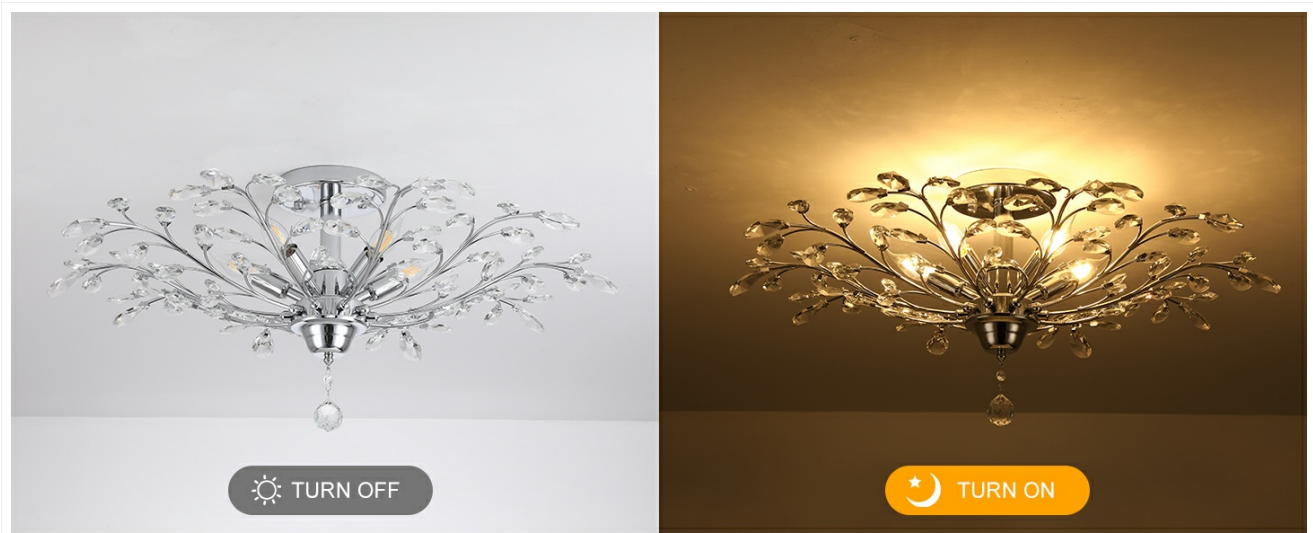


Image 4: Chandelier in 'Turn Off' and 'Turn On' states.

### 6.2. Dimming Functionality

To utilize the dimming feature, ensure you have installed dimmable E12 bulbs and a compatible dimmer switch (both sold separately). Adjust the dimmer switch to achieve your desired light intensity.



Image 5: Chandelier demonstrating various color temperature effects (3000K, 4000K, 6000K) when used with dimmable bulbs.

## 7. MAINTENANCE

Regular maintenance will help preserve the appearance and functionality of your chandelier.

- **Cleaning:** Turn off the power before cleaning. Use a soft, dry, or slightly damp cloth to wipe the metal frame. For crystals, use a soft, lint-free cloth and a mild glass cleaner. Avoid abrasive cleaners or solvents that may damage the finish or crystals.
- **Bulb Replacement:** Ensure the power is off and bulbs have cooled before replacing. Unscrew old bulbs and screw in new E12 bulbs (max 25W).
- **Connection Check:** Periodically check all electrical connections and mounting hardware to ensure they remain secure.

## 8. TROUBLESHOOTING

If you encounter issues with your chandelier, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on	No power, loose wiring, faulty bulb	Check circuit breaker. Ensure all wires are securely connected. Replace bulbs.
Lights flicker	Loose bulb, incompatible dimmer, faulty wiring	Tighten bulbs. Ensure dimmer and bulbs are compatible. Check wiring connections.
Crystals appear dull	Dust or residue buildup	Clean crystals with a soft, lint-free cloth and mild glass cleaner.

## 9. WARRANTY AND SUPPORT

Ganeed provides a 1-year limited warranty for your purchase, covering any broken or missing parts. For warranty claims, technical assistance, or any product-related inquiries, please contact the seller directly.

**Seller:** Ganeed Lighting Store

Please retain your proof of purchase for warranty purposes.

