

Mpayel A8505-52inch

Mpayel 52 Inch Flush Mount Ceiling Fan with Light and Remote

INSTRUCTION MANUAL

1. Introduction

Thank you for choosing the Mpayel 52 Inch Flush Mount Ceiling Fan with Light and Remote. This manual provides essential information for the safe installation, operation, and maintenance of your new ceiling fan. Please read these instructions thoroughly before installation and retain them for future reference.

This ceiling fan features a quiet DC motor, dimmable LED lighting with adjustable color temperature, 6 fan speeds, a reversible function for year-round use, and convenient remote control operation. Its low-profile design is suitable for various indoor and outdoor covered spaces.

2. Safety Information

- Always disconnect power at the main circuit breaker before installation or servicing.
- All electrical connections must be in accordance with local codes, ordinances, and the National Electric Code. If you are unfamiliar with electrical wiring, consult a qualified electrician.
- Ensure the installation site can support the fan's weight (approximately 11.75 pounds).
- Do not bend the blade holders during installation or cleaning.
- Keep children away from the fan while it is operating.
- Do not insert objects into the path of the fan blades.

3. Package Contents

Verify that all components are present before beginning installation:

- Ceiling Fan Motor Assembly
- Fan Blades (5 pieces)
- LED Light Kit
- Remote Control
- Remote Control Holder
- Mounting Bracket
- Hardware Pack (screws, wire nuts, etc.)
- Instruction Manual

4. Product Features

- **Quiet DC Motor:** Operates silently for a peaceful environment.
- **Dimmable LED Light:** Integrated LED light kit (18W, 2500 lumens) with 20%-100% smooth dimming.
- **3-Color Temperature Selection:** Easily switch between Warm Light (3000K), Natural Light (4500K), and Cold White Light (6000K).
- **6 Fan Speeds:** Adjustable airflow from gentle breeze (speeds 1-2) to strong wind (speeds 5-6).
- **Reversible Function:** Change blade direction for summer (downward airflow) or winter (upward airflow to circulate warm air).
- **Remote Control:** Full control over fan speed, light settings, and timer.
- **2-Hour Timer:** Convenient automatic shut-off function.
- **Low Profile Design:** Flush mount installation, ideal for rooms with lower ceilings.
- **Durable Construction:** Crafted with acrylic, metal, and composite wood blades for long-lasting performance.

5. Setup and Installation

Installation should be performed by a qualified electrician or a person with sufficient electrical knowledge to ensure safety and proper function. Refer to the included instruction manual for detailed wiring diagrams and mounting steps.

5.1 Pre-Installation Checklist

- Ensure power is OFF at the circuit breaker.
- Confirm all package contents are present.
- Gather necessary tools (screwdriver, wire strippers, ladder, etc.).

5.2 Mounting the Fan

1. Secure the mounting bracket to the ceiling outlet box. Ensure the outlet box is securely fastened to the building structure and can support the fan's weight.
2. Connect the electrical wires according to the wiring diagram in the detailed manual.

3. Attach the fan motor assembly to the mounting bracket.
4. Install the fan blades. The blades are reversible, offering black or wood-grain finish options.
5. Install the LED light kit and acrylic lampshade.

The fan is designed for flush mount installation, providing a sleek, low-profile look.



Angle



Flush

PRODUCT SPECIFICATION



Brand:	Mpayel	Material :	Metall+Verbundholz
Voltage :	90-265V	Finish :	Baking paint
LED Light Power :	18W	F/R:	Foward/Reverse
Timer Setting :	2 hours	Speeds :	1-6 Wind Speeds

Image: Product Specification Diagram showing fan dimensions (52 inch diameter, 12 inch height) and flush mount installation.

6. Operating Instructions

6.1 Remote Control Functions

The included remote control allows full functionality of your ceiling fan. Ensure 2 AAA batteries (included) are installed correctly.

3 TYPES OF CONTROL

- Remote Control
- APP Control
- Wall Control



(NOT included)



Brightness & Color Temperatures Adjust



Reversible Function



Quick-switch of Color Temperatures




Night Mode



2H Timing



Natural Wind



6 Wind Speed

★ The fan and light can be controlled separately

Image: Diagram illustrating the remote control with buttons for fan speed, light brightness, color temperature, timer, and reversible function.

- **ON/OFF (Light):** Turns the light on or off.
- **ALL OFF:** Turns both the fan and light off simultaneously.
- **Brightness +/-:** Adjusts the light brightness (20%-100%).
- **Color Temperature (K button):** Cycles through Warm Light (3000K), Natural Light (4500K), and Cold White Light (6000K).
- **Fan Speed (1-6):** Selects one of six fan speeds. 1 is the lowest, 6 is the highest.
- **F/R (Forward/Reverse):** Changes the direction of the fan blades for seasonal use.
- **2H (Timer):** Activates a 2-hour timer for automatic fan and light shut-off.
- **Night Mode (Moon icon):** Dims the light to a low setting for nighttime use.

6.2 Reversible Function (Summer/Winter)

The fan's reversible motor allows for optimal comfort year-round:

- **Summer Mode (Downward Airflow):** Press the F/R button on the remote. The blades will rotate counter-clockwise,

pushing cool air down.

- **Winter Mode (Upward Airflow):** Press the F/R button again. The blades will rotate clockwise, drawing cool air up and circulating warm air trapped near the ceiling.

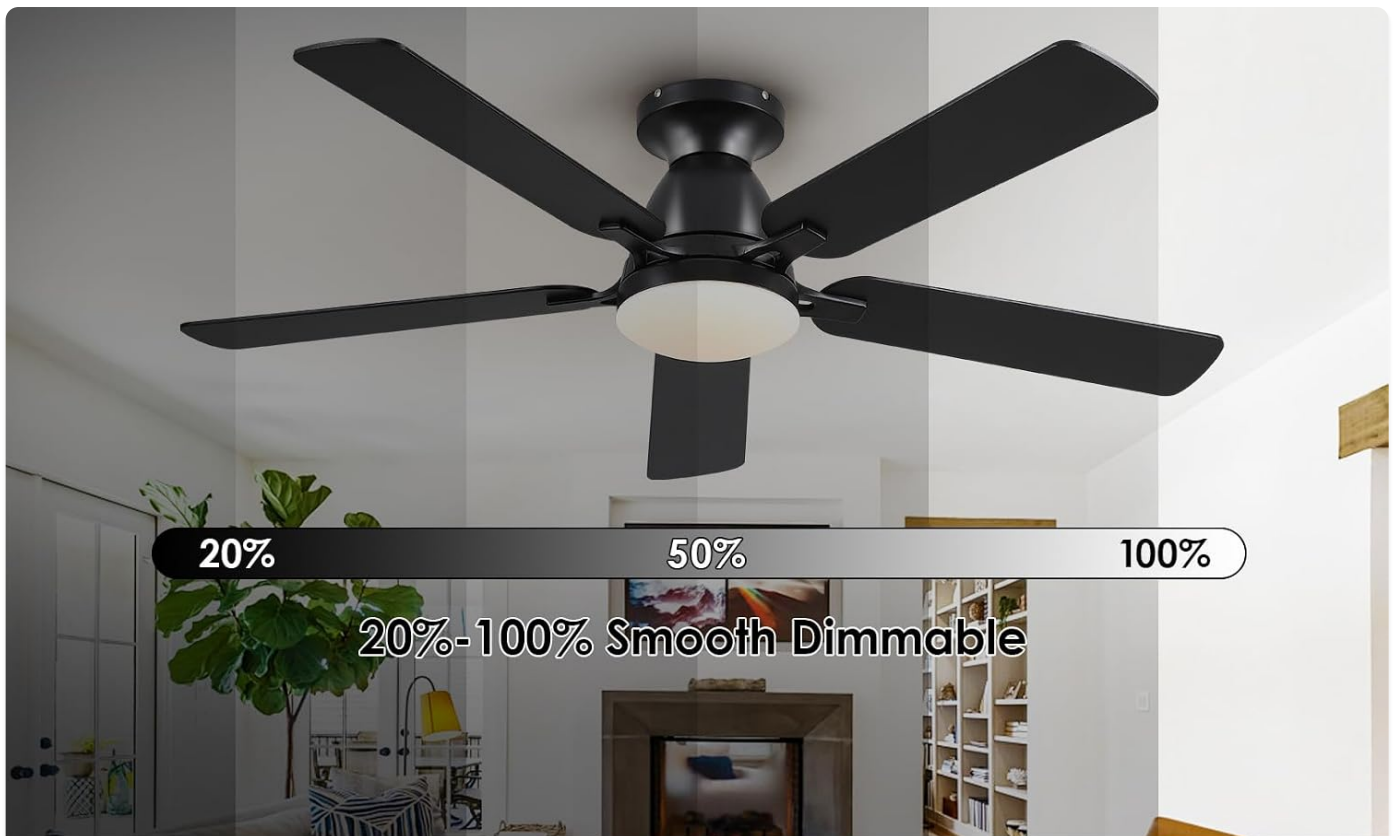


Image: Illustration showing downward airflow for summer mode and upward airflow for winter mode, demonstrating the reversible function.

6.3 Light Control

Adjust the light to suit your preference:

- Use the Brightness +/- buttons to dim or brighten the light.
- Press the 'K' button to cycle through Warm Light (3000K), Natural Light (4500K), and Cold White Light (6000K).



3-COLOR TEMPERATURE SELECTION



Warm Light
(3000K)



Natural Light
(4500K)



Cold White Light
(6000K)



Image: Visual representation of the 3-color temperature selection (Warm, Natural, Cold White) and 20%-100% smooth dimmable light feature.

7. App Control

For additional control, you can use the 'Fan Lamp Pro' app on your smartphone. This app connects via Bluetooth.

1. Scan the QR code below or visit jasonghost.com/fanlamppro to download the 'Fan Lamp Pro' app.
2. Open the app and select your preferred language.
3. Turn off the main power to the fan and ensure Bluetooth is enabled on your phone.
4. Turn on the main power to the fan and immediately click the 'Connect' button in the app.
5. The fan light will blink twice to indicate a successful connection.

Details Determine The Quality

52 Low Profile Ceiling Fan with Light



Lampshade

- Acrylic Material
- Soft Light Transmission



Composite wood

- Composite wood fan blade
- Not easily deformed, lightweight and durable



LED Integrated Light kit

- 24W
- Adjust brightness(10%-100%)
- Warm White/ Natural White, Cool White



Image: Instructions for downloading and connecting to the 'Fan Lamp Pro' app via QR code, showing app interface for fan and light control.

8. Maintenance

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning:** Periodically clean the fan blades and motor housing with a soft, damp cloth. Do not use abrasive cleaners or solvents.
- **Blade Inspection:** Check the blade attachments periodically to ensure they are secure.
- **Light Source:** The LED light kit is integrated and not user-replaceable. If the light fails, contact customer support.

9. Troubleshooting

If you experience issues with your fan, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Fan does not start	No power to the fan; Loose wire connections; Remote control battery low.	Check circuit breaker; Ensure all connections are secure; Replace remote control batteries.
Light does not work	Loose wire connection to light kit; LED light kit failure.	Check light kit wiring; Contact customer support for replacement if LED is faulty.
Remote control not pairing/working	Incorrect pairing procedure; Interference; Faulty remote.	Ensure fan power is cycled before pairing; Follow app pairing instructions carefully; Try new batteries; Contact customer support if remote is faulty.
Fan wobbles	Loose blades; Improper mounting; Unbalanced blades.	Tighten all blade screws; Ensure mounting bracket is secure; Use balancing kit (not included) if necessary.

Problem	Possible Cause	Solution
Noisy operation	Loose screws; Fan not level; Obstruction.	Check and tighten all screws; Ensure fan is level; Remove any obstructions.

10. Specifications

Feature	Detail
Brand	Mpayel
Model Name	Ceiling Fans with Lights
Part Number	A8505-52inch
Size	52 Inch
Color	Black
Material	Acrylic, Metal, Wood
Style	Modern
Installation Type	Flush Mount
Motor Type	DC Motor
Control Method	Remote Control, App Control
Light Source Type	LED (Integrated)
Wattage	18 watts
Brightness	2500 lumens (Max)
Voltage	120 Volts
Special Features	Color Changing, Dimmable, Remote Controlled, Timer, Reversible
Item Weight	11.75 pounds
Batteries	2 AAA batteries required (included)

11. Warranty and Support

This Mpayel ceiling fan comes with a manufacturer warranty. For specific warranty details, please refer to the documentation included with your product or contact Mpayel customer support.

If you encounter any issues not covered in the troubleshooting section or require further assistance, please contact

Mpayel customer service. Contact information can typically be found on the product packaging or the official Mpayel website.

12. Product Video Overview

Watch this official product video for a visual overview of the Mpayel 52 Inch Black Ceiling Fan's features and operation.

Your browser does not support the video tag.

Video: An official scene video showcasing the Mpayel 8505-52inch Black Ceiling Fan in a living room setting, highlighting its design and functionality.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question