

EMKE XMC02BKDSX1W

EMKE 50x70cm LED Bathroom Mirror Cabinet Instruction Manual

Model: XMC02BKDSX1W

1. INTRODUCTION

Thank you for choosing the EMKE LED Bathroom Mirror Cabinet. This cabinet is designed to enhance your bathroom with its modern aesthetics and practical features, including adjustable LED lighting, an anti-fog function, and an integrated power outlet. Please read this manual thoroughly before installation and use to ensure safe operation and optimal performance.

2. SAFETY INSTRUCTIONS

- Ensure the power supply is disconnected before installation, maintenance, or cleaning.
- Installation must be performed by a qualified electrician in accordance with local wiring regulations.
- Do not use abrasive cleaners or sharp objects on the mirror surface or cabinet.
- This product is intended for indoor use only, specifically in bathrooms.
- Do not overload the internal power outlet. It is designed for low-power devices like electric shavers or toothbrushes.
- Keep children away from the product during installation and ensure they do not play with electrical components.

3. PACKAGE CONTENTS

Please check that all components are present and undamaged before proceeding with installation:

- 1 x EMKE LED Bathroom Mirror Cabinet
- 1 x Mounting Accessories Kit (screws, wall plugs, etc.)
- 1 x Instruction Manual

4. SPECIFICATIONS

Feature	Description
Brand	EMKE
Model Number	XMC02BKDSX1W
Dimensions (W x H x D)	50 x 70 x 14.5 cm
Weight	Approx. 11.93 kg
Material	Silver Mirror, Aluminum Frame, Glass Shelf, Acrylic Light Bar
Light Colors	3 (Warm White, Cool White, Neutral White)
Brightness	Dimmable (10% - 100%)
Special Features	Anti-fog function, Integrated Power Outlet, Memory Function, Wall Switch Support, Soft-Close Hinges, Double-Sided Mirror Doors
Mounting Type	Wall Mount

Note: Please measure your installation space carefully before mounting.

☀ 3000K/4000K/6500K

🕒 10-100% Helligkeit einstellbar

3 Lichtfarben
dimmbar

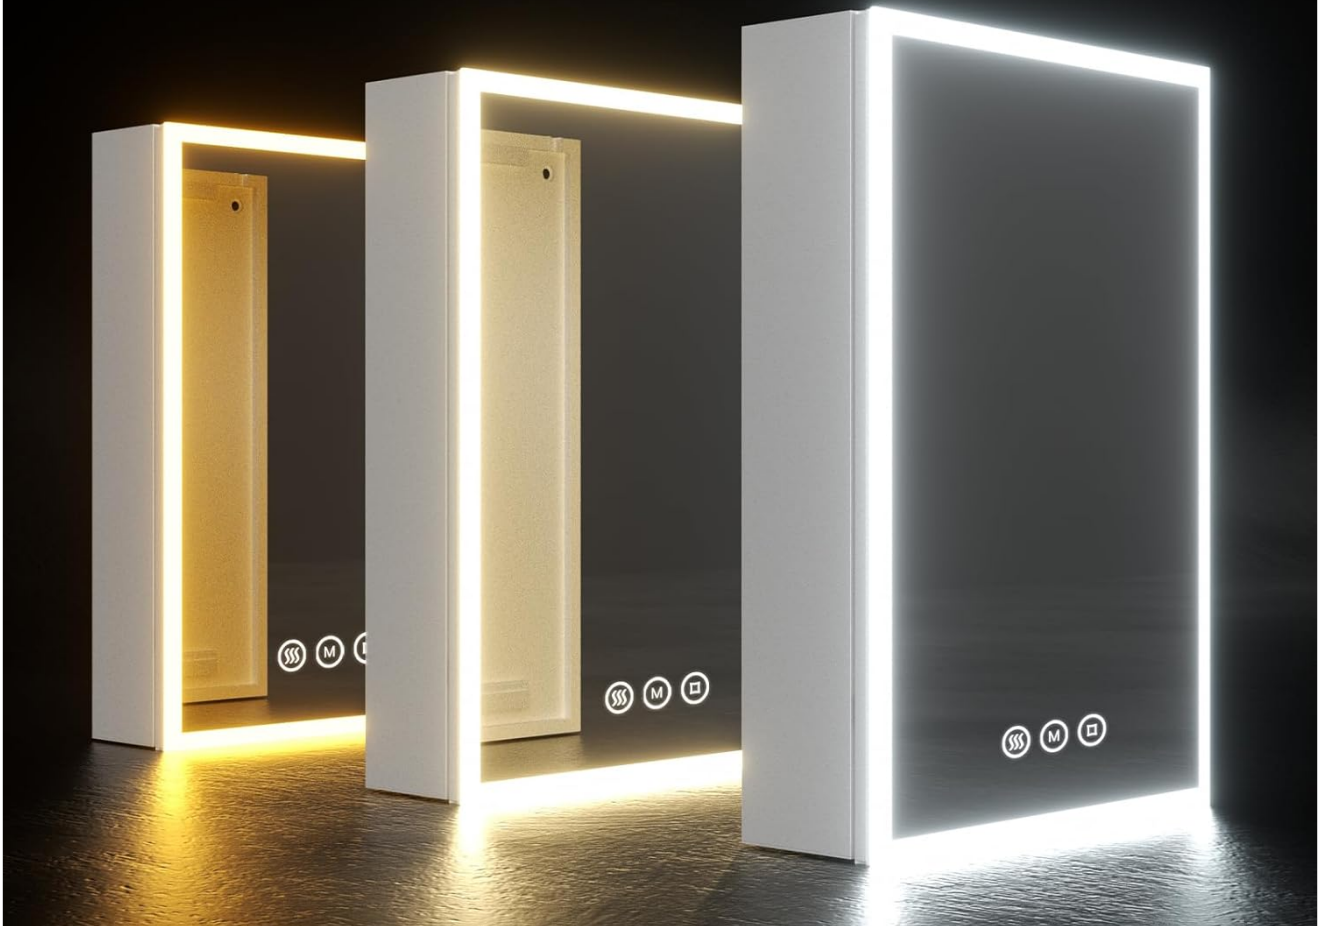


Image: Product dimensions and key features.

5. SETUP AND INSTALLATION

The EMKE mirror cabinet comes pre-assembled for easier installation. Installation typically takes 10-15 minutes with two people.

5.1 Tools Required (Not Included)

- Drill
- Measuring Tape
- Pencil
- Level
- Screwdriver

5.2 Installation Steps

1. **Prepare the Wall:** Choose a suitable location on a solid wall, away from water sources. Ensure there are no hidden

electrical wires or pipes.

2. **Mark Drilling Points:** Use a measuring tape and pencil to mark the desired height and width for the mounting holes on the wall. Use a level to ensure the marks are perfectly horizontal.
3. **Drill Holes:** Drill holes at the marked points using an appropriate drill bit for your wall type. Insert the wall plugs provided in the mounting kit.
4. **Mount the Cabinet:** Carefully lift the cabinet and align the mounting brackets on the back of the cabinet with the drilled holes. Secure the cabinet to the wall using the screws provided. Ensure it is firmly attached and stable.
5. **Electrical Connection:** Connect the cabinet's electrical wiring to your household power supply. This step **must** be performed by a qualified electrician. Ensure all connections are secure and insulated.
6. **Test Functionality:** Once installed, restore power and test all functions: lighting, dimming, color temperature change, anti-fog, and the internal power outlet.



Image: Interior storage and hinge mechanism.

6. OPERATING INSTRUCTIONS

The EMKE mirror cabinet features intuitive touch controls for its various functions.

6.1 LED Lighting Control

- **Power On/Off:** Touch the main power button on the mirror surface to turn the LED lights on or off.
- **Change Color Temperature:** With the lights on, repeatedly touch the color temperature button to cycle through Warm White (3000K), Neutral White (4000K), and Cool White (6500K).
- **Adjust Brightness (Dimming):** With the lights on, press and hold the brightness button to adjust the light intensity from 10% to 100%. Release when the desired brightness is reached.
- **Memory Function:** The cabinet will remember your last used light color and brightness settings when turned off and on again.



Image: Adjustable light colors and dimming feature.

6.2 Anti-Fog Function

- **Activate Anti-Fog:** Touch the dedicated anti-fog button on the mirror surface to activate the defogger. The anti-fog function operates independently.
- **Deactivate Anti-Fog:** Touch the anti-fog button again to turn it off.

- The anti-fog function ensures a clear reflection even after hot showers. It has an automatic shut-off after 3 hours for energy saving.

Eingebaute Steckdose



Image: Anti-fog function in use.


6.3 Integrated Power Outlet

- A convenient shaver socket is located inside the upper right section of the cabinet.
- Use this outlet to charge low-power electrical devices such as electric shavers or toothbrushes.
- **Important:** Do not connect high-power appliances to this outlet.


Hervorragender Stauraum



Gehärtete Glasablage

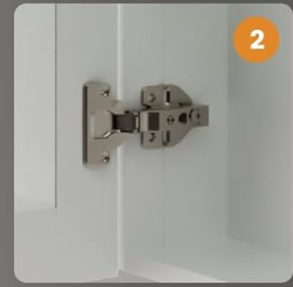

Leises Scharnier

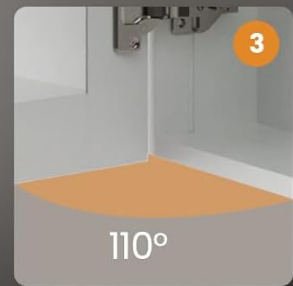

110° Türöffnungswinkel

Image: Using the integrated power outlet.

6.4 Wall Switch Support

- The mirror cabinet supports control via an external wall switch.
- For wall switch control to function, the touch switch on the mirror cabinet must remain in the 'ON' position.

Informationen zum Produkt

Hinweis: Bitte messen Sie vor dem Kauf die Größe des Installationsraums



Einheit: mm

Image: Wall switch compatibility.

7. MAINTENANCE

7.1 Cleaning

- Always disconnect power before cleaning.
- Use a soft, damp cloth and a mild, non-abrasive glass cleaner for the mirror surface.
- For the cabinet exterior, use a soft, damp cloth with mild soap and water.
- Do not spray cleaning solutions directly onto the mirror or electrical components. Apply to the cloth first.
- Wipe dry immediately with a clean, dry cloth to prevent water spots.

7.2 General Care

- Avoid exposing the cabinet to excessive moisture or direct water spray.
- Regularly check electrical connections for any signs of wear or damage. If any issues are found, consult a qualified electrician.
- Ensure the cabinet doors close smoothly. The soft-close hinges are designed for durability but avoid forcing the doors.

8. TROUBLESHOOTING

If you encounter any issues with your EMKE mirror cabinet, please refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Lights do not turn on.	No power supply, loose connection, faulty switch.	Check power supply, ensure connections are secure. If using a wall switch, ensure the mirror's touch switch is 'ON'. Consult an electrician if necessary.
Anti-fog function not working.	Anti-fog not activated, power issue.	Ensure the anti-fog button is pressed. Check power supply.
Internal power outlet not working.	No power, device requires too much power.	Check power supply. Ensure the connected device is low-power.
Lights flicker or dim unexpectedly.	Unstable power supply, loose wiring.	Check electrical connections. Consult an electrician.
Cabinet doors do not close smoothly.	Hinges require adjustment or are damaged.	Inspect hinges for damage. Adjust hinge screws if necessary.

If the problem persists after attempting these solutions, please contact EMKE customer support.

9. WARRANTY AND SUPPORT

EMKE is committed to providing high-quality products and excellent customer service.

- **Warranty:** This product comes with a **2-year warranty** from the date of purchase, covering manufacturing defects.
- **Returns:** A **14-day return policy** is offered for your convenience. Please refer to your retailer's return policy for specific details.
- **Customer Support:** For any questions, technical assistance, or warranty claims, please contact EMKE customer service through the retailer where you purchased the product or visit the official EMKE website.

Please retain your proof of purchase for warranty purposes.