

Globe Electric 66000138

GLOBE Electric 66000138 2-Light Semi-Flush Mount Ceiling Light User Manual

Model: 66000138

1. INTRODUCTION

This manual provides detailed instructions for the safe installation, operation, and maintenance of your GLOBE Electric 66000138 2-Light Semi-Flush Mount Ceiling Light. Please read all instructions carefully before beginning installation and retain this manual for future reference.

The GLOBE Electric 66000138 is a 2-light semi-flush mount ceiling fixture featuring a matte black finish and a 2-tier white linen shade. Its contemporary design is suitable for various indoor settings, including dining rooms, kitchens, and living rooms.



Image 1.1: The GLOBE Electric 66000138 2-Light Semi-Flush Mount Ceiling Light with its matte black base and two-tiered white linen shade.

2. IMPORTANT SAFETY INFORMATION

WARNING: RISK OF ELECTRIC SHOCK. Disconnect power at the circuit breaker or fuse box before installation or servicing.

- Always turn off the main power supply at the circuit breaker before installing or performing any maintenance on the fixture.
- Consult a qualified electrician if you are unsure about the installation process.
- Ensure all electrical connections are made in accordance with local codes and ordinances, as well as the National Electric Code (NEC).
- Use only the specified bulb type and wattage (2x E26/Medium Base 60W max). Exceeding the maximum wattage can cause overheating and damage to the fixture.
- Do not install this fixture in wet or damp locations. It is designed for indoor use only.
- Handle the linen shade and bulbs with care to prevent damage.

3. PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- 1 x Semi-Flush Mount Ceiling Light Fixture (Model 66000138)
- Mounting Hardware (including mounting plate, screws, wire nuts)
- Installation Instructions

Note: Light bulbs are not included and must be purchased separately.

4. PRODUCT SPECIFICATIONS

Brand	Globe Electric
Model Number	66000138
Color	Matte Black, Linen Shade
Material	Metal, Linen
Product Dimensions	15"L x 15"W x 9.75"H (38.1 cm L x 38.1 cm W x 24.76 cm H)
Installation Type	Semi-Flush Mount
Number of Light Sources	2
Bulb Base	E26 (Medium Base)
Max Wattage per Bulb	60 Watts
Voltage	120 Volts
Special Feature	Dimmable (with compatible dimmer switch, sold separately)

Power Source	Hardwired
--------------	-----------

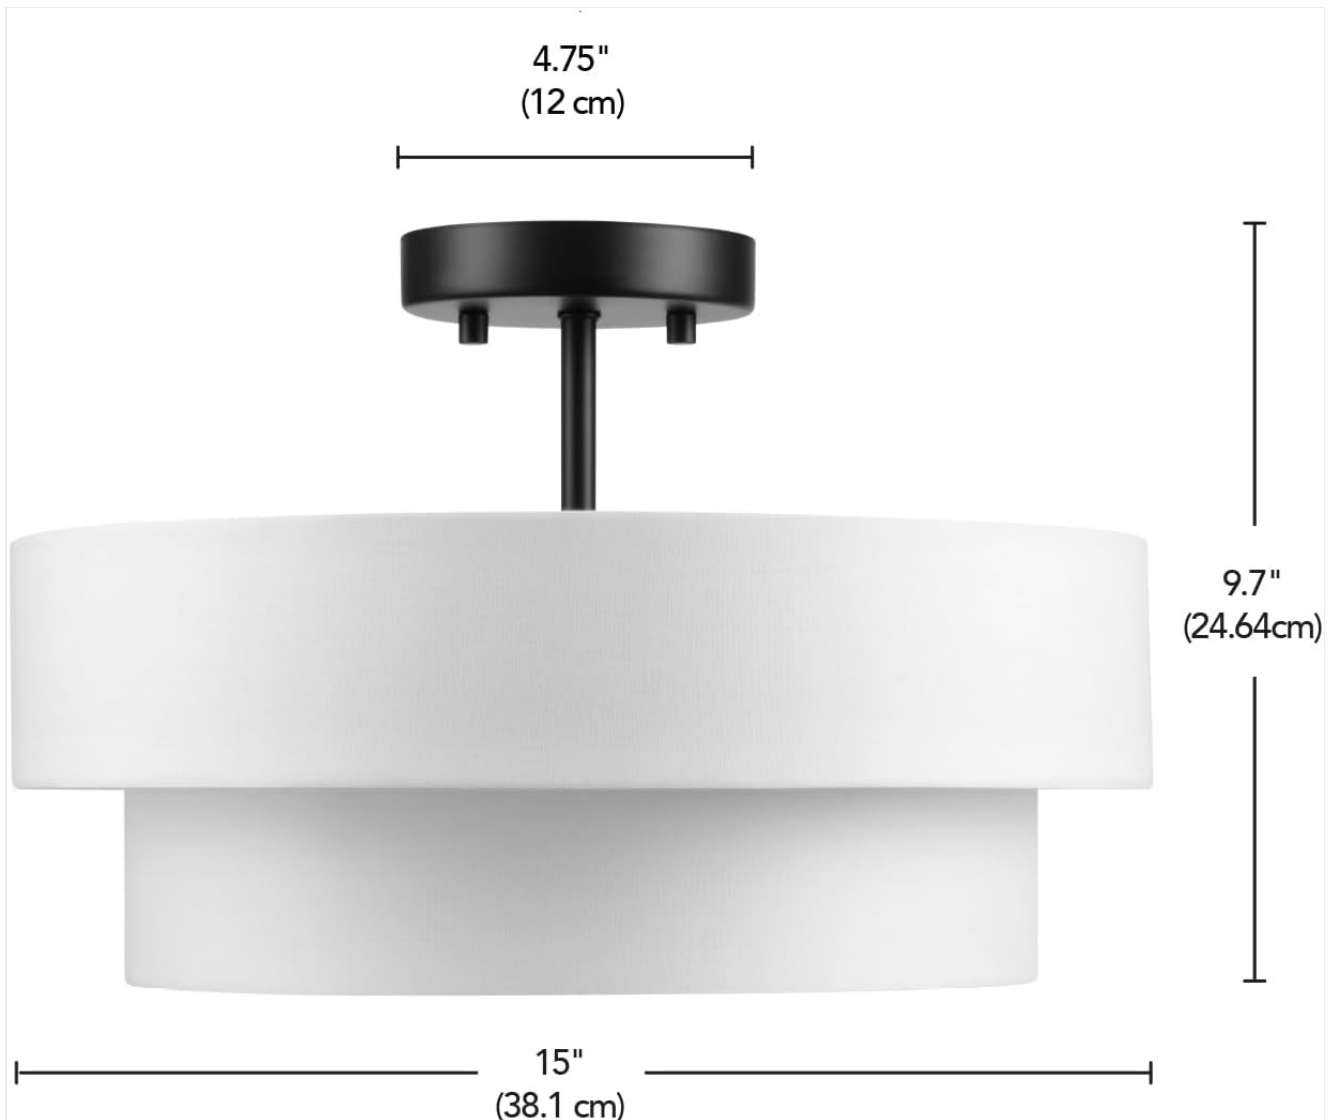


Image 4.1: Dimensional diagram of the ceiling light, showing a 15-inch diameter and 9.75-inch height.

5. SETUP AND INSTALLATION

Before you begin, ensure you have the necessary tools: screwdriver, wire strippers, electrical tape, and safety glasses.

Step-by-Step Installation:

1. **Turn Off Power:** Locate the circuit breaker that controls the power to the light fixture location and turn it off. Verify power is off using a voltage tester.
2. **Prepare Mounting Plate:** Attach the mounting plate (included in hardware) to the electrical junction box in the ceiling. Ensure it is securely fastened. *Note: Some older electrical boxes may require shorter mounting screws than those provided. Check for proper fit and acquire suitable screws if necessary.*
3. **Wire Connections:** Carefully connect the electrical wires from the fixture to the wires in the junction box.
 - Connect the **black** wire (hot) from the fixture to the **black** wire (hot) from the junction box.
 - Connect the **white** wire (neutral) from the fixture to the **white** wire (neutral) from the junction box.
 - Connect the **ground** wire (bare copper or green) from the fixture to the **ground** wire from the junction box.

Secure all connections with wire nuts and wrap with electrical tape for added safety.

4. **Mount the Fixture:** Carefully push the wired connections into the junction box. Align the fixture base with the mounting plate and secure it using the provided screws.
5. **Install Bulbs:** Screw two E26/Medium Base 60W maximum bulbs (sold separately) into the sockets. Do not overtighten.
6. **Attach Shade:** Carefully attach the 2-tier linen shade to the fixture according to the product design. Ensure it is stable and secure.
7. **Restore Power:** Turn the power back on at the circuit breaker. Test the light fixture.



Image 5.1: A close-up view of the two E26 bulb sockets within the matte black fixture base, ready for bulb installation.

6. OPERATING INSTRUCTIONS

Turning On/Off:

Operate the light fixture using a standard wall light switch connected to the circuit. Ensure the switch is in the 'ON' position.

position for the light to function.

Dimmable Feature:

This fixture is fully dimmable. To utilize the dimming function, you must install a compatible dimmer switch (sold separately) in place of your standard wall switch. Follow the dimmer switch manufacturer's instructions for installation and operation.

Bulb Compatibility:

The fixture requires two E26/Medium Base bulbs with a maximum wattage of 60W each. It is compatible with both LED and Incandescent bulbs. For smart lighting solutions, consider using Globe Electric Smart bulbs (sold separately).



Image 6.1: Examples of compatible E26 base bulbs, including standard LED, Edison-style, and Wi-Fi enabled smart bulbs.

7. MAINTENANCE

Cleaning:

To clean the fixture, ensure the power is turned off at the circuit breaker. Use a soft, dry cloth to wipe down the matte black metal components. For the linen shade, gently dust with a soft brush or a lint-free cloth. Avoid using abrasive cleaners, solvents, or polishes, as these can damage the finish and shade material.

Bulb Replacement:

Before replacing bulbs, turn off the power to the fixture at the circuit breaker. Allow bulbs to cool completely before touching them. Unscrew the old bulbs and screw in new E26/Medium Base bulbs, ensuring they do not exceed 60W each. Restore power after replacement.

8. TROUBLESHOOTING

If you encounter issues with your light fixture, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	No power to the fixture. Loose wire connection. Faulty bulb.	Check circuit breaker and wall switch. Turn off power and check wire connections. Replace bulb(s).

Light flickers.	Loose bulb. Incompatible dimmer switch. Faulty wiring.	Tighten bulbs. Ensure dimmer switch is compatible with LED/Incandescent bulbs. Turn off power and check wiring connections. Consult an electrician if needed.
Bulbs burn out quickly.	Incorrect bulb wattage. Poor ventilation.	Ensure bulbs do not exceed 60W. Verify fixture is not enclosed in a way that restricts airflow.

9. WARRANTY AND SUPPORT

Warranty Information:

This product is sold without an explicit warranty. Please refer to your retailer's return policy for any issues upon purchase.

Customer Support:




For further assistance or inquiries regarding your GLOBE Electric product, please visit the official Globe Electric website or contact their customer service department. You can often find contact information on the manufacturer's website or through your point of purchase.
Visit the [GLOBE Electric Store on Amazon](#) for more products and information.



© 2024 Globe Electric. All rights reserved.

Related Documents - 66000138

	Globe Electric 2-Light Flush Mount Installation Guide and Safety Information Detailed installation instructions, safety precautions, and product specifications for the Globe Electric 2-Light Flush Mount fixture. Includes multilingual support and parts identification.
	Globe Electric Smart LED Bulb User Manual and Setup Guide Detailed instructions and specifications for the Globe Electric Smart LED Bulb, including setup, app control, features, warranty, and safety information.
	Globe Electric D'Alessio 58" Floor Lamp - Assembly and Safety Instructions Detailed safety instructions, assembly guide, and product information for the Globe Electric D'Alessio 58" Floor Lamp. Includes multilingual safety warnings and care instructions.

	<p>Globe Electric Smart Bulb User Manual and Features</p> <p>Comprehensive guide to setting up and using the Globe Electric Smart Bulb with the Globe Suite app, including features like tunable white, scheduling, voice assistant integration, and troubleshooting.</p>
	<p>Globe Suite App Setup Guide and Smart Device Connection</p> <p>Learn how to set up the Globe Suite app, connect your smart devices using Scan, EZ, or AP modes, and integrate with voice assistants. Includes network verification steps for Globe Electric smart lighting products.</p>
	<p>Globe Electric Smart Bulb: Features, Setup, and App Control Guide</p> <p>Learn how to set up and control your Globe Electric Smart Bulb using the Globe Suite app. This guide covers features, specifications, connection instructions, app controls, and voice assistant integration.</p>