

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [Mount-It!](#) /

> [Mount-It! MI-2829XL TV Wall Mount Instruction Manual \(32-50 Inch Screens\)](#)

Mount-It! MI-2829XL

Mount-It! MI-2829XL TV Wall Mount Instruction Manual

Model: MI-2829XL | For 32-50 Inch Screens

[Safety Information](#) [Package Contents](#) [Product Features](#) [Installation Guide](#) [Operating Instructions](#) [Maintenance](#) [Troubleshooting](#) [Specifications](#) [Warranty & Support](#)

1. SAFETY INFORMATION

Please read this manual thoroughly before installation and use. Keep this manual for future reference.

- **Weight Capacity:** Do not exceed the maximum weight capacity of 44 lbs (20 kg). Exceeding this limit may result in serious injury or property damage.
- **Screen Size:** This mount is designed for TVs and monitors between 32 and 50 inches. While it can support smaller screens (17-32 inches) with extensions, ensure your TV's VESA pattern and weight are within the specified limits.
- **Wall Type:** This mount is intended for installation on single wood studs or solid concrete/brick walls. Do not install on drywall alone.
- **VESA Compatibility:** Ensure your TV's VESA mounting pattern (the distance between the four mounting holes on the back of your TV) is compatible with 75x75mm, 100x100mm, 100x200mm, 200x100mm, or 200x200mm.
- **Professional Installation:** If you are unsure about the installation process or the suitability of your wall, consult a qualified professional.
- **Component Check:** Before installation, verify that all components are present and undamaged. Do not use damaged parts.

2. PACKAGE CONTENTS

Carefully unpack the box and ensure all items are present and in good condition. Refer to the hardware bag for labeled components.

- Wall Plate Assembly (with articulating arm)
- TV Plate (VESA adapter)
- Hardware Kit (various screws, washers, spacers, wall anchors for wood stud and concrete installation)



Image: Detailed dimensions and 44 lb capacity of the Mount-It! MI-2829XL TV Wall Mount.

3. PRODUCT FEATURES

- **Universal Compatibility:** Supports TVs and monitors from 17 to 50 inches, with a maximum weight capacity of 44 lbs. Compatible with VESA patterns 75x75, 100x100, 100x200, 200x100, and 200x200mm.
- **Full Motion Adjustment:** Offers a swivel range of +/-30° and a tilt range of -12° for optimal viewing angles and glare reduction. *(Note: Tilt and swivel range may be limited by TV size.)*
- **Low Profile Design:** Keeps your TV close to the wall, with a slim 2.4-inch profile, providing a clean and modern aesthetic.
- **Durable Construction:** Made from high-grade alloy steel for maximum security and long-lasting durability.
- **Easy Installation:** Designed for quick and straightforward installation on single wood studs or solid concrete/brick walls. Includes a quick-release VESA plate for easy TV attachment and removal.

FULL MOTION MOUNT



* Tilt and swivel range might be limited by TV size *

Image: Diagram illustrating the $\pm 30^\circ$ swivel and 12° tilt capabilities of the mount.

SLIM PROFILE



Image: Side view of the mount showing its slim 2.4-inch profile when installed.

4. INSTALLATION GUIDE

Follow these steps carefully for a secure installation. Ensure you have the necessary tools (e.g., drill, stud finder, level, screwdriver).

1. **Separate Mount Components:** The mount consists of two main parts: the wall plate assembly and the TV plate. Loosen the two screws on the side of the mount to separate these components.
2. **Attach TV Plate to TV:** Select the appropriate screws from the hardware kit that fit your TV's VESA holes. Attach the TV plate to the back of your TV, ensuring it is centered and securely fastened.
3. **Determine Mounting Location:** Use a stud finder to locate a single wood stud in your desired mounting area. For concrete/brick walls, ensure the wall is solid and capable of supporting the weight. Mark the desired height and position for the wall plate.
4. **Drill Pilot Holes:** For wood stud installation, drill pilot holes using the recommended drill bit size (refer to hardware instructions). For concrete/brick walls, drill pilot holes and insert the provided concrete anchors.
5. **Attach Wall Plate to Wall:** Align the wall plate with the drilled holes and secure it to the wall using the provided lag bolts (for wood studs) or concrete screws (for concrete/brick walls). Ensure it is level and firmly attached.

6. **Mount TV to Wall Plate:** Carefully lift your TV (with the TV plate attached) and hook it onto the wall plate assembly. The quick-release mechanism allows for easy engagement.
7. **Secure TV:** Once the TV is hanging on the wall plate, tighten the two screws on the side of the mount that you loosened in Step 1. This secures the TV plate to the wall plate, preventing accidental dislodgement.



Image: Rear view of a television with the Mount-It! TV plate securely attached to its VESA mounting holes.

MOUNTING OPTIONS



Image: Illustration showing installation options for the mount on both concrete walls (using lag bolts and anchors) and wood studs (using lag bolts).

EASY INSTALLATION



Image: Diagram demonstrating the quick-release function of the VESA plate and how to secure it with a safety screw after mounting.

Video: An overview of the Mount-It! MI-2829XL Compact Full Motion TV Wall Mount, demonstrating its features like VESA compatibility, tilt, swivel, low profile, quick release, and installation process.

5. OPERATING INSTRUCTIONS

Once installed, your Mount-It! MI-2829XL TV Wall Mount allows for flexible adjustments to achieve your desired viewing experience.

- **Tilting:** Gently push or pull the top or bottom of your TV to adjust the vertical tilt angle up to 12 degrees. This helps reduce glare and optimize viewing from different heights.
- **Swiveling:** Carefully push the side of your TV to swivel it left or right up to 30 degrees. This allows for flexible viewing from various positions in the room.

Always handle the TV gently when making adjustments to avoid damage to the TV or the mount.

6. MAINTENANCE

Regular maintenance ensures the longevity and safe operation of your TV wall mount.

- **Cleaning:** Wipe the mount with a soft, dry cloth to remove dust. Avoid using abrasive cleaners or solvents that could damage the finish.
- **Periodic Checks:** Periodically check all screws and connections to ensure they remain tight and secure. Re-tighten if necessary.
- **Inspect for Damage:** Regularly inspect the mount for any signs of wear, corrosion, or damage. If any damage is found, discontinue use and contact customer support.

7. TROUBLESHOOTING

If you encounter any issues with your Mount-It! TV Wall Mount, refer to the following common problems and solutions:

- **TV is not level:** Check the wall plate installation to ensure it is perfectly level. Adjust if necessary. Some mounts allow for minor post-installation leveling adjustments.
- **Mount feels loose:** Re-check all mounting screws on both the wall plate and the TV plate. Ensure they are tightened securely. Do not overtighten.
- **Difficulty with tilt/swivel:** Ensure no cables are obstructing the movement. Check if the adjustment screws for tilt/swivel are too tight; loosen slightly if needed.
- **Missing hardware:** Contact Mount-It! customer support immediately if any parts are missing from the package.

If the problem persists, please contact Mount-It! customer support for assistance.


8. SPECIFICATIONS

Feature	Detail
Model Number	MI-2829XL
Screen Size Compatibility	17 - 50 inches (optimized for 32-50 inches)
Weight Capacity	44 lbs (20 kg)
VESA Compatibility	75x75mm, 100x100mm, 100x200mm, 200x100mm, 200x200mm
Tilt Angle	-12 degrees
Swivel Angle	+/-30 degrees
Profile from Wall	2.4 inches
Material	Alloy Steel
Color	Black
Mounting Type	Wall Mount (Single Wood Stud, Solid Concrete/Brick)

ADJUSTABLE VESA FITS TVS 17" - 50"

VESA COMPATIBLE:

75x75, 100x100, 100x200,
200 x 100 , 200x200, 250x250

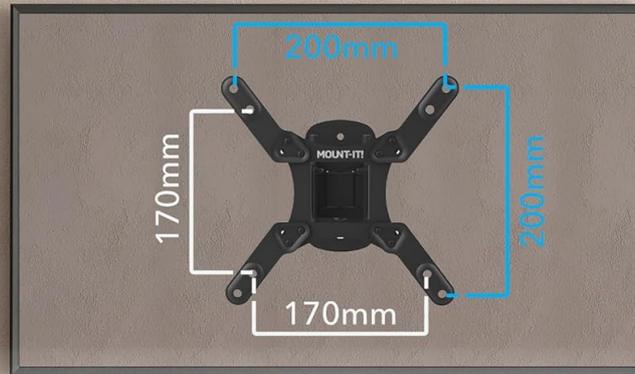

75mm x 75mm
100mm x 100mm




Image: Diagram showing various VESA patterns supported by the Mount-It! MI-2829XL TV Wall Mount.

9. WARRANTY AND SUPPORT

Mount-It! provides a **Lifetime Manufacturer Warranty** for this product, ensuring peace of mind regarding its quality and durability.

For any questions, concerns, or assistance with installation or troubleshooting, please contact our US-based customer service team. They are available to provide support and ensure a hassle-free experience.

Contact Information: Please refer to the product packaging or the official Mount-It! website for the most current customer support contact details.