

Wheatronic CF8

Wheatronic 18-inch Flush Mount Fandelier Ceiling Fan with Lights and Remote

Model: CF8

1. INTRODUCTION

Thank you for choosing the Wheatronic 18-inch Flush Mount Fandelier Ceiling Fan. This product combines the functionality of a ceiling fan with integrated lighting, designed for flush mounting in various indoor spaces such as bedrooms, kitchens, and living rooms. It features a vintage white caged design, remote control operation, and multiple fan speeds to enhance comfort and ambiance.

This manual provides essential information for the safe installation, operation, and maintenance of your new ceiling fan. Please read it thoroughly before beginning installation or use, and retain it for future reference.



Image 1.1: The Wheatronic 18-inch Flush Mount Fandelier Ceiling Fan in Vintage White.

2. SAFETY INFORMATION

To reduce the risk of electric shock, fire, or personal injury, always follow these basic safety precautions:

- **Disconnect Power:** Always turn off power at the circuit breaker or fuse box before beginning installation, cleaning, or maintenance.
- **Qualified Electrician:** Installation should be performed by a qualified electrician or a person with electrical experience.
- **Mounting Structure:** Ensure the mounting location can support the weight of the fan (approximately 8.11 pounds). The outlet box must be securely attached to the building structure.
- **Wiring:** All wiring must be in accordance with national and local electrical codes.
- **Blade Clearance:** Keep hands, objects, and clothing clear of the fan blades during operation.
- **Bulb Specifications:** Use only E26 base bulbs, maximum 60 watts per bulb. Do not exceed the recommended wattage.
- **Indoor Use Only:** This product is designed for indoor use only and is not water resistant.

3. PACKAGE CONTENTS

Verify that all components are present and undamaged before proceeding with installation. If any parts are missing or damaged, contact customer support.

- Light Shade (Caged Housing)
- Fan Blade Assembly
- Instruction Manual
- Remote Control
- Mounting Hardware (screws, wire nuts, etc.)

4. SPECIFICATIONS

Feature	Specification
Brand	Wheatronic
Model Name	CF8W (Model CF8)
Color	Vintage White
Material	Metal
Product Dimensions (L x W x H)	18" x 18" x 6.89"
Item Weight	8.09 pounds
Power Source	AC
Voltage	120 Volts (AC)
Number of Light Sources	4
Bulb Base	E26
Max Wattage per Bulb	60 watts
Control Method	Remote Control
Fan Speeds	6
Special Features	Ceiling Fan with Light, Reverse Function, Timer

■ Dimension



Image 4.1: Product dimensions, showing 18 inches in diameter and 6.89 inches in height.

Caged Ceiling Fan with Light

Illuminate your Home



E26 Medium Base
Light Bulb-Max 60W

E26 Bulb*4(not included)


Recommended bulbs :



Edison
Bulb A19



LED Bulb
A19



Edison
Bulb ST19



Edison
Bulb T14

Image 4.2: Recommended E26 bulb types (Edison Bulb A19, LED Bulb A19, Edison Bulb ST19, Edison Bulb T14) for the light fixture.

5. SETUP AND INSTALLATION

This ceiling fan is designed for easy installation. However, if you are unsure about any steps, consult a qualified electrician.

5.1 Pre-Installation

1. **Turn Off Power:** Before starting, ensure the power supply to the installation area is completely turned off at the main circuit breaker.
2. **Unpack Contents:** Carefully remove all components from the packaging and lay them out on a clean, soft surface to prevent scratches. Verify all parts listed in Section 3 are present.
3. **Prepare Wiring:** Ensure the existing electrical box is suitable for ceiling fan installation and can support the fan's weight.

5.2 Mounting the Fan

1. **Attach Mounting Bracket:** Secure the mounting bracket to the ceiling outlet box using the provided

screws and washers. Ensure it is firmly attached.

2. **Wiring Connections:** Connect the fan's electrical wires to the household wiring according to standard electrical codes (e.g., black to black, white to white, ground to ground). Use the provided wire nuts and ensure all connections are secure.
3. **Assemble Fan Body:** Attach the fan motor assembly to the mounting bracket. Follow the specific instructions in the included manual for securing the fan body and connecting any internal wiring.
4. **Install Light Shade:** Carefully attach the vintage white caged light shade to the fan body, ensuring it is securely fastened.
5. **Install Bulbs:** Screw four E26 base bulbs (not included) into the light sockets. Do not exceed 60 watts per bulb.

5.3 Post-Installation

1. **Restore Power:** Once installation is complete and all connections are secure, restore power at the circuit breaker.
2. **Test Functionality:** Use the remote control to test the fan speeds and light functions.

6. OPERATING INSTRUCTIONS

Your Wheatronic Fandelier Ceiling Fan is operated using the included remote control. Ensure the remote has working batteries installed.



Image 6.1: Remote control layout with buttons for light, fan speed, reverse function, and timer.

6.1 Remote Control Functions

- **Light On/Off:** Press the light switch button to turn the light on or off.
- **Fan On/Off:** Press the fan switch button to turn the fan on or off.
- **Fan Speed Adjustment:** Use the numbered buttons (1-6) to select your desired fan speed. '1' is the lowest speed, and '6' is the highest.
- **Reverse Function (R/F):** Press the reverse function button to change the direction of the fan blades. This allows for both summer (downward airflow for cooling) and winter (upward airflow for air circulation) modes.
- **Timer Setting:** Press the timer buttons (1H, 2H, 4H, 8H) to set the fan to automatically turn off after the selected duration.



Image 6.2: Illustration of Summer Mode (downward airflow for cooling) and Winter Mode (upward airflow for air circulation).

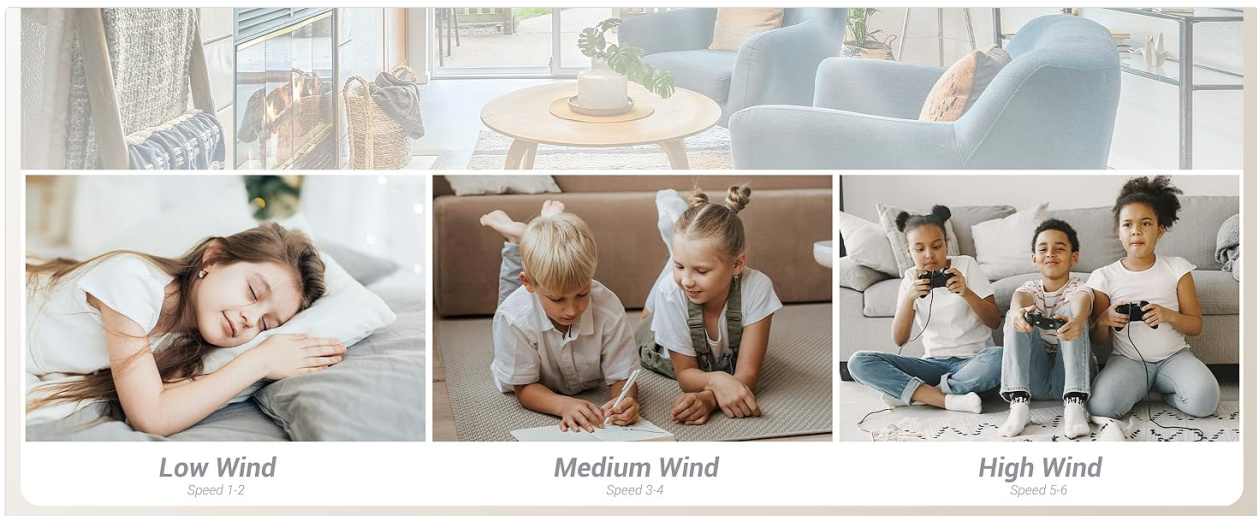


Image 6.3: Visual representation of fan speeds: Low Wind (Speed 1-2), Medium Wind (Speed 3-4), and High Wind (Speed 5-6).

7. MAINTENANCE

Regular maintenance ensures optimal performance and extends the lifespan of your ceiling fan.

7.1 Cleaning

- **Power Off:** Always turn off the power at the circuit breaker before cleaning.
- **Dusting:** Use a soft, lint-free cloth to dust the fan blades and light shade.
- **Wiping:** For more thorough cleaning, wipe surfaces with a slightly damp cloth. Do not use abrasive cleaners or solvents, as they may damage the finish.
- **Drying:** Ensure all parts are completely dry before restoring power.

7.2 Bulb Replacement

- **Power Off:** Turn off power at the circuit breaker and allow bulbs to cool before replacing.
- **Bulb Type:** Replace with E26 base bulbs, maximum 60 watts per bulb.
- **Installation:** Carefully screw in the new bulbs.

7.3 Periodic Checks

- **Tightness:** Periodically check all screws and connections to ensure they are secure.
- **Wiring:** Inspect wiring for any signs of wear or damage.

8. TROUBLESHOOTING









If you encounter issues with your fan, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Fan does not start	No power to the fan Remote control battery low/dead Loose wire connections	Check circuit breaker/fuse Replace remote control batteries Turn off power and check wiring connections
Light does not work	Bulbs are faulty or loose Loose wire connections	Turn off power, check/replace bulbs Turn off power and check light wiring connections
Fan wobbles	Mounting bracket not secure Loose screws on fan assembly	Turn off power, ensure mounting bracket is tightly secured to ceiling Turn off power, check and tighten all screws on the fan body and blade assembly
Excessive noise	Loose screws Motor issue	Turn off power, check and tighten all screws If noise persists, contact customer support
Remote control not working	Batteries low/dead Remote not paired (if applicable)	Replace batteries Refer to the specific remote pairing instructions in the full manual (if provided)

9. WARRANTY AND CUSTOMER SUPPORT

Wheatronic stands behind the quality of its products.

- **Warranty:** This product is covered by a 12-month limited product warranty from the date of purchase.
- **Customer Service:** Our dedicated customer service team is available to assist with any inquiries or issues you may have. For warranty claims or technical support, please refer to the contact information provided on your product packaging or the official Wheatronic website.

 <p>12 Inch White LED Ceiling Light</p> <p>Height: 1.5"</p> <p>Width: 12"</p> <p>Material: White Metal Frame</p> <p>Shade Material: White Polycarbonate</p> <p>Wattage: LED 12W</p> <p>Color Temperature: 3000K-6000K</p> <p>Location: Dry Location</p> <p>Dimmable: Yes</p> 	<p>Wheatronic 12 Inch White LED Ceiling Light: Assembly Guide & Specifications</p> <p>Get detailed assembly instructions and product specifications for the Wheatronic 12 Inch White LED Ceiling Light. Learn about dimensions, materials, wattage, color temperature, and installation.</p>
 <p>10 Inch Gold LED Ceiling Light</p> <p>Height: 1.5"</p> <p>Width: 10"</p> <p>Material: Gold Metal Frame</p> <p>Shade Material: White Polycarbonate</p> <p>Wattage: LED 12W</p> <p>Color Temperature: 3000K-6000K</p> <p>Location: Dry Location</p> <p>Dimmable: Yes</p> 	<p>Wheatronic 10 Inch Gold LED Ceiling Light - Modern Flush Mount Fixture</p> <p>Discover the Wheatronic 10 Inch Gold LED Ceiling Light, a modern flush mount fixture perfect for kitchens, bathrooms, and living rooms. Features include 12W LED, 3000K-6000K color temperature, dimmable functionality, and easy installation.</p>
 <p>12 Inch Black LED Ceiling Light</p> <p>Height: 1.5"</p> <p>Width: 12"</p> <p>Material: Black Metal Frame</p> <p>Shade Material: White Polycarbonate</p> <p>Wattage: LED 24W</p> <p>Color Temperature: 3000K-6000K</p> <p>Location: Dry Location</p> <p>Dimmable: Yes</p> 	<p>Wheatronic 12 Inch Black LED Ceiling Light - Installation and Specifications</p> <p>Wheatronic 12 Inch Black LED Ceiling Light, 24W, 3000K-6000K CCT, dimmable, modern flush mount fixture for dry locations. Includes assembly instructions and specifications.</p>
 <p>15 Inch Wood LED Ceiling Light</p> <p>Height: 2"</p> <p>Width: 15"</p> <p>Material: Black and Wood Metal Frame</p> <p>Shade Material: White Polycarbonate</p> <p>Wattage: LED 36W</p> <p>Color Temperature: 3000K-6000K</p> <p>Location: Dry Location</p> <p>Dimmable: Yes</p> 	<p>Wheatronic 15 Inch Wood LED Ceiling Light - Assembly and Specifications</p> <p>Detailed specifications and assembly instructions for the Wheatronic 15 Inch Wood LED Ceiling Light. Features 36W LED, 3000K-6000K color temperature, dimmable, and dry location suitability.</p>