

Zoom H1 XLR

Zoom H1 XLR Handy Recorder User Manual

Model: H1 XLR

1. INTRODUCTION

This manual provides detailed instructions for the safe and effective use of your Zoom H1 XLR Handy Recorder. The H1 XLR is a portable audio recording device designed for musicians, podcasters, filmmakers, and content creators, featuring 32-bit float recording technology and versatile input options. Please read this manual thoroughly before operating the device to ensure proper functionality and to prevent damage.

2. PRODUCT OVERVIEW

2.1. Components and Controls

Familiarize yourself with the various parts and controls of your H1 XLR recorder.

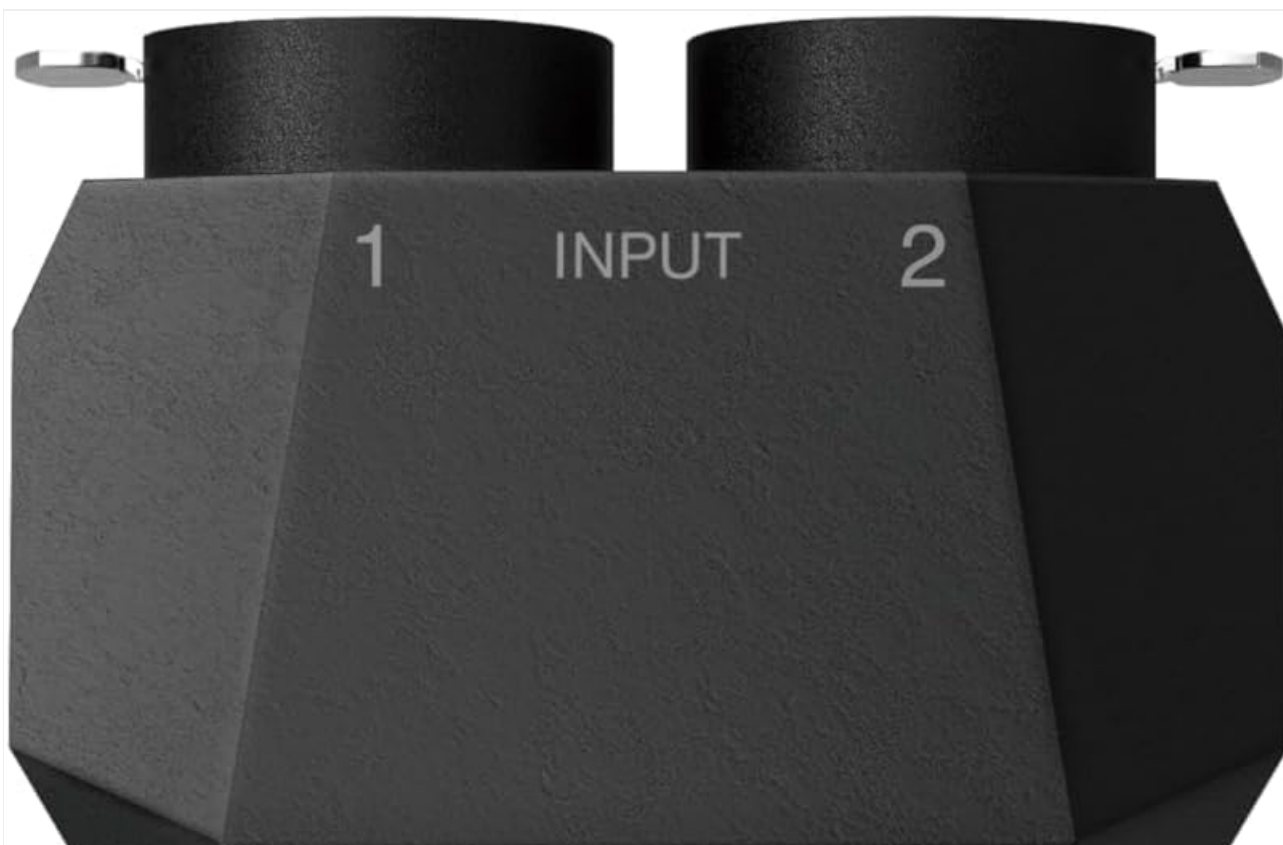




Figure 2.1: Front View of Zoom H1 XLR

This image displays the front of the Zoom H1 XLR, highlighting the two XLR/TRS combo input jacks at the top, the monochrome OLED display in the center, and the main control buttons including Record, Play/Pause, Stop, Menu, and navigation buttons.



Figure 2.2: Angled View with Side Controls

This angled view of the H1 XLR shows the side panel, which includes the LINE IN/MIC IN switch, gain adjustment knobs for inputs 1 and 2, the USB-C port, and the power/hold switch.

- **XLR/TRS Combo Inputs (1 & 2):** Connect XLR microphones or 1/4" TRS line-level devices.
- **OLED Display:** Shows recording levels, battery status, time, and menu options.
- **Record Button:** Initiates and stops recording.
- **Menu Button:** Accesses system settings and options.

- **Navigation Buttons:** Used for menu navigation and playback control.
- **LINE IN / MIC IN Switch:** Selects input type for the 3.5mm stereo jack.
- **Gain Knobs:** Adjust input sensitivity for each channel.
- **USB-C Port:** For data transfer, power, and use as an audio interface.
- **3.5mm Stereo Jack:** For connecting external microphones or line-level sources.
- **Headphone Output:** 3.5mm stereo jack for monitoring audio.
- **Power/Hold Switch:** Turns the unit on/off and locks controls.

3. SETUP

3.1. Battery Installation

1. Ensure the unit is powered off.
2. Open the battery compartment cover on the back of the unit.
3. Insert two AA batteries, observing the correct polarity (+/-) as indicated inside the compartment.
4. Close the battery compartment cover securely.

The H1 XLR supports alkaline, NiMH, and lithium AA batteries. Battery life is approximately 10 hours with alkaline batteries.

3.2. MicroSD Card Installation

1. Ensure the unit is powered off.
2. Locate the microSD card slot on the side of the unit.
3. Insert a microSD card (up to 1TB capacity supported) into the slot until it clicks into place. Ensure the card is inserted in the correct orientation.
4. To remove, gently push the card until it clicks out, then pull it from the slot.

A microSD card is required for recording audio. Format the card using the H1 XLR's menu before first use.

3.3. Powering On/Off

- **To Power On:** Slide the Power/Hold switch upwards and hold for a few seconds until the display illuminates.
- **To Power Off:** Slide the Power/Hold switch upwards and hold for a few seconds until the display turns off.
- **Hold Function:** Slide the Power/Hold switch downwards to the 'HOLD' position to lock all buttons and prevent accidental operation during recording or transport.

4. BASIC OPERATION

4.1. Connecting Microphones and Line Devices

- **XLR Microphones:** Connect XLR cables from your microphones to the XLR/TRS combo inputs (1 and 2) at the top of the unit. Ensure the cables lock securely.
- **1/4" TRS Line Devices:** Connect 1/4" TRS cables from line-level sources to the XLR/TRS combo inputs (1 and 2).
- **3.5mm Stereo Input:** For external stereo microphones or line-level devices, connect to the 3.5mm stereo jack. Use the LINE IN / MIC IN switch to select the appropriate input level.



Figure 4.1: Connecting XLR Cables

This image shows a user holding the H1 XLR with two XLR cables securely connected to the top input jacks, demonstrating the device's readiness for external microphone input.

4.2. Recording Audio

1. Connect your audio source(s).
2. Power on the H1 XLR.
3. Adjust the input gain for each channel using the dedicated gain knobs. Monitor the levels on the OLED display to ensure they are not clipping. The 32-bit float recording feature provides significant headroom, reducing the risk of clipping.
4. Press the **Record** button once to enter record-standby mode. The record indicator will flash.
5. Press the **Record** button again to start recording. The record indicator will illuminate steadily.
6. To stop recording, press the **Stop** button. The recorded file will be saved to the microSD card.

4.3. Monitoring Audio

Connect headphones to the 3.5mm headphone output jack to monitor your audio in real-time during recording or playback. Adjust the headphone volume using the dedicated volume controls.

4.4. Playback

1. Navigate to the desired file using the navigation buttons.
2. Press the **Play/Pause** button to start playback.
3. Press the **Play/Pause** button again to pause playback.
4. Press the **Stop** button to stop playback.

5. ADVANCED FEATURES

5.1. USB Audio Interface Functionality

The H1 XLR can function as a 2-input/2-output USB audio interface for your computer or mobile device. Connect the H1 XLR to your computer or smartphone via the USB-C port. Select 'Audio Interface' mode from the device's menu. This allows you to record directly to your digital audio workstation (DAW) or use the H1 XLR as a high-quality microphone input for live streaming or video conferencing.



Figure 5.1: H1 XLR as an Audio Interface

This image illustrates the Zoom H1 XLR connected to a smartphone, showcasing its capability to serve as an external audio interface for mobile recording or streaming setups.

5.2. 32-Bit Float Recording

The H1 XLR utilizes 32-bit float recording technology, which captures audio with an extremely wide dynamic range. This virtually eliminates the need to set input gain levels precisely, as clipping is prevented even with very loud signals. You can adjust the volume of your recordings in post-production without introducing noise or distortion.

6. MAINTENANCE

- Keep the unit dry and clean. Avoid exposure to extreme temperatures, humidity, or direct sunlight.
- Use a soft, dry cloth to clean the exterior. Do not use abrasive cleaners or solvents.
- Remove batteries if the unit will not be used for an extended period to prevent leakage.
- Handle the microSD card with care to prevent data loss.

7. TROUBLESHOOTING

- **Unit does not power on:** Check battery installation and charge level. Ensure the Power/Hold switch is not in the 'HOLD' position.
- **No audio recorded:** Verify a microSD card is inserted and formatted. Check input connections and gain levels. Ensure the correct input type (LINE IN/MIC IN) is selected.
- **Poor audio quality:** Check microphone connections. Ensure gain levels are appropriate (though 32-bit float minimizes clipping, extremely low levels can introduce noise). Try a different microphone or cable.
- **Buttons unresponsive:** Check if the Power/Hold switch is in the 'HOLD' position.

For further assistance, refer to the official Zoom support resources.

8. SPECIFICATIONS

Feature	Specification
Model Number	H1 XLR

Recording Format	WAV (32-bit float)
Inputs	2 x XLR/TRS Locking Combo Jacks, 1 x 3.5mm Stereo Mini Jack
Outputs	1 x 3.5mm Headphone/Line Output
Display	0.96" Monochrome OLED
Power Source	2 x AA Batteries (Alkaline, NiMH, Lithium) or USB-C
Battery Life	Approx. 10 hours (Alkaline)
Storage Media	microSD/microSDHC/microSDXC card (up to 1 TB)
USB Interface	USB Type-C (for data transfer, power, and audio interface)
Dimensions (W x D x H)	5.8 x 3.8 x 1.9 inches (approximate)
Weight	6.4 ounces / 0.4 pounds (without batteries)

9. SAFETY INFORMATION

- Do not attempt to disassemble or modify the unit.
- Avoid dropping or subjecting the unit to strong impacts.
- Keep out of reach of children.
- Dispose of batteries according to local regulations.
- Use only specified power sources and accessories.

10. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the official Zoom website or contact your local distributor. Keep your purchase receipt as proof of purchase.

Related Documents - H1 XLR

	ZOOM H6essential Handy Recorder Operation Manual Comprehensive operation manual for the ZOOM H6essential Handy Recorder, detailing its features, recording capabilities, audio interface functions, and setup instructions.
	ZOOM H5 Handy Recorder Operation Manual This operation manual details the features, setup, and usage of the ZOOM H5 Handy Recorder, a versatile portable audio device for professional recording applications.

	ZOOM F3 Field Recorder Operation Manual This operation manual provides detailed instructions and specifications for the ZOOM F3 Field Recorder, covering its features, recording capabilities, audio interface functions, and settings.
	ZOOM F3 Field Recorder Operation Manual Comprehensive operation manual for the ZOOM F3 Field Recorder, detailing features, recording techniques, audio interface capabilities, settings, and troubleshooting for professional audio capture.
	ZOOM UAC-232 USB Audio Converter Operation Manual This operation manual provides detailed information on the ZOOM UAC-232 USB Audio Converter, covering its features, setup, operation, and troubleshooting. Learn about high-quality audio inputs, 32-bit float recording, connecting to computers and mobile devices, and using the included ZOOM UAC-232 Mix Control software for music production and streaming.
	ZOOM H6studio Handy Recorder - ZOOM H6studio

Documents - Zoom – H1 XLR



[pdf]

H1 XLR ZOOM CORPORATION Scarica il manuale Registratore Zoom i h1 xlr cavallimusica media productattach |||

Manuale operativo Leggete attentamente le Precauzioni d uso e sicurezza prima dell utilizzo. 2024 ZO 2 Veduta d insieme di **H1 XLR**.....

lang:it score:38 filesize: 2.85 M page_count: 142 document date: 2024-10-07




[pdf] Installation Guide Guide

H1 XLR H1XLR Accessibility Installation Guide JPN zoomcorp coreclients net media documents |||

H1 XLR Copyright C 2024 ZOOM CORPORATION. All Rights Reserved. **H1 XLR** Windows Mac USB Type-C microSDHC4 GB 32 GB microSDXC64 GB 1 TB microSD microSD **H1 XLR** H1XLR H1XLR X1 XLR zoomcorp.com/help/h1xlr 1. 2. ZIP 3. microSD 4. 5. Version 1.00 H1 X...

lang:nl score:37 filesize: 1.16 M page_count: 10 document date: 2024-08-21

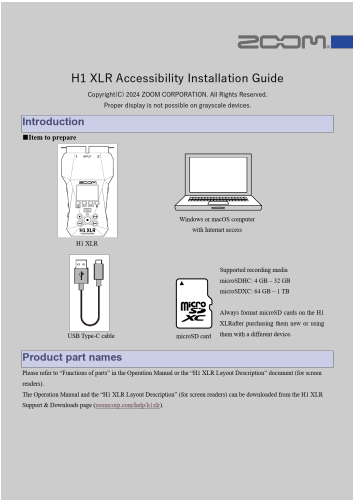

[pdf] User Manual Installation Guide Guide

H1 XLR Accessibility Installation GuideQuick GuidesH1XLR Guide ENzoomcorp coreclients net documents 3274 H1XLR EN |||

H1 XLR Accessibility Installation Guide Copyright C 2024 ZOOM CORPORATION. All Rights Reserved. Proper display is not possible on grayscale devices. Introduction Item to prepare **H1 XLR** Windows or macOS computer with Internet access Supported recording media microSDHC: 4 GB 32 GB microSDXC: 64 G...

lang:en score:36 filesize: 1.23 M page_count: 10 document date: 2024-10-02



[pdf] User Manual Specifications

H1 XLR ZOOM CORPORATION Zoom Manual 456a0d5ef1ffc2dc77accfd7bbb13eb73780 gzhl at blob ldb e 9 b 4 |||

Operation Manual You must read the Usage and Safety Precautions before use. 2024 ZOOM CORPORATION Co ...

..... 2 **H1 XLR** overview.....

lang:en score:36 filesize: 3.06 M page_count: 140 document date: 2024-08-23




[pdf] User Manual

H1 XLR ZOOM CORPORATION Manual de Instrucciones Spanish 2 MB S zoomcorp media documents

|||

Manual de instrucciones Lea las precauciones de uso y seguridad antes de utilizar esta unidad. 2024 2
Resumen del **H1 XLR**.....
lang:es score:34 filesize: 2.88 M page_count: 145 document date: 2024-10-08

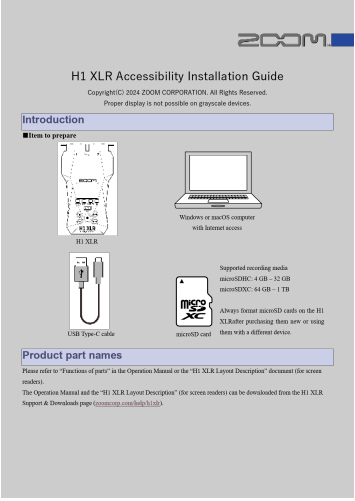

H1 XLR Accessibility Installation Guide - ZOOM

Official installation guide for the ZOOM H1 XLR's accessibility features, including guide sound installation and updates for Windows and macOS. Covers downloading, extracting, copying files to microSD, and confirming installation.
lang:en score:33 filesize: 1.23 M page_count: 10 document date: 2024-10-02



[pdf]

H1 XLR ZOOM CORPORATION H1 XLR Bedienungsanleitung German 2 MB D zoomcorp media documents |||

Bedienungsanleitung Bitte lesen Sie vor dem Gebrauch unbedingt die Sicherheits- und Gebrauchshinweis ...

.....2 **H1 XLR** im
berblick.....

lang:de **score:27** filesize: 2.87 M page_count: 146 document date: 2024-10-07



[pdf]

H1 XLR ZOOM CORPORATION C zoomcorp coreclients net media documents |||

2024 ZOOM CORPORATION Microsoft Windows Microsoft MacmacOSiPhoneiPad
Lightning Appl 2 **H1
XLR**

lang:it **score:27** filesize: 2.78 M page_count: 136 document date: 2024-10-25



[pdf]

H1 XLR Handy Recorder Aug 13 2024 — ZOOM CORPORATION E proibita la copia o stampa totale parziale di questo manuale senza autorizzazione Potreste aver bisogno I H1XLR QuickTour zoomcorp coreclients net media documents |||

H1 XLR Handy Recorder Guida rapida Software e documenti relativi a questo prodotto si trovano sul seguente sito web. zoomcorp.com/help/h1xlr Leggete attentamente le Precauzioni d'uso e sicurezza prima dell'utilizzo. 2024 ZOOM CORPORATION E proibita la copia o la stampa, totale o parziale, di quest...

lang:it **score:27** filesize: 1.59 M page_count: 23 document date: 0000-00-00



[pdf]

H1 XLR ZOOM CORPORATION h1xlr Bedienungsanleitung keepdrum de media products |||

Bedienungsanleitung Bitte lesen Sie vor dem Gebrauch unbedingt die Sicherheits- und Gebrauchshinweis ...

.....2 **H1 XLR** im
berblick.....

lang:de **score:26** filesize: 1.94 M page_count: 146 document date: 2024-12-19



[pdf]

H1 XLR 3 MB ZOOM J zoomcorp media documents |||

2024 ZOOM CORPORATION MicrosoftWindows

MacmacOSiPhoneiPadLightningApple Inc. iPhone microSDXCSD-3C LLC USB Type-C
USB Implementers Forum CD 2

..... 2 **H1
XLR**.....

lang:it **score:26** filesize: 3.1 M page_count: 141 document date: 2024-08-23



[pdf]

H1 XLR ZOOM CORPORATION Chinese Released 10 25 2024 C zoomcorp documents 3287 |||

2024 ZOOM CORPORATION Microsoft Windows Microsoft MacmacOSiPhoneiPad
Lightning Appl 2 **H1
XLR**

lang:it **score:25** filesize: 2.83 M page_count: 136 document date: 2024-10-25



[pdf]

H1 XLR ZOOM CORPORATION Mode d'emploi French 2 MB F zoomcorp media documents |||

Mode d'emploi Vous devez lire les Précautions de sécurité et d'emploi avant toute utilisation. 2024 ZOO ... 2

Présentation du **H1 XLR**.....

lang:fr score:25 filesize: 2.82 M page_count: 145 document date: 2024-10-07



[pdf]

H1 XLR ZOOM CORPORATION Mode d'emploi French 2 MB Assistance XLR F XLR zoomcorp core clients net media documents F |||

Mode d'emploi Vous devez lire les Précautions de sécurité et d'emploi avant toute utilisation. 2024 ZOO ... 2

Présentation du **H1 XLR**.....

lang:fr score:24 filesize: 2.82 M page_count: 145 document date: 2024-10-07



[pdf] User Manual Specifications

H1 XLR Quick Tour Released 08 13 2024 ZOOM E H1XLR QuickTour zoomcorp documents 3119 |||

H1 XLR Handy Recorder Quick Tour Software and documents related to this product can be found at the following website. zoomcorp.com/help/h1xlr You must read the Usage and Safety Precautions before use. 2024 ZOOM CORPORATION Copying or reprinting this manual in part or in whole without permission is...

lang:en score:23 filesize: 1.61 M page_count: 23 document date: 0000-00-00



[\[pdf\]](#) User Manual

Bedienungsanleitung Zoom H1 XLR ab € 170 19 2024 Preisvergleich Geizhals Österreich

```
f3f9dc1a5d8ac1328dd67eda37f9b778c3ab gzhl5 at blob ldb d f b |||
```

H1 XLR Handy Recorder Kurzanleitung Software und Dokumente zu diesem Produkt
finden Sie auf der folgenden Webseite. zoomcorp.com/help/h1xlr Bitte lesen Sie vor dem Gebrauch unbedingt die Sicherheits- und Gebrauchshinweise. 2024 ZOOM CORPORATION Dieses Handbuch darf weder in Teilen noch als Ganzes o...
lang:de score:22 filesize: 1.6 M page_count: 23 document date: 0000-00-00

[\[pdf\]](#)

Cena 19 080 00 rsd AC adapter ZOOM AD 17 DC 5 V 1 A Zoom H1 XLR Šifra 19361 Kategorija
proizvoda Snimači Rekorderi Proizvođač document player rs stampanje 31159 |||

Ilmagagoe not found or type unknown Firma: Player Plus doo Adresa: Svetogorska 9
Telefon: 381 11 3347 442 Fax: 381 11 3347 615 PIB: 106966344 E-mail: porudzbine
player.rs Zlmoaogme noHt1fouXnLdRor type unknown Zoom **H1 XLR** INPUTS
MIC/LINE mono Sifra: 19361 Connectors: 2 XLR/TRS combo jack...
lang:en **score:22** filesize: 27.5 K page count: 2 document date: 2025-06-16



[\[pdf\]](#) User Manual Specifications

H1 XLR Quick TourQuick GuidesE H1XLR QuickTourzoomcorp coreclients net documents 3119 E
QuickTour |||

H1 XLR Handy Recorder Quick Tour Software and documents related to this product can be found at the following website. zoomcorp.com/help/h1xlr You must read the Usage and Safety Precautions before use. 2024 ZOOM CORPORATION Copying or reprinting this manual in part or in whole without permission is...

lang:en score:20 filesize: 1.6 M page_count: 23 document date: 2024-08-13



[pdf] User Manual

H1 XLR Handy Recorder Aug 13 2024 — ZOOM CORPORATION Queda prohibida la copia o reproducción de este documento tanto completa como parcial sin el correspondiente permiso S H1XLR QuickTour zoomcorp coreclients net media documents |||


H1 XLR Handy Recorder Gua de inicio rpido En la siguiente pgina web encontrar apps de software y otros documentos relacionados con este producto. zoomcorp.com/help/h1xlr Lea las precauciones de uso y seguridad antes de utilizar esta unidad. 2024 ZOOM CORPORATION Queda prohibida la copia o reproduc... lang:es score:19 filesize: 1.61 M page_count: 23 document date: 0000-00-00



[pdf]

H1 XLR Handy Recorder Aug 13 2024 — ZOOM CORPORATION La copie et la reproduction partielles ou totales de ce document sans permission sont interdites Vous pouvez avoir besoin mode F H1XLR QuickTour zoomcorp coreclients net media documents |||

H1 XLR Handy Recorder Prise en main Vous trouverez des logiciels et d autres documents relatifs ce produit sur le site web ci-dessous. zoomcorp.com/help/h1xlr Vous devez lire les Prcautions de scurit et d emploi avant toute utilisation. 2024 ZOOM CORPORATION La copie et la reproduction partielles ... lang:fr score:19 filesize: 1.61 M page_count: 23 document date: 0000-00-00

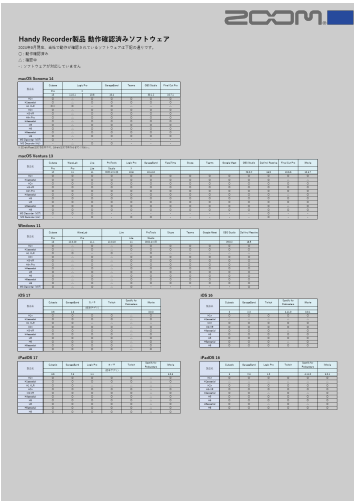

[pdf]

Handy Recorder ZOOM○ H1 XLR ○※ ○ △ H2n H3 VR H4n Pro H4essential H5 △HAR DAW compatibility 2024SEP Jzoomcorp stage coreclients net documents 1249 HAR J |||

Handy Recorder 20249 : - : macOS Sonoma 14 Cubase Logic Pro Pro X 13 11.0.1 10.8 H1n H1essential **H1 XLR** H2n H3-VR H4n Pro H4essential H5 H6 H6essential H8 MS Decoder VST - - MS Decoder AU - ... lang:af score:18 filesize: 135.78 K page_count: 1 document date: 2024-09-17



[pdf]

H1 XLR Handy Recorder Aug 13 2024 — ZOOM CORPORATION

J H1XLR QuickTour zoomcorp coreclients net media documents |||

H1 XLR Handy Recorder Web zoomcorp.com/help/h1xlr 2024 ZOOM

CORPORATION microSD microSDHC : 4 GB 32 GB microSDXC : 64 GB 1 TB

microSD microSD ZOOM WEB zoomcorp.com microSD OFF microSD microSD 2 No

No AB No NEW OLD Good AC ZOOM AD-17...

lang:en **score:18** filesize: 1.66 M page_count: 23 document date: 0000-00-00



[pdf]

User Manual Specifications

H1 XLR Handy Recorder 13 août 2024 — □ Connecting headphones and adjusting the volume

Headphones Adjusting balance of input sounds Select a track confirm Adjust 23 pages E H1XLR

QuickTour zoomcorp media documents |||

H1 XLR Handy Recorder Quick Tour Software and documents related to this product

can be found at the following website. zoomcorp.com/help/h1xlr You must read the

Usage and Safety Precautions before use. 2024 ZOOM CORPORATION Copying or

reprinting this manual in part or in whole without permission is...

lang:en **score:18** filesize: 1.6 M page_count: 23 document date: 0000-00-00

H1 XLR 動作確認済みmicroSDHC/microSDXCカード		
2024年8月現在、各社で互換動作が確認されているmicroSDHC/microSDXCカードは以下の通りです。		
容量	ブランド	品番
8 GB	Silicon Power	SP08GBSTH61V10SP
	Transcend	TS8GBU3020S
	SanDisk	SD801A4-0103
	Kingston	PMU-E103
16 GB	Silicon Power	SP16GBSTH61V10SP
	Transcend	TS16GBU3020S
	SanDisk	SD160A4-0203
	Kingston	PMU-E203
32 GB	LEXAR	LSNM333EUF1033A
	SanDisk	SD320A4-0203
	Transcend	TS32GBU3020S
	DELKIN D-EVISES	COMS600040
64 GB	SanDisk	SD640A4-0403
	Kingston	PMU-E403
	SanDisk	LSNM333EUF1033A
	Silicon Power	SP64GBSTH61V10SP
128 GB	SanDisk	SD128A4-0203
	Transcend	TS128GBU3020S
	Kingston	PMU-E128
	LEXAR	LSNM333EUF1033A
256 GB	Silicon Power	SP256GBSTH61V10SP
	Transcend	TS256GBU3020S
	Kingston	PMU-E256
	SanDisk	SD256A4-0203
512 GB	SanDisk	SD512A4-0203
	Transcend	TS512GBU3020S
	Kingston	PMU-E512
	LEXAR	LSNM333EUF1033A
1 TB	SanDisk	SD1001A-0103
	Transcend	TS1001GBU3020S
	Kingston	PMU-E1001
	LEXAR	LSNM333EUF1033A

[pdf]

Safety Datasheet

H1 XLR microSDHC microSDXC Aug 14 2024 — 2024 8

microSDHC microSDXC

©2024 ZOOM CORPORATION Z2I 5375 01 H1XLR Compatible microSDHC SDXC Cards J zoomcorp

coreclients net documents 3129 |||

H1 XLR microSDHC/microSDXC 20248microSDHC/microSDXC 8 GB 16 GB 32 GB

64 GB 128 GB 200 GB 256 GB 400 GB 512 GB 1 TB Silicon Power Transcend

SanDisk KIOXIA Silicon Power Transcend SanDisk KIOXIA LEXAR Kingston

Transcend DELKIN DEVICES SanDisk KIOXIA LEXAR Silicon Power Kingston

Transcend DELKI...

lang:i-klngon **score:18** filesize: 113.24 K page_count: 1 document date: 2024-08-14



[pdf]

H1 XLR Handy Recorder Aug 13 2024 — ZOOM CORPORATION

C H1XLR QuickTour zoomcorp coreclients net media documents |||


H1 XLR Handy Recorder zoomcorp.com/help/h1xlr 2024 ZOOM CORPORATION

microSD : microSDHC: 4 GB 32 GB microSDXC: 64 GB 1 TB microSD microSD

ZOOM zoomcorp.com microSD microSD microSD 5 2 No No AB No NEW OLD Good

AC AD-17 AC ZOOM AD-17 3 ...

lang:nl **score:18** filesize: 1.7 M page_count: 23 document date: 0000-00-00

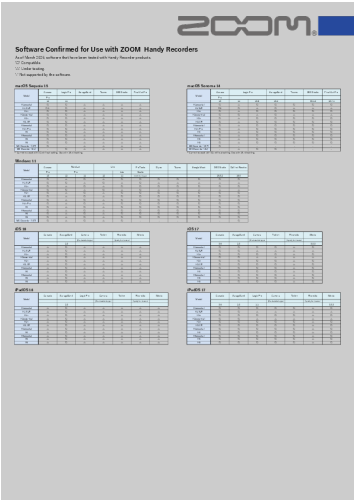

[pdf]

ZOOM Handy Recorders HAR DAW compatibility 2025MAR E zoomcorp media documents |||


Software Confirmed for Use with ZOOM Handy Recorders As of March 2025,

software that have been tested with Handy Recorder products. Compatible. Under

testing. - Not supported by the software. macOS Sequoia 15 Cubase Logic Pro

GarageBand Model Pro 14 11 H1essential **H1 XLR** ...

lang:en **score:16** filesize: 105.23 K page_count: 1 document date: 2025-03-07

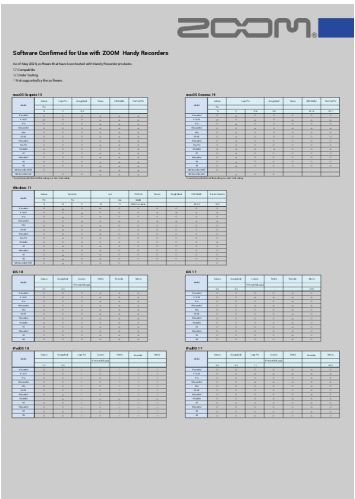

[pdf]

Compatible Software ZOOM HAR DAW compatibility 2025MAY E zoomcorp documents 1335 |||

Software Confirmed for Use with ZOOM Handy Recorders As of May 2025, software

that have been tested with Handy Recorder products. Compatible. Under testing. -

Not supported by the software. macOS Sequoia 15 Cubase Logic Pro Model Pro 14

11 H1essential **H1 XLR** * H1n H2essen...

lang:en **score:16** filesize: 367.53 K page_count: 1 document date: 2025-05-09

ZOOM

CONFERENCE

ONLINE

SCHEDULE

2020

2021

2022

2023

2024

2025

2026

2027

2028

2029

2030

2031

2032

2033

2034

2035

2036

2037

2038

2039

2040

2041

2042

2043

2044

2045

2046

2047

2048

2049

2050

2051

2052

2053

2054

2055

2056

2057

2058

2059

2060

2061

2062

2063

2064

2065

2066

2067

2068

2069

2070

2071

2072

2073

2074

2075

2076

2077

2078

2079

2080

2081

2082

2083

2084

2085

2086

2087

2088

2089

2090

2091

2092

2093

2094

2095

2096

2097

2098

2099

2100

2101

2102

2103

2104

2105

2106

2107

2108

2109

2110

2111

2112

2113

2114

2115

2116

2117

2118

2119

2120

2121

2122

2123

2124

2125

