Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

JYX JYX-MS73

JYX Bluetooth PA Speaker System User Manual

Model: JYX-MS73

Brand: JYX

Introduction

Thank you for choosing the JYX Bluetooth PA Speaker System. This versatile karaoke machine is designed to provide high-quality audio and entertainment for various occasions, from home parties to outdoor gatherings. Featuring dual wireless microphones, vibrant LED lights, and multiple connectivity options, it offers a comprehensive audio experience. This manual provides detailed instructions on setting up, operating, and maintaining your speaker system to ensure optimal performance and longevity.



The JYX Bluetooth PA Speaker System, complete with its two wireless microphones, remote control, and shoulder strap, ready for use.

What's in the Box

Please check the package contents to ensure all items are present and in good condition:

- JYX Bluetooth PA Speaker System (JYX-MS73)
- Wireless Microphone x 2
- Remote Control
- 3.5mm AUX Cable
- USB Type-C Charging Cable
- Shoulder Strap
- User Manual



An illustration showing all components included in the JYX Karaoke Machine package.

Product Features

The JYX-MS73 speaker system is equipped with a range of features designed for superior audio performance and user convenience:

- **Dual Wireless Microphones:** Comes with two UHF wireless microphones that automatically connect to the speaker, offering stable signals and adjustable frequencies for optimal performance.
- **HD Stereo Sound Quality:** Features an 8-inch subwoofer and a 5.25-inch tweeter for crystal-clear, immersive sound with independent Reverb, Treble, and Bass adjustments.
- **Dazzling Disco Lights:** Integrated colorful LED disco lights create a vibrant atmosphere, enhancing your karaoke and party experience.
- **Vocal Cut Function:** Allows you to remove original singer vocals from tracks, enabling you to sing along with just the instrumental accompaniment.
- **Long-lasting Rechargeable Battery:** Built-in 5200mAh high-efficiency battery provides extended playtime, perfect for both indoor and outdoor use.
- **Multiple Connectivity Options:** Supports Bluetooth, AUX-IN, TWS (True Wireless Stereo), USB input, and TF card connection for compatibility with various devices like smartphones, tablets, and PCs.



An exploded view of the speaker illustrating its 8-inch subwoofer and 5.25-inch tweeter, which contribute to its high-definition stereo sound.



This image highlights the speaker's 5200mAh battery, offering up to 48 hours of playtime depending on volume levels.



The speaker's dynamic and colorful disco lights are shown, creating an immersive karaoke experience.

Setup Guide

Follow these steps to set up your JYX PA Speaker System for the first time:

1. **Unpack and Inspect:** Carefully remove all components from the packaging. Inspect for any damage during transit.
2. **Charge the Speaker:** Before first use, fully charge the speaker using the provided USB Type-C charging cable. Connect the cable to the speaker's charging port and a compatible USB power adapter (not included). The charging indicator will show the status.
3. **Prepare Microphones:** Ensure the wireless microphones are charged or have fresh batteries. Turn on the microphones; they will automatically pair with the speaker when the speaker is powered on.
4. **Power On:** Press and hold the power button on the speaker to turn it on. You will hear a power-on prompt.

Operating Instructions

This section details how to use the various functions of your JYX PA Speaker System.

Control Panel Overview



A detailed view of the speaker's control panel, showing the various adjustment knobs for sound customization.

- **MIC.VOL:** Adjusts the volume of the microphones.
- **ECHO:** Controls the echo effect for the microphones.
- **BASS:** Adjusts the bass level of the music playback.
- **TREBLE:** Adjusts the treble level of the music playback.
- **MASTER:** Controls the overall master volume of the speaker.
- **Vocal Cut/Accompany:** Button to enable or disable the vocal cut function.
- **LED On/Off:** Button to control the disco lights.

Connectivity Modes

The speaker supports several input methods:

- **Bluetooth Mode:**
  1. Turn on the speaker. It will automatically enter Bluetooth pairing mode (indicated by a flashing Bluetooth icon or voice prompt).
  2. On your device (smartphone, tablet, etc.), enable Bluetooth and search for "JYX-MS73".

3. Select "JYX-MS73" to pair. Once connected, you will hear a confirmation sound.
4. You can now play audio from your device wirelessly.

- **USB/TF Card Mode:**
  1. Insert a USB flash drive or TF (microSD) card into the respective port on the speaker.
  2. The speaker will automatically detect the storage device and begin playing supported audio files.
  3. Use the control panel or remote to navigate tracks and adjust volume.
- **AUX Input Mode:**
  1. Connect one end of the 3.5mm AUX cable to the AUX-IN port on the speaker.
  2. Connect the other end to the audio output jack of your external device (e.g., MP3 player, computer).
  3. The speaker will automatically switch to AUX mode.
- **TWS (True Wireless Stereo) Function:**
  If you have two JYX-MS73 speakers, you can pair them for a stereo sound experience.
  1. Ensure both speakers are powered on and not connected to any Bluetooth device.
  2. On one speaker, press and hold the TWS button (if available, or refer to specific button on your model).
  3. The speakers will attempt to pair with each other. Once connected, you will hear a confirmation.
  4. Connect your device via Bluetooth to the primary speaker. Audio will now play through both speakers in stereo.



The speaker's versatility is shown with its ability to connect to smartphones and computers for plug-and-play use and music accompaniment.

Maintenance

Proper care and maintenance will extend the life of your JYX PA Speaker System:

- **Cleaning:** Use a soft, dry cloth to clean the exterior of the speaker. Do not use abrasive cleaners, waxes, or solvents.
- **Battery Care:** To preserve battery life, avoid fully discharging the battery frequently. If storing for a long period, charge the battery to about 50% every few months.
- **Storage:** Store the speaker in a cool, dry place away from direct sunlight, extreme temperatures, and high humidity.
- **Avoid Water:** This speaker is not waterproof. Keep it away from water and other liquids to prevent damage.

Troubleshooting

If you encounter any issues with your speaker system, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Speaker does not power on.	Low battery; Power button not pressed correctly.	Charge the speaker fully. Press and hold the power button for a few seconds.
No sound from speaker.	Volume too low; Incorrect input mode; Device not connected.	Increase master volume. Ensure correct input mode (Bluetooth, AUX, USB/TF). Reconnect your device.
Microphones not working.	Microphone battery low; Microphone not paired; Mic volume too low.	Replace microphone batteries. Ensure microphones are powered on and within range. Increase MIC.VOL.
Bluetooth pairing failed.	Speaker not in pairing mode; Device too far; Interference.	Ensure speaker is in Bluetooth pairing mode. Move device closer to speaker. Avoid strong interference sources.
Sound distortion.	Volume too high; Audio source quality poor.	Reduce volume. Try a different audio source or file.

Specifications

Detailed technical specifications for the JYX-MS73 PA Speaker System:

- **Model Number:** JYX-MS73

- **Product Dimensions:** 10.24 x 11.02 x 5.12 inches
- **Item Weight:** 2.2 pounds
- **Battery:** 1 Lithium Polymer battery (included), 5200mAh capacity
- **Speaker Components:** 8-inch subwoofer, 5.25-inch tweeter
- **Connectivity:** Bluetooth, AUX-IN, USB, TF Card, TWS
- **Microphones:** 2 Wireless UHF Microphones
- **Special Features:** LED Disco Lights, Vocal Cut Function, Recording Support
- **Manufacturer:** JYX
- **Color:** Green


Warranty and Support

JYX is committed to providing high-quality products and excellent customer service. Your JYX PA Speaker System comes with comprehensive support:

- **Warranty:** Enjoy a 360-day warranty service from the date of purchase.
- **Technical Support:** Lifetime technical support is provided for your product.
- **US Local After-sales Center:** Access to local support for prompt assistance.

For any questions, issues, or professional assistance, please contact our customer support team:

Email: service@jyxspeaker.com

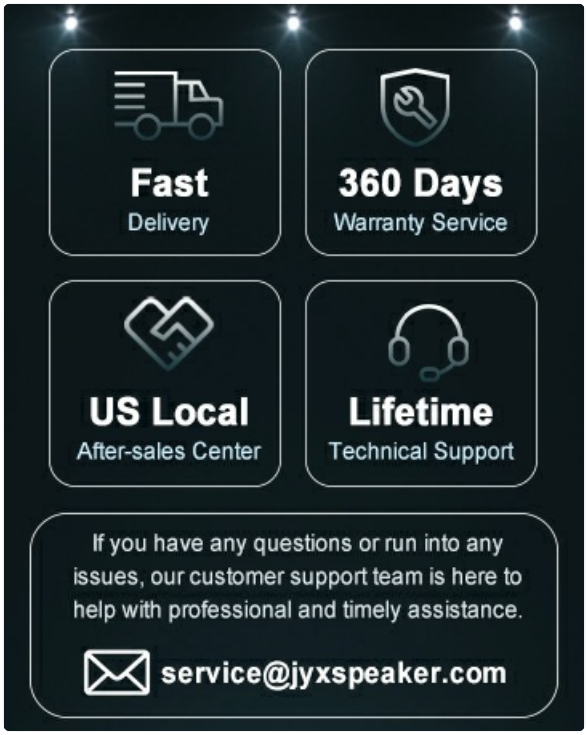

An overview of JYX's customer service commitments, including warranty and technical support.

Product Videos

Currently, there are no official product videos from the seller available for embedding in this manual. Please refer to the product page for any available customer-uploaded videos.

© 2023 JYX. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0DC644NM6

More documents and user manuals: **https://manuals.plus/**