

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [Odokee](#) /
- › [Odokee UE268 Wireless Charging Alarm Clock Radio Instruction Manual](#)

Odokee UE268

Odokee UE268 Wireless Charging Alarm Clock Radio Instruction Manual

Your comprehensive guide to setting up and operating your Odokee UE268 device.

PRODUCT OVERVIEW

The Odokee UE268 is a versatile bedside device combining a digital alarm clock, Qi-certified fast wireless charger, 10W stereo Bluetooth speaker, FM radio, and dimmable nightlight. It is designed to streamline your nightstand with multiple functionalities.

ALL-IN-ONE



Wireless
Charger



10W
Speaker



Alarm
Clock



FM
Radio



Night
Light



Image: The Odokee UE268 device highlighting its multiple integrated features.

Key Features

- **All-in-One Design:** Integrates wireless charging, Bluetooth speaker, FM radio, and nightlight into a single unit.
- **10W Stereo Bluetooth Speaker:** Delivers clear and powerful audio for seamless music streaming.
- **Qi-Certified Fast Wireless Charging:** Provides 10W wireless charging for compatible devices and includes a USB charging port for additional devices.

- **FM Radio:** Access local radio stations with a built-in FM tuner and sleep timer function.
- **Dimmable Digital Display:** Adjustable brightness from 0-100% for personalized comfort.
- **8-Color Nightlight:** Offers adjustable brightness and multiple color options to create a tranquil ambiance.

SETUP GUIDE

Follow these steps to set up your Odokee UE268 device.

1. Power Connection

1. Locate the DC 9V power input port on the back of the device.
2. Connect the provided power adapter to the DC 9V port.
3. Plug the power adapter into a standard wall outlet. The display will illuminate, indicating the device is powered on.

Qi-Certified Wireless & USB Charging



For your charging needs and
keeping your devices powered through the night.

Image: The Odokee UE268 demonstrating both wireless and USB charging capabilities.

2. Radio Antenna

1. Locate the radio antenna wire on the back of the device.
2. Fully extend the antenna for optimal FM radio reception.

Video: An official product video demonstrating the features and design of the Odokee Wireless Charging Alarm Clock Radio.

OPERATING INSTRUCTIONS

1. Setting the Time

1. Press the 'Time Set' button on the back panel.
2. Use the 'AL VOL-' and 'AL VOL+' buttons on the top panel to adjust the hour.
3. Press 'Time Set' again to confirm the hour and move to minutes.
4. Use the 'AL VOL-' and 'AL VOL+' buttons to adjust the minutes.
5. Press 'Time Set' one more time to save the time.
6. To switch between 12-hour and 24-hour format, press the '12H/24H' button on the back panel.

2. Setting the Alarm

1. Press the 'Alarm Set' button on the back panel.
2. Use the 'AL VOL-' and 'AL VOL+' buttons on the top panel to adjust the alarm hour.
3. Press 'Alarm Set' again to confirm the hour and move to alarm minutes.
4. Use the 'AL VOL-' and 'AL VOL+' buttons to adjust the alarm minutes.
5. Press 'Alarm Set' one more time to save the alarm time.
6. To activate or deactivate the alarm, press the 'Alarm On/Off' button (bell icon) on the top panel. A bell icon on the display indicates the alarm is active.
7. When the alarm sounds, press the 'SNOOZE/LIGHT' button to snooze for 9 minutes. To turn off the alarm completely, press the 'Alarm On/Off' button.

3. Wireless and USB Charging

The device features a Qi-certified wireless charging pad on top and a USB-A charging port on the back.

- **Wireless Charging:** Place your Qi-compatible smartphone or earbuds on the 'Qi' symbol on the top surface. Ensure the device is centered for optimal charging. A lightning bolt icon on the display will indicate active charging.
- **USB Charging:** Connect your device's USB cable to the USB port on the back panel to charge.



Image: A close-up of the wireless charging area with a notice about metal objects.

Wireless Charging Notice: Do not place metal phone cases or metal objects in the wireless charging area to prevent interference or damage.

4. Bluetooth Speaker

1. Press the 'BT' button on the top panel to enter Bluetooth pairing mode. The display will show 'BT' and flash.
2. On your smartphone or other Bluetooth-enabled device, search for 'UE268' in the Bluetooth settings.
3. Select 'UE268' to pair. Once connected, the 'BT' indicator on the display will stop flashing.

4. You can now play audio from your device through the Odokee UE268 speaker.
5. Adjust volume using the 'FM/BT Volume' slider on the back panel or your connected device.

5. FM Radio

1. Press the 'Music Note' button on the top panel to switch to FM radio mode.
2. Press and hold the 'Music Note' button to auto-scan and save available FM stations.
3. Use the 'AL VOL-' and 'AL VOL+' buttons to navigate between saved stations.
4. Adjust volume using the 'FM/BT Volume' slider on the back panel.
5. **Sleep Timer:** Press the 'Hourglass' button on the top panel to set a sleep timer (e.g., 15, 30, 60, 90 minutes). The radio will automatically turn off after the set time.

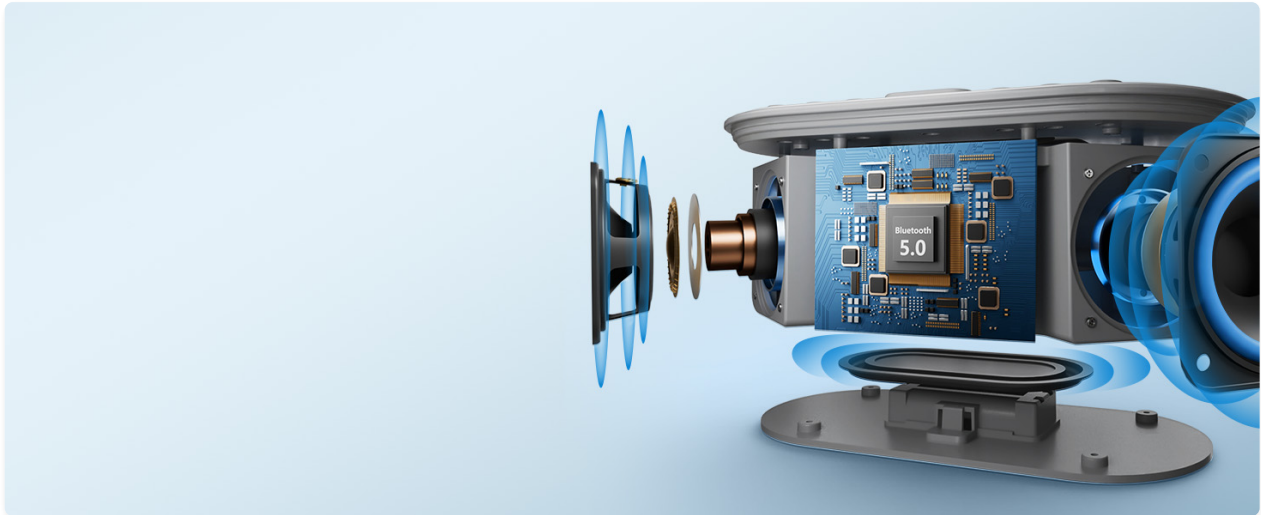


Image: The Odokee UE268 in use, demonstrating its FM radio function.

6. Nightlight and Display Dimmer

- **Nightlight:** Press the 'SNOOZE/LIGHT' button on the top panel to cycle through 8 different nightlight colors. Press and hold to turn the nightlight off.
- **Nightlight Dimmer:** Use the 'Night Light Dimmer' buttons on the back panel to adjust the brightness of the nightlight.
- **Display Dimmer:** Use the 'Display Dimmer' slider on the back panel to adjust the brightness of the digital time display from 0-100%.

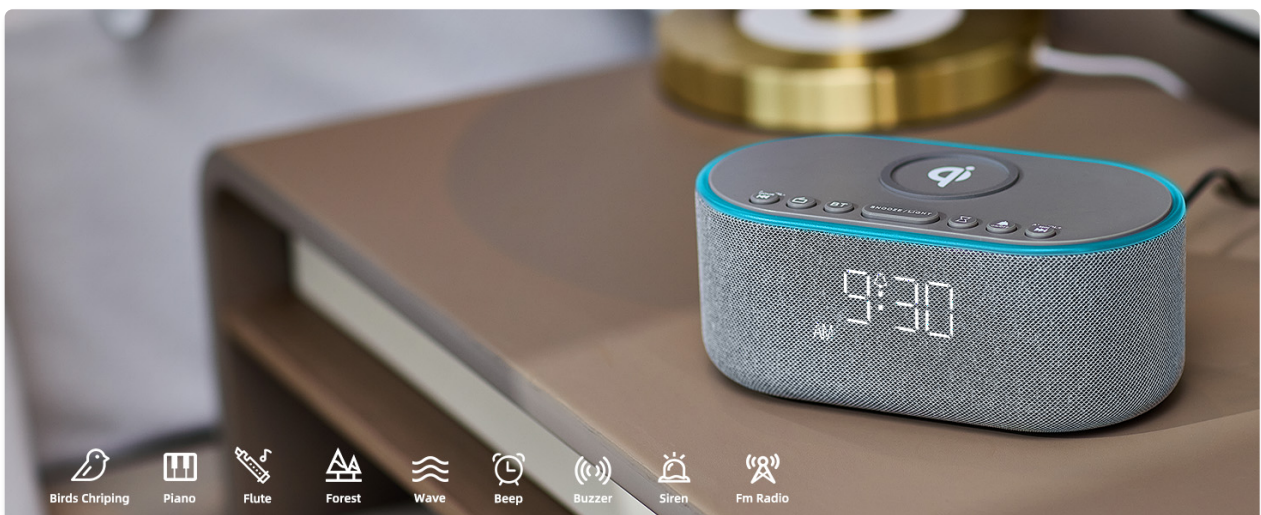


Image: The Odokee UE268 demonstrating its adjustable display brightness.

PRODUCT SPECIFICATIONS

Feature	Specification
Brand	Odokee
Model Number	UE268
Color	Gray
Display Type	Digital
Power Source	Corded (DC 9V)
Wireless Charging Output	10W (Qi Certified)
USB Charging Port	Yes
Bluetooth Version	5.0
Speaker Output	10W Stereo Sound
FM Radio	Yes
Nightlight Colors	8 colors, adjustable brightness
Display Brightness	0-100% Dimmable
Product Dimensions	2.96"W x 7.28"H
Item Weight	1.16 pounds (525 Grams)
Material	Fabric, Plastic

CARE AND MAINTENANCE

- Keep the device dry and away from moisture.
- Clean the device with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- Avoid placing heavy objects on top of the device.
- Ensure proper ventilation around the device to prevent overheating.

TROUBLESHOOTING

1. Device Not Powering On

- Ensure the power adapter is securely connected to both the device and a working wall outlet.
- Verify that the power outlet is functional by plugging in another device.

2. Wireless Charging Not Working

- Ensure your device is Qi-compatible.
- Remove any thick phone cases, metal plates, or magnetic attachments from your phone, as these can

interfere with wireless charging.

- Make sure your device is centered on the Qi charging pad.
- Check if the lightning bolt icon appears on the display, indicating active charging.

3. Digital Clock Display Issues

- If digits appear faulty or incomplete, try unplugging the device for a few minutes and then plugging it back in to reset.
- Adjust the 'Display Dimmer' on the back panel to ensure the brightness is set appropriately for visibility.

4. Alarm Functionality Concerns

- Ensure the 'Alarm On/Off' button (bell icon) is pressed and the bell icon is visible on the display.
- Verify that the alarm time is correctly set.
- Be mindful of the placement of the 'Alarm On/Off' button relative to the 'SNOOZE/LIGHT' button to avoid accidentally turning off the alarm instead of snoozing.

5. Poor FM Radio Reception

- Ensure the radio antenna wire on the back is fully extended.
- Try repositioning the antenna or the device to improve signal reception.

WARRANTY AND SUPPORT

The Odokee UE268 Wireless Charging Alarm Clock Radio comes with an 18-month warranty.

For any product inquiries, technical support, or warranty claims, please contact Odokee customer service through the retailer's platform or the official Odokee website.