

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [MOOKA](#) /

> [MOOKA M01 Air Purifier User Manual](#)

MOOKA M01

MOOKA M01 Air Purifier User Manual

Model: M01

1. SAFETY INFORMATION

Please read all instructions carefully before using the MOOKA M01 Air Purifier. Keep this manual for future reference.

- Ensure the air purifier is placed on a stable, level surface.
- Do not block the air inlet or outlet. Maintain at least 15 cm (6 inches) clearance from walls or other objects.
- Use only the provided USB-C cable for power. The unit operates on 110-240V.
- Do not immerse the unit in water or other liquids.
- Unplug the air purifier before cleaning or performing any maintenance.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- The MOOKA M01 is 100% No-Ozone and does not use UV-C light. It is ETL, FCC, CE, CARB, and DOE Certified.

2. PRODUCT OVERVIEW

The MOOKA M01 Air Purifier is designed to improve air quality in spaces up to 300 sq.ft. It features a multi-layer filtration system and user-friendly controls.

2.1 Components

- Main Air Purifier Unit
- H13 True HEPA Filter (Pre-installed or included)
- USB-C Power Cable
- Fragrance Sponge (located in the top compartment)

2.2 Filtration System

The M01 utilizes a 3-stage filtration system to capture various airborne particles and odors:

1. **Pre-Filter:** Captures large particles such as dust, lint, and pet dander.
2. **H13 True HEPA Filter:** Traps 99.97% of airborne particles 0.3 microns in size, including pollen, dust mites, and smoke particles.
3. **Activated Carbon Filter:** Absorbs odors from pets, cooking, smoke, and volatile organic compounds (VOCs).



Figure 2.2.1: MOOKA M01 Filter Layers

This image illustrates the three distinct layers of the MOOKA M01 air purifier filter: the outer Pre-Filter, the middle H13 HEPA Filter, and the inner Activated Carbon Filter, designed for comprehensive air purification.



Figure 2.2.2: MOOKA M01 with Replacement Filters

The image displays the compact MOOKA M01 air purifier alongside two new replacement H13 HEPA filters, highlighting the essential components for maintaining air quality.

3. SETUP

3.1 Unpacking and Filter Installation

1. Carefully remove the air purifier from its packaging.
2. Turn the unit upside down and twist the base counter-clockwise to unlock and remove the filter cover.
3. Remove the plastic packaging from the H13 True HEPA filter.
4. Insert the filter back into the unit, ensuring it is seated correctly.
5. Replace the filter cover and twist clockwise to lock it securely.

3.2 Placement

Place the air purifier on a firm, level surface. For optimal performance, ensure there is at least 15 cm (6 inches) of space around all sides for proper 360-degree air circulation.

3.3 Power Connection

Connect the provided USB-C cable to the port on the back of the air purifier and plug the other end into a compatible USB power source (e.g., wall adapter, power bank, computer USB port). The unit supports 110-240V input.



Figure 3.3.1: USB-C Power Options

This image demonstrates the versatility of the MOOKA M01 air purifier's USB-C power connection, showing it powered by a laptop, a car charger, and a portable power bank, emphasizing its travel-friendly design.

4. OPERATING INSTRUCTIONS

The MOOKA M01 features a touch control panel on its top surface.



Figure 4.0.1: Control Panel Overview

This detailed diagram highlights the MOOKA M01 air purifier's intuitive touch control panel, clearly labeling functions such as ON/OFF, Night Light, Filter Reset/Child Lock, four fan speed options, and four timer settings.

4.1 Power On/Off

- Touch the **ON/OFF** button to turn the air purifier on or off.

4.2 Fan Speed Adjustment

- Touch the **Fan Speed** icon (looks like a propeller) to cycle through 4 fan speed settings.

4.3 Timer Settings

- Touch the **Timer** button (looks like a clock) to set the operating time for 2, 4, 6, or 8 hours. The unit will automatically turn off after the selected time.

4.4 Night Light

- Touch the **LIGHT** button (looks like a light bulb) to turn the ambient night light on or off.

4.5 Sleep Mode

When the air purifier is set to its lowest fan speed, it operates at a quiet 15 dB. In sleep mode, the on-screen button light will automatically turn off after 10 seconds of no operation to ensure a peaceful

environment.



Figure 4.5.1: Sleep Mode Operation

This image depicts the MOOKA M01 air purifier operating in a bedroom during sleep, highlighting its ultra-quiet 15dB sleep mode, the option to turn off the display lights, and available timer settings (2/4/6/8 hours) for undisturbed rest.

4.6 Child Lock Function

- To activate the Child Lock, press and hold the **RESET** button (looks like a grid) for 3 seconds. The child lock indicator will illuminate.
- To deactivate, press and hold the **RESET** button again for 3 seconds.



Figure 4.6.1: Child/Pet Friendly Features

This image illustrates the MOOKA M01 air purifier's child and pet-friendly design, featuring icons for its Child Lock function and No Ozone emission, ensuring a safe environment for families.

4.7 Adding Fragrances

- Locate the fragrance sponge compartment on the top of the unit.
- Add a few drops of essential oil (not included) onto the sponge.
- Close the compartment. The air purifier will then diffuse the fragrance along with the purified air.

Set It with a Tap

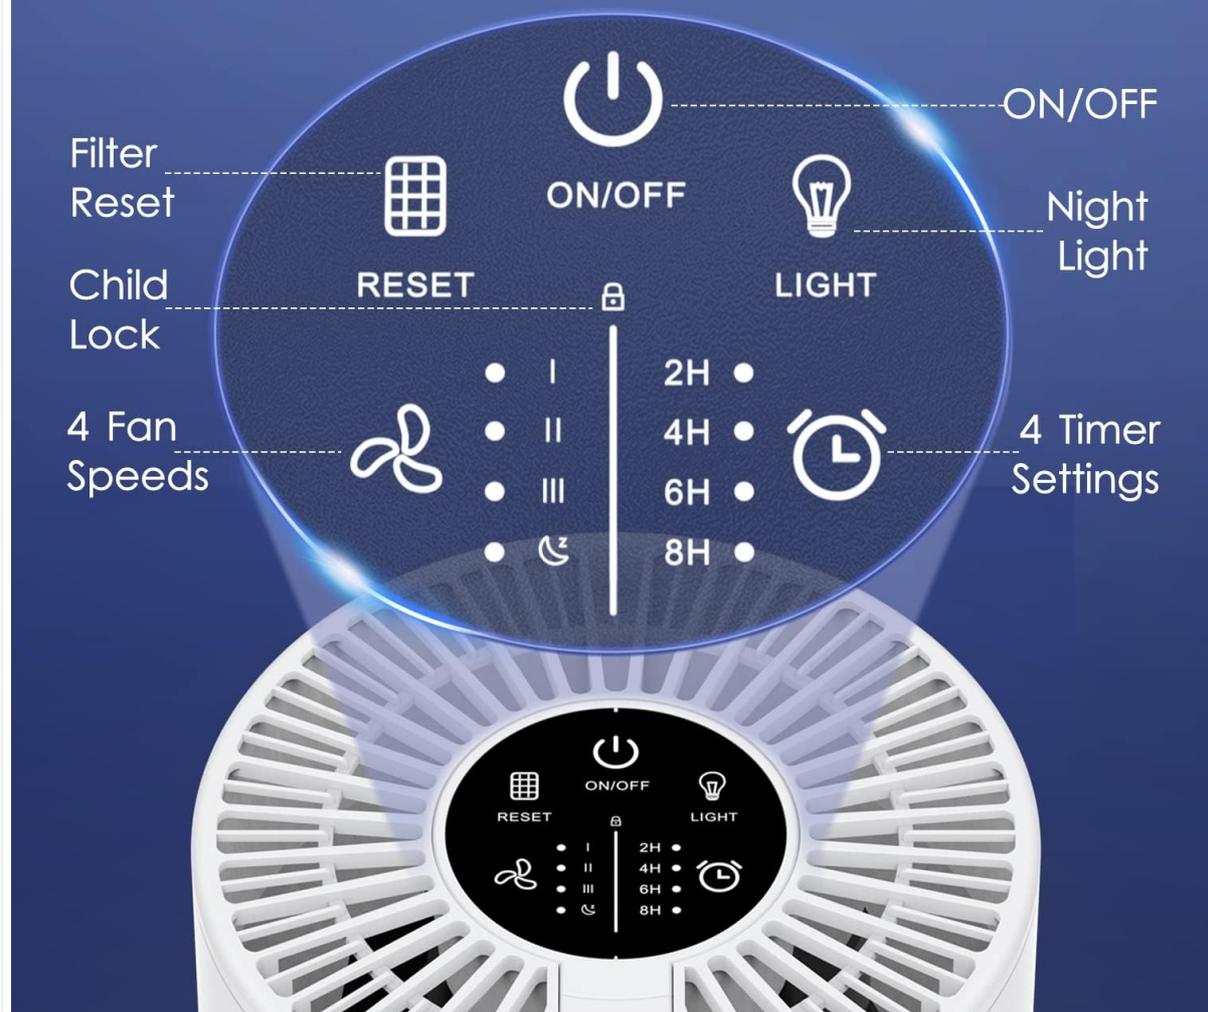


Figure 4.7.1: Adding Fragrances

The image shows a hand carefully adding drops of essential oil into the designated fragrance sponge compartment on the top of the MOOKA M01 air purifier, demonstrating how to use its aromatherapy feature.

5. MAINTENANCE

5.1 Filter Replacement

The M01 air purifier has a filter replacement reminder. The "Reset" light will illuminate after approximately 1440 hours of use (equivalent to 3-6 months, depending on usage and air quality).

1. Unplug the air purifier from the power source.
2. Turn the unit upside down and twist the base counter-clockwise to remove the filter cover.
3. Remove the old filter and dispose of it properly.
4. Insert a new MOOKA M01 replacement filter (ensure plastic packaging is removed).
5. Replace the filter cover and twist clockwise to lock it.
6. Plug the air purifier back in.
7. Press and hold the **RESET** button for 3 seconds to reset the filter life indicator. The "Reset" light will turn off.

5.2 Cleaning the Unit

- Always unplug the unit before cleaning.
- Wipe the exterior of the air purifier with a soft, dry cloth.
- Do not use abrasive cleaners or solvents.
- Periodically vacuum the air inlet and outlet grilles to remove dust buildup.

6. TROUBLESHOOTING

Problem	Possible Cause	Solution
Unit does not turn on.	No power supply.	Ensure the USB-C cable is securely connected to both the unit and a working power source. Try a different USB port or adapter.
Airflow is weak or no air comes out.	Filter is clogged or plastic packaging not removed.	Check if the filter's plastic packaging has been removed. Replace the filter if it is heavily soiled. Ensure air inlets/outlets are not blocked.
"Reset" light is on after filter replacement.	Filter life indicator not reset.	Press and hold the RESET button for 3 seconds to reset the filter life.
Unit makes unusual noise.	Foreign object inside or filter not seated correctly.	Unplug the unit and check for any foreign objects. Ensure the filter is correctly installed and the cover is securely locked.

7. SPECIFICATIONS

Feature	Specification
Model Number	M01
Brand	MOOKA
Filter Type	H13 True HEPA (with Pre-Filter and Activated Carbon)
Coverage Area	Up to 300 sq.ft (28)
Noise Level	15 dB (in Sleep Mode)
Power Source	DC power supply (USB-C), 110-240V compatible
Control Method	Touch Button Control
Contaminant Filtration	Dust, Pollen, Smoke, Pet Dander, Odors, Wildfire Smoke
Special Features	H13 True HEPA Filter, Air Spiral Technology, Travel-Friendly Design, Low Noise Operation, Fragrance Sponge, Child Lock, Night Light, Timer (2/4/6/8H)
Certifications	ETL, FCC, CE, CARB, DOE

8. WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the product packaging or contact MOOKA

customer service directly. Keep your purchase receipt as proof of purchase.