

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Moondrop](#) /

› [Moondrop Block True Wireless Earbuds Instruction Manual](#)

Moondrop BLOCK

Moondrop Block True Wireless Earbuds Instruction Manual

Model: BLOCK

1. INTRODUCTION

Thank you for choosing the Moondrop Block True Wireless Earbuds. These earbuds are designed to provide a high-quality audio experience with advanced features such as a 13mm bass-enhanced dynamic driver, VDSF natural timbre tuning, dual-microphone beamforming ENC, and seamless monaural-binaural switching. This manual will guide you through the setup, operation, and maintenance of your new earbuds.



Image 1.1: Moondrop Block True Wireless Earbuds (Pink) with charging case.

2. PACKAGE CONTENTS

The Moondrop Block package includes the following items:

- Moondrop Block True Wireless Earbuds (Left and Right)
- Wireless Charging Case
- User Manual (this document)

3. SETUP

3.1 Charging the Earbuds and Case

Before first use, fully charge the earbuds and the charging case. The charging case provides approximately 15 hours of additional battery life, while the earbuds offer up to 6 hours on a single charge.

1. Place the earbuds into the charging case. Ensure they are correctly seated in their respective slots.
2. Connect the charging case to a power source using a compatible USB-C cable (not included).
3. The indicator light on the charging case will show the charging status. A full charge typically takes about 1

hour.

3.2 Bluetooth Pairing

Follow these steps to pair your Moondrop Block earbuds with your device:

1. Open the charging case. The earbuds will automatically enter pairing mode, indicated by a flashing light.
2. On your smartphone, tablet, laptop, or smart speaker, navigate to the Bluetooth settings.
3. Search for available devices and select "Moondrop Block" from the list.
4. Once connected, the indicator light on the earbuds will stop flashing, and your device will confirm the connection.



Image 3.1: Moondrop Block earbuds ready for pairing.

4. OPERATING INSTRUCTIONS

4.1 Wearing the Earbuds

The Moondrop Block features a flathead earbud design for a comfortable fit. Gently insert each earbud into your ear canal until it feels secure and comfortable.

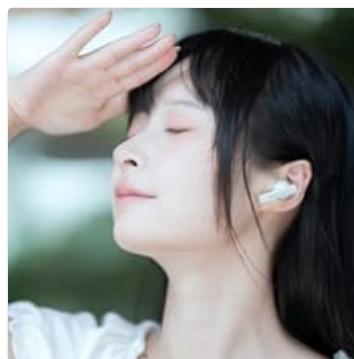


Image 4.1: Proper wearing of the Moondrop Block earbud.

4.2 Touch Controls

The earbuds support touch operations for various functions:

- **Play/Pause:** Single tap on either earbud.
- **Next Track:** Double tap on the right earbud.
- **Previous Track:** Double tap on the left earbud.
- **Answer/End Call:** Single tap on either earbud.
- **Reject Call:** Press and hold on either earbud.
- **Activate Voice Assistant:** Triple tap on either earbud.
- **Mode Switching:** Specific modes (e.g., gaming mode) can be toggled by pressing and holding for a designated duration (refer to specific mode instructions).



Image 4.2: Demonstrating touch operation on the earbud.

4.3 Monaural-Binaural Switching (TWS Mirroring)

The Moondrop Block supports TWS mirroring, allowing seamless switching between using both earbuds (binaural mode) or just one (monaural mode). Simply place one earbud back into the charging case, and the other will continue to function independently.

4.4 Environmental Noise Cancellation (ENC) for Calls

Equipped with dual-microphone beamforming ENC, the earbuds effectively reduce environmental noise during voice calls, ensuring clear communication.



Image 4.3: Dual-microphone beamforming ENC in action.

4.5 Low-Latency Gaming Mode

For an optimized gaming experience, the Moondrop Block features a low-latency gaming mode (55ms). Activate this mode via touch control (refer to specific mode switching instructions) to minimize audio delay during gameplay.



Image 4.4: Earbuds used for gaming with low latency.

5. MAINTENANCE

Proper maintenance ensures the longevity and optimal performance of your earbuds.

- **Cleaning:** Regularly clean the earbuds and charging case with a soft, dry, lint-free cloth. Do not use harsh chemicals or abrasive materials.
- **Storage:** When not in use, store the earbuds in their charging case to protect them from dust and damage.
- **Avoid Moisture:** Keep the earbuds and case away from water, humidity, and extreme temperatures.
- **Charging Contacts:** Ensure the charging contacts on both the earbuds and the case are clean and free of debris to maintain a reliable connection.

6. TROUBLESHOOTING

If you encounter any issues with your Moondrop Block earbuds, refer to the following common solutions:

Problem	Solution
Earbuds not pairing	Ensure earbuds are charged. Turn off and on your device's Bluetooth. Forget "Moondrop Block" in your device's Bluetooth settings and re-pair. Reset the earbuds (refer to manufacturer's website for specific reset instructions if needed).
No sound from one earbud	Ensure both earbuds are charged. Place both earbuds back into the case, close it, then reopen to re-establish connection. Check device audio balance settings.
Charging issue	Ensure the charging cable is securely connected. Try a different USB-C cable and power adapter. Clean the charging contacts on the earbuds and case.
Poor call quality	Ensure earbuds are fully charged. Check for obstructions near the microphones. Move closer to your connected device to improve Bluetooth signal.

7. SPECIFICATIONS



Detailed technical specifications for the Moondrop Block True Wireless Earbuds:

- **Model Name:** BLOCK
- **Form Factor:** True Wireless
- **Ear Placement:** In Ear (Flathead design)
- **Connectivity Technology:** Wireless (Bluetooth)
- **Bluetooth Version:** 5.4
- **Bluetooth Range:** 10 meters
- **Audio Driver Type:** Dynamic Driver
- **Audio Driver Size:** 13 Millimeters
- **Diaphragm Material:** Composite Biological Diaphragm
- **Frequency Range:** 20 Hz - 20,000 Hz
- **Battery Life (Earbuds):** 6 Hours
- **Battery Life (with Charging Case):** 6 + 15 Hours (Total 21 Hours)
- **Charging Time:** 1 Hour
- **Control Method:** Touch
- **Special Features:** Dual-Microphone Beamforming ENC, VDSF Natural Timbre Tuning, B&K5128 Tuning, Low-Latency Game Mode (55ms), TWS Mirroring
- **Compatible Devices:** Smartphones, Laptops, Tablets, Smart Speakers
- **Included Components:** Wireless Charging Case
- **Item Weight:** 2.89 ounces
- **Package Dimensions:** 2.92 x 2.48 x 2.05 inches

8. WARRANTY AND SUPPORT

Moondrop products are manufactured to high-quality standards. For warranty information, technical support, or service inquiries, please refer to the warranty card included with your purchase or visit the official Moondrop website. Please retain your proof of purchase for warranty claims.


Related Documents - BLOCK

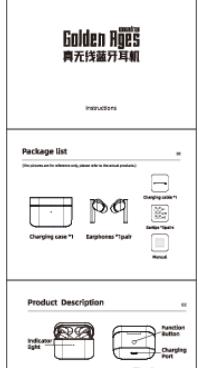 <p>NEKOCAKE True Wireless Stereo</p> <p>Introduction</p>	<p>Nekocake True Wireless Stereo Earbuds User Manual</p> <p>Comprehensive user manual for the Nekocake True Wireless Stereo Earbuds by Moondrop, covering introduction, packing list, product description, connection, usage, functions, specifications, and safety instructions.</p>
 <p>Golden Ages True Wireless Stereo Earbuds</p> <p>INSTRUCTIONS</p> <p>Package List</p> <p>Product Description</p>	

<p> Touch Zone 0 0 — Charging contact</p> <p><small>It is not recommended to open and close charging case too frequently for safety usage. It is not recommended to open and close charging case too frequently for safety usage.</small></p>
<p>Connection </p> <p>Connecting with new device</p> <p>1.Put the earphones into charging case and keep the lid open. 2.Long press the function button on the charging case for 3 seconds until the green light is on and the orange light is off. 3.The earphones will turn on automatically and the earphones will flash 7 times means the action is finished. 4.Keep the earphones in the charging case, after the action is finished, click the "Golden Ages" on the ear for pairing.</p> <p><small>*When first time using the Headphone Bluetooth QD-191, before the earphones in the charging case, click the lid, connect the QD-191 charging cable, and charge the earphones.</small></p>
<p>Connection </p> <p>Automatically connection</p> <p>When the earphone is turned on, it will automatically connect. If the connected device which has disconnected pairing record, it'll be connected.</p> <p>Out of distance disconnection and auto reconnection</p> <p>When the device is connected with earphones, if it's disconnected, the earphones will automatically connect to the device again. If the earphones are disconnected, the earphones will try connect back to the device within 3 minutes when it is in connection range.</p> <p><small>*If the earphones cannot be automatically connected to the device, please turn on the ear manually connect in the Bluetooth list of the device.</small></p>
<p>Connection </p> <p>Disconnect the current connected device</p> <p>When it is on: 1.Put the earphones are in the charging case and keep the charging case lid open. Pressing the function button on the earphone for 3 seconds until the green light is off and the orange light is on, then the earphones will disconnect from the current device and end the pairing mode. When it is off: 1.Put the earphones are in the charging case for 3 seconds, then it'll disconnect current device and enter pairing mode.</p> <p>Keyboard Golden Ages, Horn, Blanknote paired 30.</p>
<p>Connection </p> <p>Put the earphones back to charging case and keep the charging case lid open. Pressing the function button on the earphone for 3 seconds to clear pairing information and enter into pairing mode. When the earphones are in the charging case and the earphone is successful (the orange light will not turn on).</p> <p><small>*Due to the connection characteristics of Bluetooth signal, if the connection distance is too far or the connection environment is too noisy, there may be occasional disconnection or no signal.</small></p>
<p>Usage </p> <p>Charging</p> <p>Put the earphones in the charging case and it will automatically start charging. *When the battery of charging case is more than 10%, the green light will be always on until the earphones is fully charged. *When the battery of charging case is lower than 10%, the orange light will be always on until the earphones is fully charged or the case is out of power.</p> <p>Charging the case</p> <p>Put it in the charging case. The earphone light will be flashing when in charging.</p>
<p>Usage </p> <p>The green light will be flashing for 1 seconds after the case is fully charged then pause.</p> <p>Check battery</p> <p>To check the battery of the charging case, press the function button on the charging case. The light will change with deducted battery. Battery full: green light is more than 10% Orange Light (The battery is less than 10% Low battery: red light</p> <p>Low battery warning for charging case</p> <p>Once the light of the charging case is red, then press the function button, the orange light will flash 10 times.</p>
<p>Usage </p> <p>Note connecting mode matching</p> <p>Turn on the earphones and long press one side of earphone for 3 seconds until the green light is on, then the earphones will connect to the device (the connecting icon will appear within 3 seconds to indicate the earphones successfully).</p>
<p>Function </p> <p>Operation</p> <p>1. Long press the "Golden Ages" button for 3 seconds, and click the "Golden Ages" button again to turn on the earphones. The earphones require to pairing with the "Golden Ages" device.</p> <p> Touch Zone</p> <p>2. Long press the "Golden Ages" button for 3 seconds, and click the "Golden Ages" button again to turn on the earphones. The earphones require to pairing with the "Golden Ages" device.</p> <p><small>*Please note that the earphones can only be paired with the "Golden Ages" device.</small></p>
<p>Product Specifications </p> <p>Product Model: Golden Ages Bluetooth Version: 5.0 Code: S87AAC-CC123456 Antenna: Internal Bluetooth Version: A2DP/AVRCP/HFP/HSP Bluetooth Range: 10 meters (Open environment) Speaker: 10mm dynamic speaker</p> <p><small>*Please use the proper inductive charger that the device input which indicated in the manual (9V - 1A).</small></p>
<p>Security Instructions </p> <p>Please read this important security instructions before using the equipment. This information contains general safety information. Some of the information may not apply to your device. Please follow the instructions to help protect you from personal or others or damage to your equipment.</p> <p>Warning</p> <p>Failure to comply with safety warnings and regulations would result in serious injury or death. Do not drop the device or plug or power socket. Do not expose the device to water or liquid power socket. Unterminated connections can cause electric leakage or fire. Do not use wet hands or other wet body parts to touch.</p>
<p>Security Instructions </p> <p>Touch the device, power cord, plug or power socket, otherwise it may cause electric shock. When using the power cord, do not use too much force, otherwise it may cause electric shock, or it may damage the power cord. Do not damage the power cord, otherwise it may damage the power cord. Do not expose the device with wet hands while it is charging. Do not directly connect the positive and negative terminals of the battery, otherwise, it may cause a fire or cause serious injury. Do not use the device in the rain, otherwise it may damage the device. Otherwise it may cause electric shock or equipment failure. Use batteries, chargers, accessories and supplies approved.</p>
<p>Security Instructions </p> <p>By the manufacturer</p> <p>1. Do not use accessories or chargers that do not fit the earphones, otherwise it may damage the earphones or earbuds. They may also damage the earphones or earbuds. *Only use chargers and data cables specially designed for this device. Using other chargers and data cables may damage the earphones or earbuds. *Chargers and data cables may cause danger or damage the earphones or earbuds. *When customers use accessories or supplies not approved by MONDAYS, it is not responsible for the consequences. *Do not put the device in the microwave or heating on the wall. *Do not leave home if may damage the device, might cause explosion.</p>
<p>Security Instructions </p> <p><small>*If you fall or fall, you may be injured. Do not drop the device or subject it to strong impact. Otherwise it may damage the earphones or earbuds, leave the device to fall to work normally, or shorten the device life.</small></p>

	<p>MOONDROP MD-TWS-040 FCC Part 15 Subpart C Test Report - Wireless Earphones</p> <p>Official FCC Part 15 Subpart C test report for the MOONDROP MD-TWS-040 wireless earphones, detailing conducted and radiated emissions, output power, spectral density, bandwidth, and antenna requirements.</p>
	<p>MOONDROP PILL Ear-clip Earbuds User Manual</p> <p>Comprehensive user manual for the MOONDROP PILL Ear-clip Earbuds (Model: MD-OWS-003), detailing setup, functions, specifications, safety precautions, and FCC compliance information.</p>
	<p>Moondrop Aria 2 Hi-Fi In-ear Monitors User Manual</p> <p>User manual for the Moondrop Aria 2 Full-scene HiFi In-ear Monitors, covering how to wear, storage, notices, and after-sales terms.</p>
	<p>MOONDROP MIAD Mobile Internet Audio Device User Manual</p> <p>User manual for the MOONDROP MIAD Mobile Internet Audio Device, covering setup, operation, safety, and warranty information.</p>

Documents - Moondrop – BLOCK

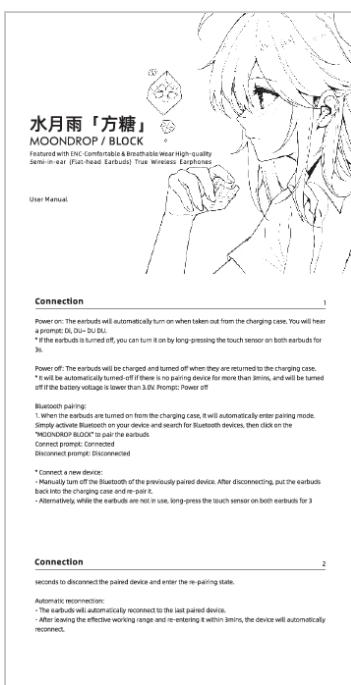

Function 3

Play/pause: click the left/right earbuds
Previous/Next: double-click the left earbud for the previous song / double-click the right earbud for the next song
Answer/ending up: click the left/right earbud
Decline: long press the left/right ear for 1.5s
Call forwarding: click the left/right earbud
Call transfer: click the left/right earbud
Voice Assistant: click the left/right earbud for 3 times
Music/game mode switching: click the left/right earbuds for 4 times

Charging:
Charging: the orange light keeps on
Battery indicator: orange light keeps on, and disappears when it's fully charged.
Low battery prompt: orange light flashes

Restore factory settings:
when the earbuds is not connected, long press the left and right earphone 6s at the same time to clear the pairing information and reset.

Product Specifications 4

Product Name: MOONDROP BLOCK High-quality Semi-in-ear (Flat-head Earbuds)
True Wireless Earbuds
Model: MD-TWS-030
Bluetooth Version: 5.4
Bluetooth Profile: A2DP/AVRC/TFP/HFP/HSP
Codecs: AAC/MP3
Charging Port: USB-C
Working Distance: 10m (Unobstructed open environment)
Support System: Bluetooth devices and mobile phones
Emergency Charging Time: About 1 hour
Charging Time (single earbud): About 1.5 hours
Earphone Battery Capacity: 3 mAh/300mAh
Battery Capacity of Charging Case: 3.7V/3000mAh
Battery Life Of Earphone: About 6 hours (AAC)
Battery Life Of Charging Case: About 15 hours (AAC)

Security Instructions 5

Please read this important security instructions before using the equipment. This information contains general safety information applicable to this device and may include content not applicable to this device. Please follow the warnings and cautions to avoid injury to yourself or others or damage to your equipment.

warning
Failure to comply with safety instructions and regulations would result in serious injury or death.
Do not use the device near flammable or explosive material.
Unsafe connection can cause electric leakage or fire.
Do not use wet hands or other wet body parts to touch.
Touch the power cord, plug or other parts of the device with wet hands, it may cause electric shock.
when charging the power cord, do not use too much force, otherwise it may cause electric shock or fire.
Do not bend or damage the power cord, otherwise it may cause electric leakage or fire.
Do not operate the device with wet hands while it is charging, otherwise it may cause electric shock.
Do not directly connect the positive and negative terminals of the charger together, otherwise it may cause a fire or cause serious injury.
Do not use the device outdoors during a thunderstorm, otherwise it may cause electric equipment failure.
Use batteries, chargers, accessories and supplies approved by the manufacturer.

Security Instructions 6

Using universal batteries or chargers may shorten the life of the battery or cause the device to malfunction. They may also cause a fire or cause the battery to explode.
Only use the original MOONDROP earbuds and charging case. Using incompatible chargers and data cables may cause danger or damage the device.
When customers use accessories or supplies not approved by MOONDROP/MOONDROP is not responsible for any damage or injury.
Do not put the device in the back pocket or hang it on the waist.
Excessive force may damage the device, might cause explode or fire.
If you feel uncomfortable, stop using the device.
Do not drop the device or subject it to strong impact.
Otherwise, it may damage the device or battery, cause the device to fail to work normally, or shorten the service life of the device.
It may also cause overheating, burning or other dangers.
Handle and store the equipment and chargers carefully.
Do not drop the device or subject it to strong impact.
Do not place batteries or devices in or on heating devices (such as microwave ovens, ovens, or radiators). The device may explode if overheated.
When displaying the device or device, please comply with local regulations.
Do not touch the device or place the device.
Do not subject the device to extreme high voltage, otherwise it may cause internal short circuit and damage the device.

Security Instructions 7

overheating.
Protect equipment, batteries and chargers from damage.
Avoid exposing the device and battery to extremely cold or extremely hot temperatures.
Extreme temperature can damage the device, reduce the charging capacity of the device, and shorten the service life of the device.
Do not use the data cable with the skin peeled off or damaged, and the charger with damaged or not working properly.
Do not place the device near or in water heaters, microwave ovens, hot cooking equipment, or high-pressure containers.
The battery may leak.
The device may overheat and cause a fire.
Do not use or store the device in areas where dust or median materials are concentrated.
Dust or foreign objects may cause device damaged, fire or electric shock.
Please do not use the device in areas where there is a risk of fire or explosion or the risk of damage from contacting conductive materials such as liquid, dust, metal powder or pencil lead.
Do not touch with sharp tools.Charger socket, do not bump the charger socket.

Conductive materials may short-circuit or corrode the contacts, which may cause explosion or fire.
When using a wireless charger, do not place metal objects, magnets, and magnetic stripe cards between the device and the wireless charger.

Security Instructions 8

The device may not charge properly or may overheat.
Do not bite or suck the device or battery.
Otherwise, it may damage the device or cause an explosion or fire.
Children should not use the device or charge it by themselves.
When children use this device, please make sure they use it correctly.
Do not place the device or its accessories into your eyes, ears or mouth, otherwise it may cause serious injury or damage.
Do not use damaged or leaking batteries. For safe disposal of batteries, please contact the nearest authorized service center.
The iron powder in the earbuds (sold separately) contain magnets. The American Heart Association and the British Medicines and Health Products Administration also warned that magnets will affect implanted in pacemakers, heart rhythm converters, defibrillators, insulin pumps or other electronic medical devices. (These devices are often referred to as "medical devices" with a 1500+ catalog. If any of these medical devices, please do not use this device and consult a doctor (or a medical professional) before consulting a doctor.)
Note:
Failure to comply with safety precautions and regulations can lead to personal injury or property damage.
Do not use the device near other electronic devices
Most electronic devices use radio frequency signals. Your device may interfere with other electronic

Security Instructions 9

device.
Equipment with certain parts particularly susceptible to interference.
Do not use your device in places that may be interfered by radio frequency such as hospitals, airplanes or cars.
If possible, do not use the device beyond 32cm of the pacemaker to avoid interference with the pacemaker.
In order to minimize the interference of the device to the pacemaker, please use the device on the side of opposite to the pacemaker.
If you use a hearing aid or cochlear implants, please contact the medical equipment manufacturer before using this device to determine whether it will be affected by the radio frequency emitted by this device.
During air flight, the use of electronic equipment will interfere with the airplane's electronic navigation.
Follow the instructions of the airline and the instructions of the flight crew. If the equipment is allowed, please always use the flight mode.
The electronic equipment of the car may malfunction due to radio interference from the equipment.
Please do not use the device in places that may be interfered by radio frequency such as hospitals, airplanes or cars.
Do not place the device in a place with dense smoke or fog.
Otherwise, the surface of the device may be damaged and the device may malfunction.
If you use hearing aids and cochlear implants, please contact the manufacturer for information about radio frequency interference.
The radio frequencies emitted by this device may interfere with certain hearing aids and cochlear implants. Before using this equipment, please contact the manufacturer to determine whether the equipment will be affected by the radio frequency emitted by this device.

Security Instructions 10

equipment will be affected by the radio frequencies emitted by this equipment.
Do not use the device near radio frequency devices or instruments (such as audio systems or radio antenna towers).
Radio frequency may cause device malfunction.
Turn off the device in a potentially explosive environment.
Always operate in accordance with regulations, instructions and signs in an explosive environment.
Do not use the equipment in gas stations or near flammable materials, chemical agents and explosive areas.
Do not store or carry flammable liquids, gases or explosive materials in boxes containing device or accessories.
If any part of the device is damaged, smokes, or smells of burning things, please stop using the device immediately. The equipment can not be reused until being repaired by the MOONDROP Service Center.

[pdf] User Manual Guide

2 moond Manual Guide Download MOONDROP Official Website 67452d81af95dc031e9cbefc
cdn prod website files 627128d862c9a44234848dda BLOCK V5 4 Bluetooth True Wireless TWS
EarbudsDownloads Concept Kartv1allorders conceptkart co in dashboard USER MANUALcdn ||| |||

...

lang: score:24 filesize: 5.68 M page_count: 1 document date: 2024-08-13

Bottom edge near the center - head and neck
If the device emits smoke or the smell of burning things, it may cause the battery to explode or burn.
Please observe all safety warnings and regulations regarding the use of equipment while driving.
Driving safely is your primary responsibility while driving. If prohibited by law, please do not use the device while driving. For the safety of you and others, please follow the safety warnings and relevant regulations and remember the following tips:
Put the equipment in an easy-to-access location. You need to look away from the road to get the

Security Instructions 11
warning labels.
In rainy, cold, damp, snow, ice and heavy traffic can cause danger.
Do not record voice memo. Recording a language memo while driving prevents you from focusing on the driving.
According to the traffic situation, decide whether to answer the call reasonably. Answer calls when not moving forward or in traffic jams. Try to call after parking.
Do not have nervous or excited conversations to avoid distraction. Please let the caller know that you are driving.
Properly maintain and use equipment.
Keep the device dry.
Moisture and liquid can damage equipment parts or circuits.
Do not turn on the device when it is wet. If the device is turned on, turn it off if the device cannot be turned off. Turn off the device (the status quo), then dry the equipment with a towel and contact the local MOONDROP service center.
Water damage to the equipment will invalidate the manufacturer's warranty if this equipment is used without proper protection.
The device should be stored on a flat ground. If the device falls, it will be damaged.
The device can be used where the atmospheric temperature is between 0°C and 35°C. You can store the device where the ambient temperature is between -20°C and 50°C. Using or storing the device outside

Security Instructions 12
the recommended temperature range may cause damage to the device or shorten battery life.
Do not store the device in extremely hot areas, such as in a car in summer, otherwise, the equipment may be damaged or the battery may explode.
Do not store the device in extremely cold areas for a long time, such as on the dashboard of a car. Do not store the device with metal objects such as coins, keys and necklaces.
The device may be scratched or malfunction.
If the device is exposed to high temperatures or metal objects, it may cause a fire.
Do not store the device near magnetic fields.
When exposed to a magnetic field, the device may malfunction and the battery may discharge.
Magnetic fields from power lines, electrical equipment, cars, trains and building walls may be damaged by magnetic fields. Avoid contact with the device when it is overheated. Otherwise it may cause low temperature burns, redness and skin pigmentation.
After using the device for a long time, pay attention to the heating of the device and avoid contact with the skin for too long.
Do not sit on the device, or keep in direct contact with your skin for a long time while the device is charged.
High temperature resistance varies from person to person. Please pay special attention when using it by children, the elderly/Protect hearing and ears when using earplugs.
Excessive exposure to strong sounds can cause hearing loss.
Contact with strong sounds on the walking may distract you and cause accidents.

Security Instructions 13
Always turn down the volume before using earplugs, and use only the lowest volume required to listen to conversations.
If there are foreign objects on the earplugs, do not wear the earplugs for a long time, it may cause ear infections. Please keep the earplugs dry and clean.
In a dry environment, static electricity may accumulate in the earplugs. Avoid using the earplugs in a dry environment. Please touch the earplugs to discharge static electricity before using the earplugs.
Do not use headphones while driving or riding a horse. Otherwise, it may distract you and cause accidents. Depending on your area, this may also be illegal.
Precautions when using headphones.
Always pay attention to your surroundings to avoid harming yourself or others.
Do not paint or paint paper on the equipment.
If you paint or paint paper on the metal parts of the device, it may cause itching, eczema or swelling of the skin. When this adverse reaction occurs, please stop using the device and consult a doctor.
Install the device carefully.
Do not place equipment and accessories in or near the airbag deployment area. If the equipment is improperly placed, the airbag inflates rapidly, which can cause serious injury.
Do not touch the device with your hands.
The device may be damaged or malfunction.
If the device is bent or deformed, it may damage the equipment or cause parts malfunction.

Security Instructions 14
Ensure the longest service life of the battery and charger.
If the battery is not used for a long time, the battery may malfunction.
The equipment will discharge if left unused for a long time, and must be recharged before use, when the equipment is not used for a long time.
The battery can only be used for the designated purpose.
Follow all the instructions in this manual to ensure the longest service life of the device and battery.
The manufacturer will not provide warranty for damage or poor performance caused by failure to follow the warnings.
The equipment may wear out over time. Although some parts and repairs are guaranteed during the warranty period, damage or deformation caused by the use of unapproved accessories is not covered by the warranty.
Do not disassemble, modify or repair the device.
Any damage or modification made to the equipment will cause the manufacturer to not guarantee the equipment. If necessary, please contact your local MOONDROP authorized dealer.
Do not dismantle or repair the battery.
When cleaning the device, please follow the following advice:
Use a soft and dry cloth to wipe the device, use a brush or other tools to remove the earwax or dirt on the exterior.
Clean the battery contacts with a dry cloth.

Security Instructions 15
Do not use chemicals or cleaning agents. Otherwise, the surface of the equipment may be discolored or corroded, and it may also cause electric shock or fire.
Please do not use the device in places where there are strong acids, alkalis, and chemical products (such as cosmetics, embalming sprays, hand sanitizers, detergents and insecticides). Otherwise, the internal and external parts of the device may be damaged, or the performance may deteriorate. If the device comes into contact with any of the above-mentioned substances, please wipe it with a soft, dry cloth.
Do not use the device for any purpose other than the designated purpose.
Avoid disturbing others when using the device in public places.
Only qualified personnel are allowed to repair the device.
If the device is damaged by unqualified personnel, the equipment may be damaged and the warranty will not be provided.
Do not distribute copyrighted content.
Do not copy or distribute copyrighted content without the permission of the content owner. This behavior violated copyright law. The manufacturer is not responsible for any legal problems caused by any illegal actions by users against copyrighted content.
Disclaimer:
All content and services available through this device belong to third parties and are protected by copyright, patent, trademarks and other intellectual property laws. Such content and services



Security Instructions 16
are only for personal non-commercial use. Without the permission of the content owner or service provider, you may not be able to use any content or service. In addition to the above restrictions, unless you have the explicit permission of the application content or service provider, you may not be able to modify, copy, republish, upload, post, transmit, translate, or reprint, any content or service provided through this device.亦, create new derivative works, derive or distribute in any way.
Third-party content and services are provided. For any purpose, MOONDROP Company does not provide any guarantee for the content or services provided by third parties. The user of the device expressly declares that it does not assume any implicit guarantees. Or through regulations, common law, or other means (including but not limited to marketability or applicability for specific purpose), the user of the device does not assume any responsibility for the content or service provided through this device. Even if it has been notified in advance that there is a possibility of such damage, whether it is in contract or tort, any direct, indirect, accidental, special, incidental or consequential damage, including but not limited to damage to property, any resulting for other losses or damages, or connecting any information contained, or the results caused to you or any third party using any content or service, MOONDROP Co. does not guarantee that the content or service provided by third parties is error-free.
Third-party services may be stopped or interrupted at any time, and MOONDROP Co. is not responsible or guarantees for any content or the time period during which the service is available. The content and services are transmitted by third parties through networks and

Security Instructions 17
transmission equipment outside the control of MOONDROP in addition to the generality of the exemption clause, MOONDROP also expressly stated that it does not assume any responsibility or obligation for any content or service provided by third parties.
MOONDROP Co. has neither warranty nor obligation for any content or service provided by the content and service providers.

Security Instructions 18
Content of hazardous substances in products

Name	Hazardous substances and elements					
	Lead (Pb) (mg/kg)	Mercury (Hg) (mg/kg)	Chromium(IV) (mg/kg)	nickel(IV) (mg/kg)	Polybrominated biphenyls (BB)	Poly (Azo) dyes
Overall components	X	0	0	0	0	0
Metal parts	0	0	0	0	0	0
Glass	0	0	0	0	0	0
Speaker	0	0	0	0	0	0
Battery	X	0	0	0	0	0

This form is compiled in accordance with SJ/T11344.
0: Indicates that the amount of the hazardous substance in all homogeneous materials

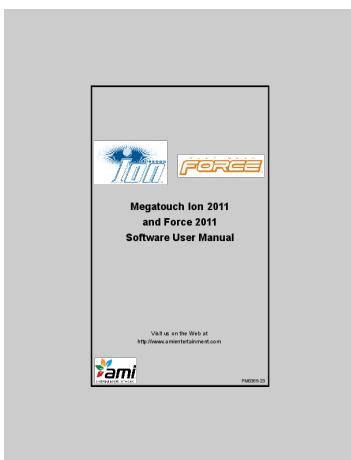


[\[pdf\]](#) User Manual

PM0355 23 Force and Ion 2011 Software User Manual pmd lkab Megatouch Manuals Repair Help
Technical Support meritgames Center manuals 80 |||

Megatouch Ion 2011 and Force 2011 Software User Manual Visit us on the Web at <http://www.ariantertai...> ed on this screen with the up and down arrows. The currency amount will apply to each 15minute time **block** selected by the customer.

lang:en score:17 filesize: 2.97 M page_count: 48 document date: 2010-08-03

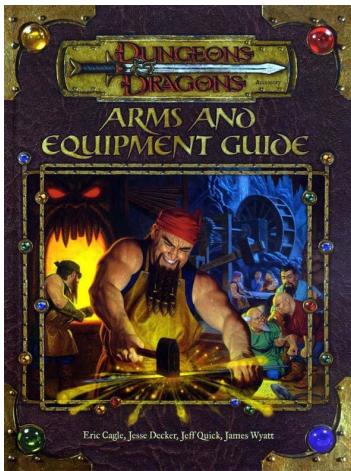

[\[pdf\]](#) Guide

Arms and Equipment Guide D 3e Cagle Decker Quick Redman Wyatt Eric And the eye eu public Books
rpg rem uz Dungeons Dragons 3 5

CONTENTS

CONTENTS	Cost of Hirelings.	61
----------	----------------------------	----

Adventure ... lacks rigging, this statistic is omitted. For dirigibles, the rigging statistic represents the durability of the balloon. The damage dealt by the vehicle if it r...

lang:en score:15 filesize: 2.71 M page_count: 161 document date: 2007-05-24



[pdf] User Manual Owner's Manual

PM0636 14 Ion Standard and Widescreen Aurora 2K11 UNRELEASED pmd lkalb megatouch ion aurora
ws touchscreen video game operators service manual merit ami entertainment bmigaming Games
Manuals 80

To Purchase This Item, Visit BMI Gaming www.bmigaming.com 800 746-2255
1.561.391.7200 Ion A ... ed on this screen with the up and down arrows. The currency
amount will apply to each 15minute time **block** selected by the customer. FIGURE 5 -
COINLESS COIN-OP MENU SETTINGS SCREEN FIGURE 4 - PLAYER...

lang:en score:15 filesize: 1.05 M page_count: 59 document date: 2013-03-15




[\[pdf\] User Manual Owner's Manual](#)

PM0636 14 Ion Standard and Widescreen Aurora 2K11 UNRELEASED pmd lkalb megatouch ion aurora touchscreen video game operators service manual merit ami entertainment bmigaming Games Manuals 80

To Purchase This Item, Visit BMI Gaming www.bmigaming.com 800 746-2255 1.561.391.7200 Ion A ... ed on this screen with the up and down arrows. The currency amount will apply to each 15minute time **block** selected by the customer. FIGURE 5 - COINLESS COIN-OP MENU SETTINGS SCREEN FIGURE 4 - PLAYER...


lang:en score:14 filesize: 1.07 M page_count: 67 document date: 2013-03-14

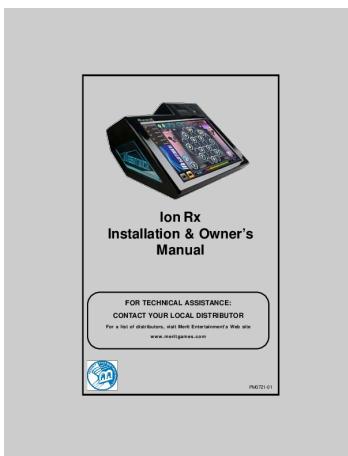

[Ion Rx Installation & Owner's Manual - Merit Entertainment](#)

Comprehensive installation and owner's manual for the Merit Entertainment Ion Rx Megatouch gaming system. Covers setup, maintenance, software configuration, troubleshooting, and warranty information.

lang:en score:14 filesize: 1.2 M page_count: 56 document date: 2008-12-11

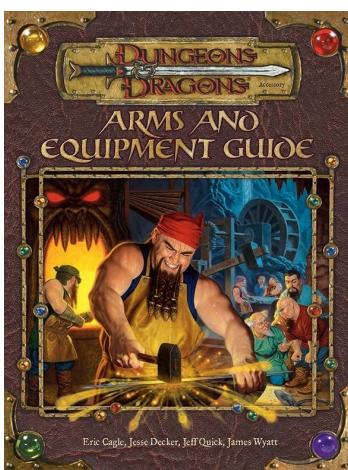


[\[pdf\] Guide Catalog](#)

Arms and Equipment Guide D 3e Cagle Decker Quick Redman Wyatt Eric the eye eu public Books rpg rem uz Dungeons Dragons 3rd Edition 3 0e Core

Arms and equipment guideTM Credits Designers: ERIC CAGLE, JESSE DECKER, JEFF QUICK, AND JAMES WYATT ... lacks rigging, this statistic is omitted. For dirigibles, the rigging sta- THE VEHICLE STATISTICS **BLOCK** tistic represents the durability of the balloon. Ram: The damage dealt by the vehicle if it r...


lang:en score:14 filesize: 3.03 M page_count: 162 document date: 2016-05-30

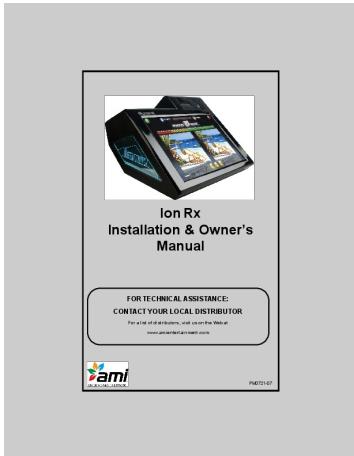

[AMI Ion Rx Installation and Owner's Manual](#)

Comprehensive guide for installing, operating, and maintaining the AMI Ion Rx amusement game machine. Covers setup, troubleshooting, and software configuration for optimal performance.

lang:en score:14 filesize: 3.47 M page_count: 64 document date: 2010-08-03

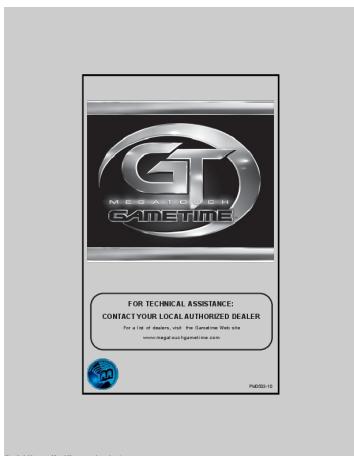

[Merit Megatouch Gametime Owner's Manual](#)

Comprehensive owner's manual for the Merit Megatouch Gametime video game machine, covering setup, operation, maintenance, troubleshooting, and software features. Includes safety instructions, game descriptions, menu navigation, internet connectivity, warranty, and software license agreements.

lang:en score:14 filesize: 3.57 M page_count: 36 document date: 0000-00-00



[\[pdf\] Catalog](#)

Wholesale Letterpress PLAY View our 2022 Catalog here LetterpressPlay Web 0217 v 1645220485 cdn shopify s files 1 0067 7432 5312 |||

L E T T E R P R E S S P L A Y. C O M AUSTIN, TEXAS Sustainability, Community, Play Kyle Hawley P ... s charities. Our paper products employ a full range of printing methods using lead or wooden type, **blocks**, or polymer plates. We print by hand or with machines dating back to the Industrial Revolutio...

lang:en score:13 filesize: 12.8 M page_count: 47 document date: 2022-02-18



[\[pdf\] Catalog](#)

Click here to the 2022 Letterpress PLAY CatalogCatalog PLAY0421 LetterpressPlay Catalog Webcdn shopify s files 1 0067 7432 5312 0421 Web v 1650666389 |||

L E T T E R P R E S S P L A Y. C O M AUSTIN, TEXAS Sustainability, Community, Play Kyle Hawley P ... s charities. Our paper products employ a full range of printing methods using lead or wooden type, **blocks**, or polymer plates. We print by hand or with machines dating back to the Industrial Revolutio...

lang:en score:13 filesize: 12.87 M page_count: 47 document date: 2022-04-21



[\[pdf\] User Manual Owner's Manual Diagram](#)

PM0673 05 Megatouch Entertainer 2K10 pmd lkalb Manuals Repair Help and Technical Support meritgames Center Ion Wallette |||

Megatouch Wallette and Megatouch Entertainer Installation Owner's Manual FOR TECHNICAL ASSISTANCE: ... ed on this screen with the up and down arrows. The currency amount will apply to each 15minute time **block** selected by the customer.

FIGURE 5 - COINLESS COIN-OP MENU SETTINGS SCREEN FIGURE 4 - PLAYER...

lang:en score:13 filesize: 4.06 M page_count: 64 document date: 2009-09-18




[\[pdf\] User Manual Instructions](#)

PM0503 10 I2K6 EVO V2 01 wireless pmd lkalb AB Soft Megatouch Gametime user manual 543634 archive org manualsbase id

FOR TECHNICAL ASSISTANCE: CONTACT YOUR LOCAL AUTHORIZED DEALER For a list of dealers, visit the Game Heed all warnings. 4. Follow all instructions. 5. Do not use this apparatus near water. 6. Do not **block** any ventilation openings. Install in accordance with the manufacturer's instructions. 7. Do no...

lang:en score:13 filesize: 1.07 M page_count: 36 document date: 2007-11-26

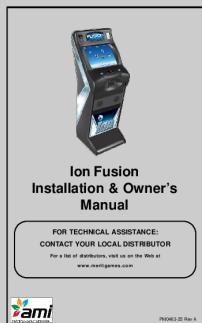

[Ion Fusion Installation & Owner's Manual - AMI Entertainment Network](#)

Detailed installation and owner's manual for the AMI Entertainment Network Ion Fusion arcade game. Covers setup, maintenance, software configuration, networking, and troubleshooting.

lang:en score:13 filesize: 1.16 M page_count: 64 document date: 2009-06-18



[\[pdf\] User Manual Owner's Manual](#)

PM0636 14 Ion Standard and Widescreen Aurora 2K11 UNRELEASED pmd lkalb Megatouch Manuals Repair Help Technical Support meritgames Center 80 |||

Ion Aurora Installation Owner's Manual FOR TECHNICAL ASSISTANCE: CONTACT YOUR LOCAL DISTRIBUTOR For a ... ed on this screen with the up and down arrows. The currency amount will apply to each 15minute time **block** selected by the customer. FIGURE 5 - COINLESS COIN-OP MENU SETTINGS SCREEN FIGURE 4 - PLAYER...

lang:en **score:12** filesize: 3.46 M page_count: 68 document date: 2016-05-09



[\[pdf\] Diagram](#)

PM0643 10 German 2010 5 pmd lkalb Megatouch Manuals Repair Help and Technical Support meritgames Center Translations |||

Megatouch Force 2010.5 und Ion 2010.5 Software PM0643-10 Inhaltsverzeichnis Name des Spiels er ... ietmodus mit dem Option-Button auf dem Kredite-/Preise-Men aktiviert wurde, knnen Spieler einen **Zeitblock** kaufen und in diesem beliebig viele Spiele spielen. Um den Wert eines Kredits in Mietmodus ein...

lang:de **score:12** filesize: 2.93 M page_count: 44 document date: 2010-03-10



[\[pdf\] User Manual Owner's Manual](#)

PM0426 26 Rev A Ion EVO 2K9 5 pmd lkalb Megatouch Manuals Repair Help and Technical Support Megatouch Support meritgames Support Center Ameritgames 80 |||

Ion eVo Installation Owner's Manual FOR TECHNICAL ASSISTANCE: CONTACT YOUR LOCAL DISTRIBUTOR For a ... ed on this screen with the up and down arrows. The currency amount will apply to each 15minute time **block** selected by the customer. FIGURE 5 - COINLESS COIN-OP MENU SETTINGS SCREEN FIGURE 4 - PLAYER...

lang:en **score:12** filesize: 1.11 M page_count: 60 document date: 2009-06-18




[pdf] User Manual Owner's Manual Diagram

PM0673 04 Megatouch Entertainer 2K9 5 unreleased pmd lkalb Manuals Repair Help and Technical SupportMegatouch Supportmeritgames Support Center Ion Wallette 04meritgames 80 |||

Megatouch Wallette and Megatouch Entertainer Installation Owner's Manual FOR TECHNICAL ASSISTANCE: ... ed on this screen with the up and down arrows. The currency amount will apply to each 15minute time **block** selected by the customer.

FIGURE 5 - COINLESS COIN-OP MENU SETTINGS SCREEN FIGURE 4 - PLAYER...


lang:en score:12 filesize: 1.16 M page_count: 64 document date: 2009-05-05

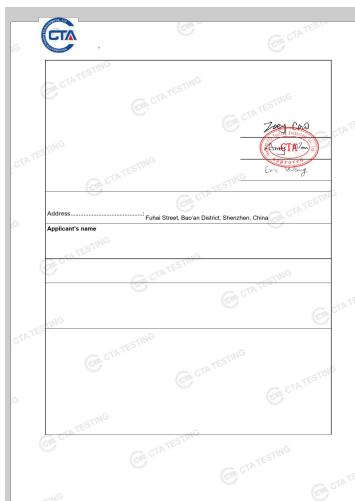

[FCC Part 15.247 Test Report for Chengdu MOONDROP MD-TWS-030](#)

Detailed FCC Part 15.247 test report for the Chengdu MOONDROP MD-TWS-030, covering conducted and radiated emissions, power output, spectral density, bandwidth, and out-of-band emissions, performed by Shenzhen CTA Testing Technology Co., Ltd.

lang:en score:12 filesize: 5.45 M page_count: 30 document date: 2024-07-01

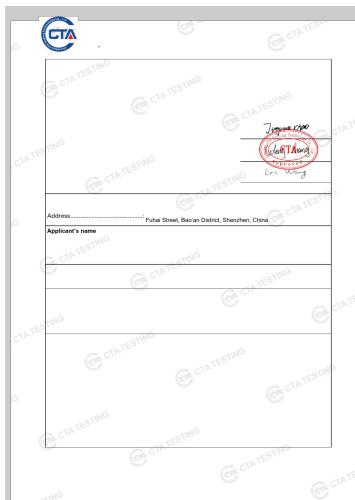

[pdf] Specifications Test Report

Test Report BLE PART1 Chengdu shuiyueyu technology Co Ltd MD HP 023 2AY45 2AY45MDHP023 md hp

Shenzhen CTA Testing Technology Co., Ltd. Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Co ... t 5 2.4 Short description of the Equipment under Test EUT 5 2.5 EUT operation mode 6 2.6 **Block** Diagram of Test Setup 6 2.7 Related Submittal s / Grant s 6 2.8 Modifications 6 3 ...

lang:en score:12 filesize: 5.96 M page_count: 35 document date: 2024-09-04

CTA
Street, Bao'an District, Shenzhen, China

2024-09-04
Eric Wang

Applicant's name
Fuhal Street, Bao'an District, Shenzhen, China

GFSK.THDGFSK.

[\[pdf\] Test Report](#)

Test Report BT PART1 Chengdu shuiyueyu technology Co Ltd MD HP 023 2AY45 2AY45MDHP023 md
hp

Shenzhen CTA Testing Technology Co., Ltd. Room 106, Building 1, Yibaolai
Industrial Park, Qiaotou Co ... t 5 2.4 Short description of the Equipment under Test
EUT 5 2.5 EUT operation mode 6 2.6 **Block** Diagram of Test Setup 6 2.7 Related
Submittal s / Grant s 6 2.8 Modifications 6 3 ...


lang:en **score:11** filesize: 5.52 M page_count: 35 document date: 2024-09-04



[Megatouch Wallette and Entertainer Installation & Owner's Manual](#)

Comprehensive installation and owner's manual for AMI Entertainment Network's
Megatouch Wallette and Megatouch Entertainer amusement game systems. Covers
setup, maintenance, troubleshooting, and software configuration.

lang:en **score:11** filesize: 4.06 M page_count: 64 document date: 2010-08-03

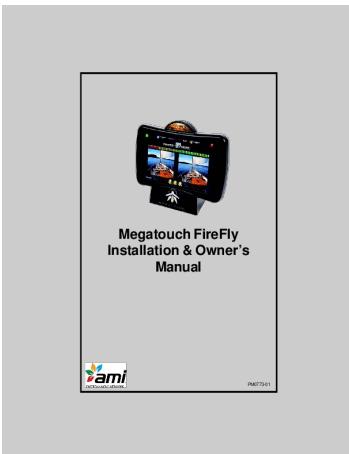


[\[pdf\] User Manual Owner's Manual](#)

PM0773 01 Megatouch FireFly owner s manual 2K10 5 UNRELEASED pmd spisarek Welcome to the
first portable system Before you begin your installation should determine best place meritgames Support
Center Firefly

Megatouch FireFly Installation Owner s Manual PM0773-01 Table of Contents Before
You Begin I Mode on and off in order to ensure accurate bookkeeping. Rental
Mode allows players to purchase a **block** of time and use it to play as many games as
they want in that time. To enable Rental Mode, tou...

lang:en **score:11** filesize: 804.15 K page_count: 52 document date: 2010-08-11

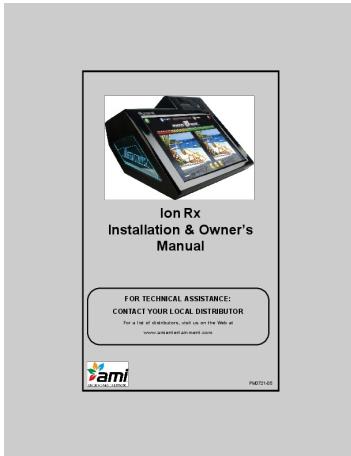

[\[pdf\]](#) User Manual Owner's Manual Instructions

PM0721 05 Ion Rx owner's manual 2K10 pmd lkab Megatouch it is important that they be replaced Watchdog Timer This game has been equipped with a fea part number HW0339 01 can or and Snap Shot meritgames Support Center

Ion Rx Installation Owner's Manual FOR TECHNICAL ASSISTANCE: CONTACT YOUR LOCAL DISTRIBUTOR For a ... ed on this screen with the up and down arrows. The currency amount will apply to each 15minute time **block** selected by the customer. FIGURE 5 - COINLESS COIN-OP MENU SETTINGS SCREEN FIGURE 4 - PLAYER...

lang:en **score:11** filesize: 3.46 M page_count: 64 document date: 2009-09-18




[\[pdf\]](#) User Manual Owner's Manual Instructions

PM0636 12 Ion Standard and Widescreen Aurora 2K10 unreleased pmd spisarek Installation Owner's Manual Megatouch Repair Mega Lease Link MegaNet MegaWeb TournaMAXX game will display the Main Menu Screen Number of Free Credits meritgames Support Center

Ion Aurora Installation Owner's Manual FOR TECHNICAL ASSISTANCE: CONTACT YOUR LOCAL DISTRIBUTOR Fo ... ed on this screen with the up and down arrows. The currency amount will apply to each 15minute time **block** selected by the customer. FIGURE 5 - COINLESS COIN-OP MENU SETTINGS SCREEN FIGURE 4 - PLAYER...

lang:en **score:11** filesize: 1.37 M page_count: 68 document date: 2009-09-18

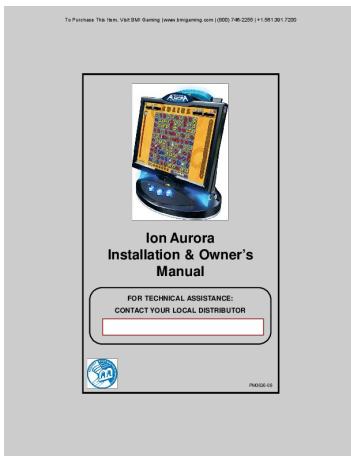


[\[pdf\]](#) User Manual Owner's Manual Flyer Borchure

PM0636 08 Ion Standard Aurora 2K9 V26 UNRELEASED pmd spisarek Installation Owner's Manual megatouch aurora touchscreen video game brochure merit ami entertainment FOR TECHNICAL ASSISTANCE CONTACT YOUR LOCAL DISTRIBUTOR For a list of distributors visit the Merit Entertainment Web site meritgames bmigaming Games Flyers arcade games

To Purchase This Item, Visit BMI Gaming www.bmigaming.com 800 746-2255 1.561.391.7200 Ion A ... ed on this screen with the up and down arrows. The currency amount will apply to each 15-minute time **block** selected by the customer. FIGURE 5 - COINLESS COIN-OP MENU SETTINGS SCREEN FIGURE 4 - PLAYER...


lang:en **score:11** filesize: 937.45 K page_count: 46 document date: 2013-03-15

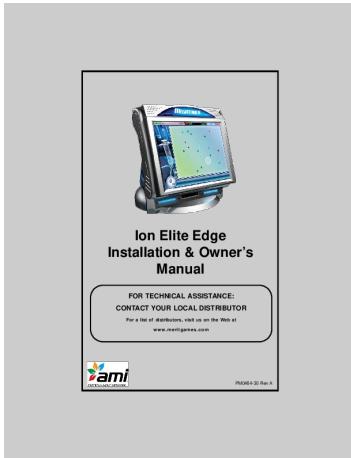

[Megatouch Ion Elite Edge Installation & Owner's Manual](#)

Installation and owner's manual for the Megatouch Ion Elite Edge video game system, covering setup, operation, maintenance, software, networking, and troubleshooting.


lang:en score:11 filesize: 1.08 M page_count: 60 document date: 2009-06-18

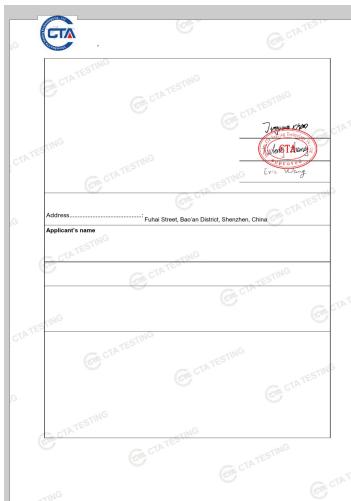

[MOONDROP MD-TWS-040 FCC Part 15 Subpart C Test Report - Wireless Earphones](#)

Official FCC Part 15 Subpart C test report for the MOONDROP MD-TWS-040 wireless earphones, detailing conducted and radiated emissions, output power, spectral density, bandwidth, and antenna requirements.

lang:en score:10 filesize: 4.62 M page_count: 35 document date: 2024-09-19

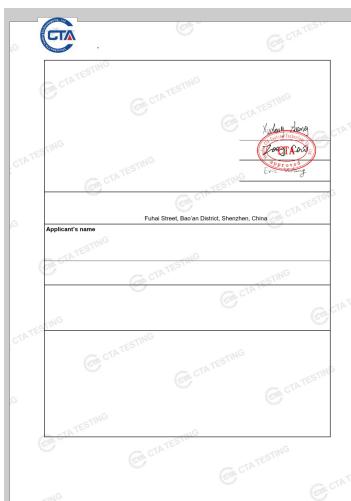

[\[pdf\] Specifications Test Report](#)

EMC TRF Template Tara Mitchell Test report part 1 Chengdu shuiyueyu technology Co Ltd MD TWS 039 2AY45 2AY45MDTWS039 md tws

Shenzhen CTA Testing Technology Co., Ltd. Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Co ... n of the Equipment under Test EUT 5 2.5 EUT configuration 5 2.6 EUT operation mode 6 2.7 **Block** Diagram of Test Setup 6 2.8 Related Submittal s / Grant s 6 2.9 Modifications 6 3 ...

lang:en score:10 filesize: 5.72 M page_count: 32 document date: 2025-02-20

Shenzhen CTA Testing Technology Co., Ltd.
Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street,
Bao'an District, Shenzhen, China

FCC PART 15 SUBPART C TEST REPORT	
FCC PART 15.247	
Report Reference No.	CTA2452099041
FCC ID	2AY45-2AY45MD-TWS-044
Compiled by	(position+printed name+signature) File administrator Jinghua Xiao 
Supervised by	(position+printed name+signature) Project Engineer Xuelong Zhang 
Approved by	(position+printed name+signature) RF Manager Eric Wang 
Date of issue	Jul. 16, 2024
Testing Laboratory Name	Shenzhen CTA Testing Technology Co., Ltd.
Address	Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Applicant's name	Chengdu shuiyueyu technology Co.,Ltd
Address	13th Floor, Building B, Binhai International Commercial Building, No. 1000 Huanhai Road, Wenzhou District, Chengdu City, Sichuan Province, China
Test specification	
Standard	FCC Part 15.247
Shenzhen CTA Testing Technology Co., Ltd. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is identified as the copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for any damage resulting from the unauthorized reproduction or use of the reproduced material due to its inaccuracy and content.	
Test Item Description	DL-TWS-001
Trade Mark	MOONDROP
Manufacturer	Chengdu MOONDROP Co.,Ltd
Model/Type reference	MD-TWS-044
Labeled Models	N/A
Modulation	GFSK
Frequency	From 2402MHz to 2480MHz
Ratings	DC 3.7V From Battery and DC 5.0V From external circuit
Result	PASS

MOONDROP DL-TWS-001 FCC Part 15.247 Test Report and Technical Specifications

FCC Part 15.247 test report for the MOONDROP DL-TWS-001 wireless audio device, covering conducted and radiated emissions, power output, bandwidth, and spectral density tests performed by Shenzhen CTA Testing Technology Co., Ltd.

lang:en score:10 filesize: 5.8 M page_count: 45 document date: 2024-09-11

Shenzhen CTA Testing Technology Co., Ltd.
Street, Bao'an District, Shenzhen, China

EMC TRF Template Tara Mitchell Test report part 1 Chengdu shuiyueyu technology Co Ltd MD TWS 039 2AY45 2AY45MDTWS039 md tws	
Applicant's name	Shenzhen CTA Testing Technology Co., Ltd. Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Co ... n of the Equipment under Test EUT 5 2.5 EUT configuration 5 2.6 EUT operation mode 6 2.7 Block Diagram of Test Setup 6 2.8 Related Submittal s / Grant s 6 2.9 Modifications 6 3 ...
Address	Fuhai Street, Bao'an District, Shenzhen, China
Modulation	GFSK, TDGFSK, BDGFSK

[pdf] Test Report

EMC TRF Template Tara Mitchell Test report part 1 Chengdu shuiyueyu technology Co Ltd MD TWS 039
2AY45 2AY45MDTWS039 md tws

Shenzhen CTA Testing Technology Co., Ltd. Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Co ... n of the Equipment under Test EUT 5 2.5 EUT configuration 5 2.6 EUT operation mode 6 2.7 **Block** Diagram of Test Setup 6 2.8 Related Submittal s / Grant s 6 2.9 Modifications 6 3 ...

lang:en score:9 filesize: 5.8 M page_count: 35 document date: 2025-02-20