

[Manuals.plus](#) /

› [Gotopceed](#) /

› Gotopceed Rechargeable Motion Sensor Wall Light with Remote (Model T051) - User Manual

Gotopceed T051

Gotopceed Rechargeable Motion Sensor Wall Light with Remote

Model: T051

INTRODUCTION

Thank you for choosing the Gotopceed Rechargeable Motion Sensor Wall Light. This innovative lighting solution provides convenient, adjustable illumination for various spaces without the need for complex wiring. Featuring a built-in high-capacity battery, motion sensing, remote control, and flexible installation options, this light is designed to enhance your home's functionality and comfort.

Key Features:

- **Rechargeable Battery:** Built-in 6000 mAh battery, offering 30-60 days in motion sensor mode or 6-18 hours in 'ON' mode on a single charge.
- **Easy Charging:** Removable design allows for convenient charging via the included USB cable.
- **Adjustable Lighting:** 400 Lumen brightness with 10 levels (10%-100%) and 3 color temperature options (3000K Warm White, 4000K Natural White, 6000K Cool White).
- **Adjustable Angle:** Light head can be adjusted at multiple angles (up to 270° rotation and 180° tilt) to direct illumination precisely where needed.
- **Motion Sensor:** Detects motion within a 120-degree angle and up to 10 feet, automatically turning the light on in dark conditions.
- **Remote Control:** Provides convenient control over brightness, color temperature, and operating modes.
- **Versatile Installation:** Offers both magnetic mounting for easy removal and sturdy screw mounting for uneven surfaces.
- **No Wiring Required:** Ideal for dark areas without electricity, such as closets, pantries, garages, stairs, and hallways.

WHAT'S IN THE BOX

Please check the package contents upon receipt to ensure all items are present:

- 1 x Rechargeable Motion Sensor Light
- 1 x Remote Control
- 1 x USB Cable
- 1 x Magnetizing Sheet (with adhesive)
- 1 x User Manual

PRODUCT OVERVIEW

Familiarize yourself with the main components of your Gotopceed Motion Sensor Wall Light.



The main unit of the Gotopceed Rechargeable Motion Sensor Wall Light, showing its compact design and integrated motion sensor.



Illustration of the remote control and the light's adjustable brightness and three color temperature settings (3000K, 4000K, 6000K).

SETUP & INSTALLATION

Your Gotopceed wall light offers two installation methods: magnetic mount for convenience and screw mount for enhanced stability.

Magnetic Mount Installation:

1. Clean the desired wall surface to ensure it is dry and free of dust.
2. Peel off the protective film from the adhesive side of the magnetizing sheet.
3. Firmly press the magnetizing sheet onto the cleaned wall surface.
4. Align the back of the light unit with the magnetizing sheet until it securely attaches. The light can be easily removed for charging.

Rechargeable & Long Lasting



30-60 Days
Auto ON



6-18 Hours
Stay ON



4-5 Hours
Fully Charged



**NEW
UPGRADED**

A hand demonstrating the magnetic attachment of the light to its wall plate.



A three-step visual guide for magnetic installation: peel adhesive, attach metal sheet to wall, then magnetize the light.

Screw Mount Installation (for uneven or peeling walls):

1. Mark the desired installation location on the wall.
2. Drill two holes at the marked positions.
3. Insert wall anchors (if necessary) and screw in the provided screws, leaving a small gap.
4. Align the mounting holes on the light's base with the screws and slide the light down to secure it.

OPERATING INSTRUCTIONS

Powering On/Off:

Use the remote control to turn the light on or off, or to switch between modes.

Motion Sensor Mode:

In motion sensor mode, the light will automatically turn on when motion is detected in dark environments and turn off after a period of inactivity. The detection range is approximately 120 degrees and up to 10 feet.

Adjustable Lighting & Angle




3 Color



Dimmable



Adjustable Angle

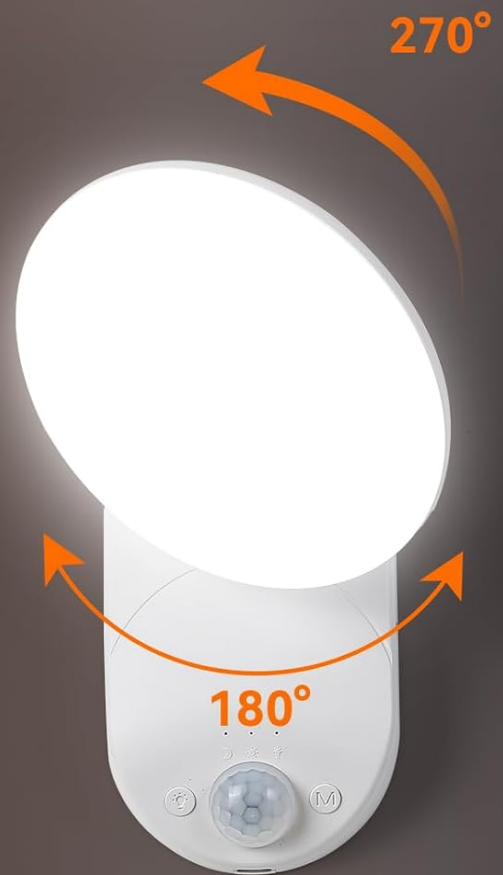

Visual representation of the motion sensor's detection area and range in a stairwell setting.

Adjusting Lighting & Angle:

The light head can be manually adjusted to direct illumination. Use the remote control to cycle through 3 color temperatures (3000K, 4000K, 6000K) and adjust brightness from 10% to 100% (400 Lumens maximum).

No Wiring & Magnetic Mount



Diagram illustrating the flexible adjustment capabilities of the light head, including rotation and tilt.

Official Product Video:

Your browser does not support the video tag.

This video demonstrates the installation and various features of the Gotopceed Rechargeable Motion Sensor Wall Light, including its magnetic mounting, adjustable light head, and motion detection capabilities.

CHARGING

When the battery is low, the light's indicator will signal the need for charging. To charge, simply remove the light unit from its magnetic base and connect it to the included USB cable. A full charge typically takes 4-5 hours.

Motion Sensor wall Light



Motion
Sensor



Remote
Control



USB
Rechargeable



400
Lumen



3 color
temperature



Information on battery life and charging times: 30-60 days in auto mode, 6-18 hours in ON mode, and 4-5 hours for a full charge.

Motion Sensor Wall Light



120°

10FT



A visual comparison highlighting the ease of removing the wall light for charging compared to the difficulty of charging a ceiling-mounted light.

MAINTENANCE

To ensure optimal performance and longevity of your Gotopceed Motion Sensor Wall Light, follow these simple maintenance guidelines:

- **Cleaning:** Wipe the light's surface with a soft, dry cloth. Avoid using abrasive cleaners or solvents, as these can damage the finish.
- **Battery Care:** For best battery life, avoid fully discharging the light frequently. Charge it when the indicator suggests. If storing for an extended period, charge the battery to about 50% every few months.
- **Sensor Area:** Keep the motion sensor lens clean and unobstructed to ensure accurate detection.
- **Environment:** This light is designed for indoor use. Avoid exposing it to extreme temperatures, high humidity, or direct water contact.

TROUBLESHOOTING

If you encounter any issues with your Gotopceed Motion Sensor Wall Light, please refer to the following common problems and solutions:

- **Light does not turn on:**
 - Ensure the battery is charged. Connect the light to the USB cable and charge for 4-5 hours.
 - Check if the light is in the correct operating mode (e.g., motion sensor mode in a dark environment).
 - Verify that the motion sensor is not obstructed.
- **Motion sensor is not detecting movement:**
 - Ensure the light is in motion sensor mode.
 - Check the detection range (up to 10 feet) and angle (120 degrees). Adjust the light's position if necessary.
 - Clean the sensor lens to remove any dust or debris.
- **Remote control is not working:**
 - Ensure there are no obstructions between the remote and the light.
 - Check the remote control's battery and replace if necessary.
- **Light flickers or is dim:**
 - The battery may be low. Recharge the light fully.
 - Ensure the brightness setting is not at its lowest level. Adjust using the remote.

If these steps do not resolve the issue, please contact customer support for further assistance.

SPECIFICATIONS

Brand	Gotopceed
Model Number	T051
Color	3 Colour Temperatures (3000K, 4000K, 6000K)
Material	Plastic

Style	Magnetic suction
Light Fixture Form	Wall
Room Type	Closet, Stairs, Pantry, Hallway, Shower, Shed, Porch, Garage
Indoor/Outdoor Usage	Indoor
Power Source	Battery Powered
Special Features	Adjustable Angle, Motion Sensor, USB Rechargeable
Control Method	Remote Control
Light Source	LED
Number of Light Sources	1
Brightness	400 Lumens (Max)
Water Resistance Level	Waterproof
Mounting Type	Wall Mount
Fixture Type	Removable
Item Dimensions L x W x H	8"L x 4.7"W x 2.7"H

WARRANTY AND SUPPORT

Your Gotopceed Rechargeable Motion Sensor Wall Light comes with a **2-year manufacturer's warranty**, covering defects in materials and workmanship from the date of purchase.

For any questions, technical support, or warranty claims, please contact Gotopceed customer service. We are committed to providing online customer support with quick replies within 12 hours. Our mission is to make smarter lights for better home efficiency, and reliable service is our priority.



Gotopceed offers 24-hour customer service and a lifetime warranty, emphasizing commitment to customer satisfaction.

Online Customer Support
Quick Reply Within 12 Hours
Reliable Service Is Our Priority

**Make Smarter Lights For Better
Home Efficiency**
Our Mission



Meets Global Safety Standards
we take your life and property safety seriously

Details on online customer support, quick response times, and adherence to global safety standards (CE, FCC, RoHS).

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0DCTVB78L>

More documents and user manuals: <https://manuals.plus/>