

MIUI SBL-1702E

MIUI Mini Juicer SBL-1702E Instruction Manual

Model: SBL-1702E | Brand: MIUI

1. INTRODUCTION

This manual provides essential information for the safe and efficient operation of your MIUI Mini Juicer SBL-1702E. Please read all instructions carefully before first use and retain this manual for future reference. The MIUI Mini Juicer is designed for extracting juice from various fruits and vegetables using a slow-press mechanism, and also features an ice cream making function.

2. SAFETY INSTRUCTIONS

- Always ensure the juicer is properly assembled before operation.
- Do not immerse the motor base in water or other liquids.
- Keep hands and utensils away from moving parts during operation.
- Unplug the appliance from the power outlet before cleaning or when not in use.
- Do not operate the juicer if the power cord or plug is damaged.
- This appliance is for household use only.
- Ensure the feed chute is clear before inserting ingredients. Use the food pusher provided, never your fingers.
- The juicer is equipped with overheat protection. If the motor stops, allow it to cool down before resuming operation.

3. PRODUCT OVERVIEW

Familiarize yourself with the components of your MIUI Mini Juicer:

1. Food Pusher
2. Feeding Chute
3. Auger (Squeezing Screw)
4. Filter (Strainer)
5. Juice Chamber
6. Pulp Outlet

7. Juice Outlet
8. Motor Base with Control Lever
9. Juice Cup
10. Pulp Cup

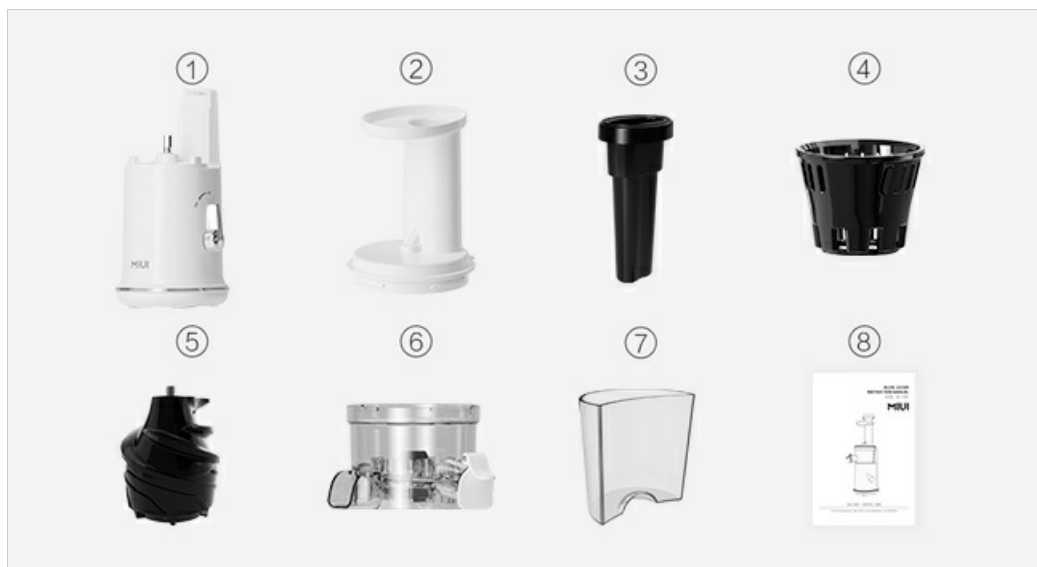


Image: Exploded view of the MIUI Mini Juicer components.

4. SETUP AND ASSEMBLY

The MIUI Mini Juicer is designed for quick and easy assembly. Follow these steps:

1. Place the motor base on a stable, flat surface.
2. Align the juice chamber with the motor base and rotate until it locks securely into place.
3. Insert the filter (strainer) into the juice chamber.
4. Place the auger (squeezing screw) into the center of the filter.
5. Attach the feeding chute assembly, ensuring it aligns with the juice chamber and locks into position.
6. Place the juice cup under the juice outlet and the pulp cup under the pulp outlet.



Image: Visual guide for quick installation of the juicer components.

5. OPERATING INSTRUCTIONS

5.1 Juicing Fruits and Vegetables

1. Wash all fruits and vegetables thoroughly.
2. Cut ingredients into pieces small enough to fit into the feeding chute. Remove hard seeds, pits, and thick peels (e.g., from lemons, oranges).
3. Plug in the juicer and turn the control lever to the 'ON' position.
4. Slowly feed the prepared ingredients into the chute. Use the food pusher to gently guide them down. Do not force ingredients.
5. The juicer operates at 50 RPM for slow, efficient juice extraction, minimizing oxidation.
6. The 7.8° tilted juice chamber design ensures maximum juice collection without wastage.
7. Once juicing is complete, turn the control lever to 'OFF' and unplug the appliance.



Image: Slow squeezing process for efficient juice extraction.



Image: The 7-degree tilted juice chamber design for complete juice collection.

5.2 Making Ice Cream

The MIUI Mini Juicer can also be used to make ice cream. Ensure you are using the appropriate filter for this function (if different from the juicing filter, refer to your specific model's accessories).

1. Prepare frozen fruits (e.g., bananas, berries) or other ingredients suitable for ice cream.

2. Assemble the juicer with the ice cream filter (if applicable).
3. Plug in the juicer and turn the control lever to the 'ON' position.
4. Slowly feed the frozen ingredients into the chute, using the food pusher to guide them.
5. The juicer will process the frozen ingredients into a soft-serve consistency.
6. Once complete, turn the control lever to 'OFF' and unplug the appliance.

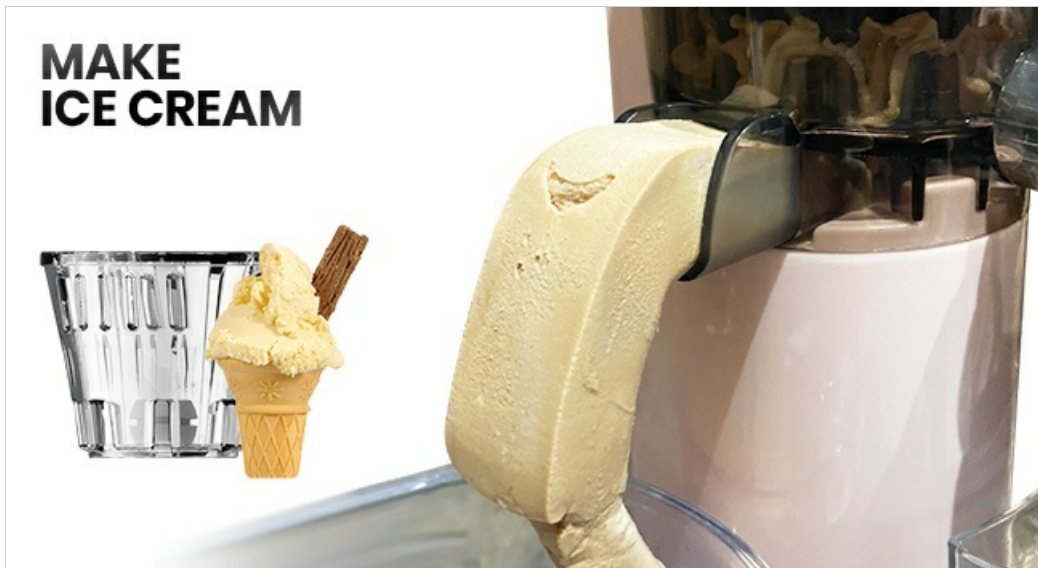


Image: The juicer's capability to produce ice cream from frozen ingredients.

5.3 Operational Video

Your browser does not support the video tag.

Video: This video demonstrates the features and operation of the MIUI Mini Cold Press Juicer, including its slow squeezing action, tilting chamber, and compact design.

6. MAINTENANCE AND CLEANING

Regular cleaning ensures the longevity and hygiene of your juicer. All detachable parts are designed for easy cleaning.

1. Before cleaning, always turn off the juicer and unplug it from the power outlet.
2. Disassemble the juicer by reversing the assembly steps.
3. Rinse all detachable parts (food pusher, feeding chute, auger, filter, juice chamber, juice cup, pulp cup) under running water.
4. Use the included cleaning brush to remove any pulp residue from the filter and other components.
5. All detachable parts are dishwasher safe for convenience.
6. Wipe the motor base with a damp cloth. Never immerse the motor base in water.
7. Allow all parts to dry completely before reassembling or storing.



Image: Demonstrating the ease of cleaning juicer components under running water.

7. TROUBLESHOOTING

If you encounter issues with your MIUI Mini Juicer, refer to the following common problems and solutions:

- **Juicer does not turn on:** Ensure the power cord is securely plugged into a working outlet. Check if the juicer is properly assembled and all safety locks are engaged.
- **Motor stops during operation:** The juicer may have overheated. Turn off and unplug the unit, then allow it to cool down for at least 30 minutes before restarting. Reduce the load by cutting ingredients into smaller pieces.
- **Low juice yield or wet pulp:** Ensure ingredients are fresh. Cut ingredients into appropriate sizes. Do not overload the juicer or push ingredients too quickly.
- **Excessive vibration or noise:** Check that all components are correctly assembled and securely locked. Ensure the juicer is on a stable, flat surface.
- **Pulp backing up in the chute:** This can occur with fibrous ingredients. Ensure ingredients are cut into small pieces. If pulp accumulates, turn off the juicer, disassemble, and clear the blockage.

If the problem persists after attempting these solutions, please contact customer support.

8. SPECIFICATIONS

Feature	Specification
Product Model	SBL-1702E
Brand	MIUI
Maximum Power	120 Watts
Voltage	120 Volts
Rotating Speed	50 RPM
Operation Mode	Knob
Continuous Working Time	≤ 15 minutes
Capacity	300 Milliliters

Product Dimensions (D x W x H)	5.31"D x 6.57"W x 13.46"H (13.4cm x 16.7cm x 34.2cm)
Item Weight	4.25 pounds (1.93 kg)
Material	Plastic (BPA Free)
Special Features	Overheat Protection, Portable, Quiet Motor, High Acid-resistant Material
Product Care Instructions	Dishwasher Safe (detachable parts)



Product parameter



Product model: SBL-1702E

Voltage: 220-240V

Power: 120W

Rotating speed: 50RPM

Operation mode: Knob

Continuous working time: ≤15 minutes

Packing size: 283×145×287mm

Packing weight: 1.7KG

Image: Detailed product parameters and dimensions.

9. WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the documentation included with your purchase or contact the MIUI flagship store directly. Keep your proof of purchase for any warranty claims.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question

and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question