

[Manuals.plus](#) /

› [Solareye](#) /

› Solareye X13FR Compressed Air Duster User Manual

Solareye X13FR

Solareye X13FR Compressed Air Duster User Manual

Model: X13FR

1. PRODUCT OVERVIEW

The Solareye X13FR is a powerful, rechargeable compressed air duster designed for efficient cleaning of various items. It features a high-speed motor, multiple airflow settings, and a long-lasting battery, offering an environmentally friendly and cost-effective alternative to traditional canned air.



Image: The Solareye X13FR Compressed Air Duster, a compact and powerful cleaning device.

Key Features:

- **Powerful Airflow:** Equipped with a 180,000 RPM motor, providing strong air pressure for effective dust removal.
- **Reusable and Economical:** A rechargeable device that eliminates the need for disposable canned air, saving money and reducing waste.
- **Long-lasting Battery:** Features a 6000mAh high-capacity battery with temperature, current, and short-circuit protection.

- **Fast Charging:** Supports 10W fast charging, achieving a full charge in approximately 2.5 hours.
- **Multi-scene Use:** Suitable for cleaning electronics, car interiors, household items, and outdoor spaces.
- **Compact and Portable Design:** Lightweight and easy to carry, comparable in size to a mobile phone.



Solareye X13

NOUVEAU SUPER ASPIRATEUR À AIR ÉLECTRIQUE

Bon remplacement pour les canettes d'air


180000 RPM Moteur	306 G Mini Design
6000 mAh Batterie	3 Vitesses Réglage
2.5H Type-C Chargement	150° Protection contre la surchauffe

Image: A visual comparison highlighting the advantages of the Solareye X13FR electric air duster over traditional canned air, emphasizing reusability and efficiency.

2. PACKAGE CONTENTS

Please check the box contents upon receipt to ensure all items are present and undamaged.

- Solareye X13FR Air Duster x 1
- Nozzles x 2
- Brushes x 10
- USB Cable x 1
- Storage Bag x 1
- User Manual x 1

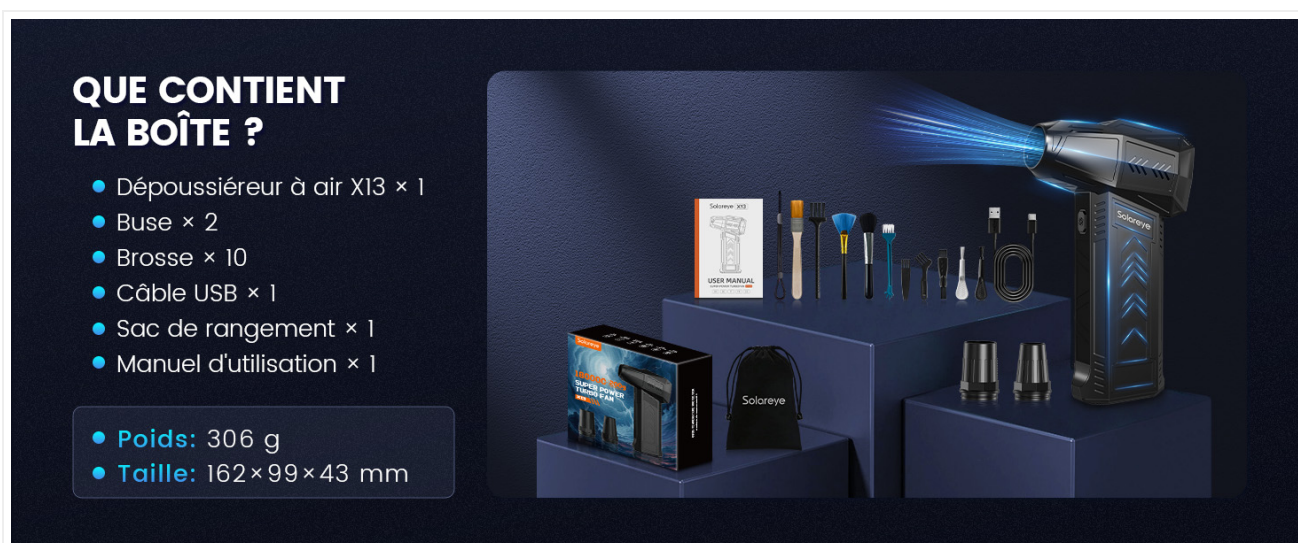

QUE CONTIENT LA BOÎTE ?

- Dépoussiéreur à air X13 × 1
- Buse × 2
- Brosse × 10
- Câble USB × 1
- Sac de rangement × 1
- Manuel d'utilisation × 1

• **Poids:** 306 g
• **Taille:** 162×99×43 mm

Image: A visual representation of the Solareye X13FR air duster and its included accessories, such as nozzles, brushes, USB cable, and storage bag.

3. SAFETY INSTRUCTIONS

Please read and understand all safety instructions before using the Solareye X13FR Compressed Air Duster.

- Use only a 5V2A power adapter for charging.
- Do not exceed 12 hours of charging time to prevent overcharging and battery damage.
- Keep the product away from fire sources or flammable materials.
- Do not block the air intake or outlet during operation.
- Avoid directing airflow directly at people or animals.
- This device is not a toy; keep out of reach of children.
- The device features overheat protection and will automatically stop if the temperature reaches 150°C to ensure safety.

4. SETUP

Initial Charging:

1. Before first use, fully charge the air duster.
2. Connect the provided USB cable to the device's Type-C charging port.
3. Plug the other end of the USB cable into a 5V2A power adapter (not included).
4. The charging indicator will show the charging status. A full charge typically takes about 2.5 hours.

DESIGN PORTABLE

Confortable à tenir / Facile à transporter

● Poids:
306 g

● Taille:
162×99×43 mm



Image: The Solareye X13FR air duster connected to a USB-C cable for charging, indicating its rechargeable nature.

Attaching Nozzles:

- Select the appropriate nozzle for your cleaning task.
- Align the nozzle with the air outlet of the duster.
- Gently push and twist the nozzle until it is securely attached.

5. OPERATING INSTRUCTIONS

Power On/Off and Speed Adjustment:

1. To power on, press and hold the power button for a few seconds until the device starts.
2. Press the power button briefly to cycle through the three speed settings:
 - **1st Speed:** 40,000 RPM (14 m/s wind speed) - Suitable for delicate dusting.
 - **2nd Speed:** 80,000 RPM (36 m/s wind speed) - General cleaning.
 - **3rd Speed:** 180,000 RPM (45 m/s wind speed) - Powerful cleaning for stubborn dirt.
3. To power off, press and hold the power button again until the device stops.



Image: The Solareye X13FR air duster demonstrating its three adjustable speed settings (40,000 RPM, 80,000 RPM, 180,000 RPM) for varied cleaning tasks.

Applications:

The Solareye X13FR is versatile and can be used for a wide range of cleaning tasks:

- **Electronics:** Keyboards, computer towers, game consoles, cameras, air conditioners, toys.
- **Home:** Sofas, window/door tracks, storage cabinets, pet hair removal, drying wet items.
- **Automotive:** Car interiors (dashboard, vents), windows, side mirrors, snow removal.
- **Outdoor:** Blowing wood chips, inflating items (mattresses, rafts), starting barbecues, clearing leaves.

NETTOYAGE DE L'ÉLECTRONIQUE



Image: The Solareye X13FR air duster being used to clean various electronic devices, including a keyboard, computer tower, and game console.

NETTOYAGE DE LA MAISON



Image: The Solareye X13FR air duster used for various home cleaning tasks, such as cleaning sofas, window tracks, and drying pet hair.

NETTOYAGE DE VOITURES



Image: The Solareye X13FR air duster demonstrating its utility for car cleaning, including snow removal, cleaning air vents, and drying windows.

NETTOYAGE EXTÉRIEUR



Image: The Solareye X13FR air duster being used for outdoor cleaning tasks, such as blowing wood chips, inflating pool toys, and clearing leaves.

Video: A demonstration of the Solareye X13FR air duster in action, showcasing its effectiveness for quick cleaning tasks and DIY projects.

6. MAINTENANCE

Cleaning the Device:

- Ensure the device is powered off and unplugged before cleaning.
- Wipe the exterior of the duster with a soft, dry cloth.
- Do not use harsh chemicals or abrasive cleaners.
- Periodically check the air intake for any blockages and clear them carefully.

Battery Care:

- To prolong battery life, avoid completely draining the battery before recharging.
- Store the device in a cool, dry place when not in use.
- If storing for an extended period, charge the battery to approximately 50% every three months.

7. TROUBLESHOOTING

If you encounter any issues with your Solareye X13FR, please refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Device does not turn on	Low battery; Device not charged	Charge the device fully using a 5V2A adapter.
Weak airflow	Low battery; Air intake/outlet blocked; Incorrect speed setting	Recharge the device; Clear any blockages; Select a higher speed setting.
Device stops unexpectedly	Overheat protection activated; Low battery	Allow the device to cool down; Recharge the device.

Problem	Possible Cause	Solution
Charging not working	Faulty cable/adapter; Loose connection	Ensure cable is securely connected; Try a different 5V2A USB adapter and cable.

8. SPECIFICATIONS

Feature	Detail
Brand	Solareye
Model Number	X13FR
Motor Speed	Up to 180,000 RPM
Wind Speed	Up to 52 m/s
Battery Capacity	6000mAh (3000mAh x 2)
Charging Time	Approx. 2.5 hours (with 10W fast charging)
Battery Life (approx.)	1st speed: ≥ 100 min 2nd speed: ≥ 20 min 3rd speed: ≥ 10 min
Dimensions (L x H)	43 x 162 mm
Item Weight	500 Grams
Overheat Protection	Automatic shutdown at 150°C

LONGUE DURÉE DE VIE DE LA BATTERIE AVEC PROTECTION INTELLIGENTE



Durée d'endurance

1ère vitesse ≥ 100 min

2ème vitesse ≥ 20 min

3ème vitesse ≥ 10 min

Batterie haute capacité 3000 mAh x 2

Protection contre la surchauffe à 150°:
Lorsque le dépoussiéreur d'air atteint 150°, il s'arrête automatiquement de fonctionner, éliminant ainsi toutes sortes de risques pour la sécurité.



100Min Autonomie (1ère vitesse)

Charge rapide 10W
charge complète en 2,5 heures

Type-C

Image: An illustration detailing the Solareye X13FR's battery specifications, including its 6000mAh capacity, fast charging, and intelligent overheat protection.



Image: An exploded view of the Solareye X13FR's high-quality motor, highlighting its internal components and efficient design.

9. WARRANTY AND SUPPORT

Solareye is committed to providing high-quality products and excellent customer service.

Warranty Information:

- **30-Day Return Policy:** Enjoy a 30-day return or exchange policy without specific reason.
- **360-Day Replacement:** Replacement units and accessories are available within 360 days of purchase.

Customer Support:

- **24-Hour Response:** Professional customer service available 24 hours a day for rapid assistance.
- **Lifetime After-Sales Service:** Solareye provides lifetime after-sales support for every customer.

 **24 heures**

Réponse rapide et attitude professionnelle 24 heures sur 24

 **30 jours**

30 jours sans raison de retour ou d'échange

 **360 jours**

Remplacement et accessoires disponibles dans les 365 jours

 **Durée de vie**

Service après-vente à vie pour chaque client

Image: Icons representing Solareye's customer support and warranty commitments, including 24-hour response, 30-day returns, 360-day replacement, and lifetime after-sales service.