

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- > [Baseus](#) /
- > [Baseus Magsafe Portable Charger User Manual](#)

Baseus Qi2 10000mAh Black (PPWPQ10-20)

Baseus Magsafe Portable Charger User Manual

Model: Qi2 10000mAh Black (PPWPQ10-20)

Brand: Baseus

INTRODUCTION

This user manual provides comprehensive instructions for the Baseus Magsafe Portable Charger, a 10,000mAh power bank designed for efficient and convenient charging of your mobile devices. Featuring Qi2 certified 15W wireless charging and versatile wired charging options, this power bank is an ideal companion for users of iPhone 12/13/14/15/16 series and other compatible devices.


KEY FEATURES

Qi2 Certified 15W Wireless Charging

Experience authentic 15W high-speed wireless charging, significantly faster than older 7.5W Qi standard chargers. This power bank is Qi2 official certified (Qi2 ID: QI-22047), ensuring seamless compatibility and optimized charging efficiency for MagSafe-enabled iPhones (iPhone 12 or later). It can charge an iPhone 16 Pro from 0% to 35% in approximately 30 minutes.

Qi2 Certified 15W Fast Charging

2X Faster Charging than Old 7.5W Power Bank

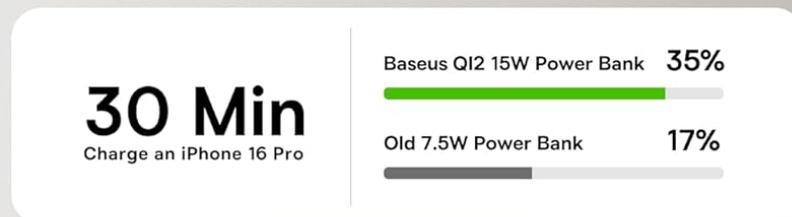

*Data based on internal lab testing.

Image: The Baseus MagSafe Portable Charger demonstrating its Qi2 certified 15W fast wireless charging, showing a phone charging from 0% to 35% in 30 minutes.

Dual Fast Charging Ports

Unlike many MagSafe battery packs with only one USB-C port, the Baseus Qi2 MagSafe battery pack includes two wired output ports: one 22.5W USB-A port and one 20W USB-C port. This allows for simultaneous wired charging of up to two devices, offering versatile charging options for phones, tablets, and other compatible electronics.

2-Port Magnetic Power Bank

Double Charging Efficiency



Image: The Baseus Magsafe Portable Charger connected via cables to two different mobile devices, illustrating its dual fast charging capabilities.

Strong Magnetic Attachment

The power bank features 2.5lb strong magnets, ensuring a firm and precise attachment to your iPhone 12 or later. This magnetic power profile, part of the Qi2 standard, helps prevent misalignment, reduces heat generation, and can contribute to extended battery life. Its compact design allows it to easily fit into your pocket, making it a convenient charging companion on the go.

Extra Power for Your Phone

10000mAh Keep Devices Going Non-Stop

10000
mAh



Airline
Approved



iPhone 16

1.8 Charges



iPhone 16
Pro Max

1.3 Charges

Image: A close-up of the Baseus Magsafe Portable Charger magnetically adhering to an iPhone, demonstrating the strength of its 11N magnetic force.

All-Day Power & Portability

With a 10,000mAh capacity, this portable battery can charge an iPhone 15 or Samsung S24 approximately 1.8 times. It provides multiple charges throughout the day and is airline-approved for travel. Its lightweight and compact form factor (approximately 209g / 0.46lb, 4.33" x 2.72" x 0.68") makes it highly portable for business trips, vacations, or daily use.

11N Strong Magnetic Force

Charge Effortlessly Anytime

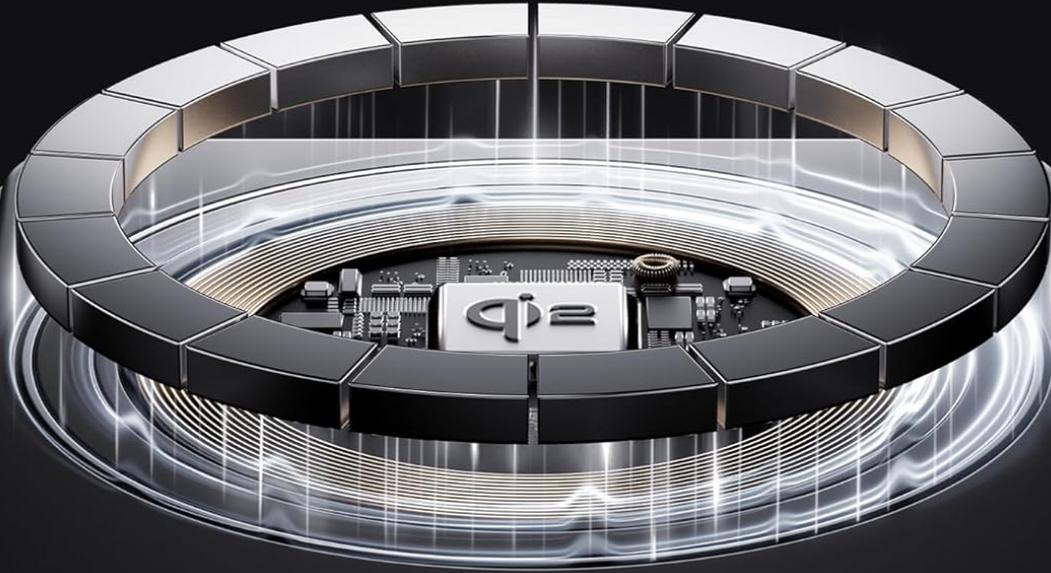


Image: The Baseus Magsafe Portable Charger shown in hand, emphasizing its compact size and its ability to provide extra power for phones, with a 10,000mAh capacity.

Advanced Safety Features & Low-Current Mode

Equipped with a low-current mode, this charger delivers the precise amount of power needed for smaller devices like AirPods, earbuds, or smartwatches, preventing overcharging. It incorporates digital 9-layer protections and exact algorithms that monitor charging status 1,000,000 times per minute, ensuring comprehensive safety during use.

Lighter & Portable Always On the Go



Image: The Baseus Magsafe Portable Charger alongside its packaging and included cable, highlighting its worry-free charging experience with a 2-year replacement promise and lifetime technical support.

SETUP

- Initial Charge:** Before first use, fully charge the power bank using a USB-C cable and a compatible power adapter. The LED indicators on the side will show the charging progress.
- Check Battery Level:** Press the small button on the side of the power bank to check the current battery level. Four LED dots indicate the charge: one dot for 0-25%, two for 25-50%, three for 50-75%, and four for 75-100%.



Image: The Baseus Magsafe Portable Charger displaying its LED indicator lights on the side, which show the remaining battery level.

OPERATING INSTRUCTIONS

Wireless Charging (MagSafe Compatible)

1. Ensure your iPhone is MagSafe compatible (iPhone 12 or later).
2. Align the back of your iPhone with the magnetic charging area on the power bank. The magnets will snap into

place, and charging will begin automatically.

3. For optimal wireless charging, ensure no foreign objects are between the power bank and your device.

Wired Charging (USB-A & USB-C)

1. Connect one end of a compatible charging cable to either the USB-A (22.5W max) or USB-C (20W max) port on the power bank.
2. Connect the other end of the cable to your device. Charging will commence automatically.
3. For fastest wired charging, use the USB-A port with a compatible cable.

Low-Current Mode

To charge low-power devices such as AirPods, earbuds, or smartwatches, activate the low-current mode:

- Double-press the power button and then hold it down to enter low-current mode.
- Short press the power button again to exit low-current mode.

MAINTENANCE

- Keep the power bank away from extreme temperatures, direct sunlight, and liquids.
- Clean the surface with a soft, dry cloth. Do not use harsh chemicals or abrasive materials.
- Store in a cool, dry place when not in use for extended periods.
- Avoid dropping or subjecting the device to strong impacts.

TROUBLESHOOTING

- **Device not charging:**
 - Ensure the power bank is sufficiently charged.
 - Check cable connections for wired charging.
 - For wireless charging, ensure proper alignment and that your device is MagSafe compatible.
 - Remove any thick cases or metal objects that may interfere with wireless charging.
- **Slow charging:**
 - Verify that your device supports fast charging and that you are using a compatible cable and port (USB-A for 22.5W, USB-C for 20W).
 - Background apps or high device usage during charging can slow down the process.
- **Overheating:**
 - Some heat generation during charging is normal. If the device or power bank becomes excessively hot, disconnect it immediately.
 - Ensure proper alignment for wireless charging to minimize heat.
 - Avoid charging in direct sunlight or hot environments.

SPECIFICATIONS

Feature	Detail
Brand	Baseus
Model Number	PPWPQ10-20

Battery Capacity	10,000 mAh
Wireless Charging Output	15W (Qi2 Certified)
USB-A Output	22.5W Max
USB-C Output	20W Max
Product Dimensions	4.4 x 0.74 x 2.75 inches
Item Weight	7.4 ounces
Color	Black

WARRANTY AND SUPPORT

The Baseus Magsafe Portable Charger comes with a **2-year warranty**. For any product issues or inquiries, please contact our friendly customer service. A detailed User Manual in PDF format is also available for download from the product's Amazon page or by clicking [here](#).