

[Manuals.plus](#) /

› [ANYSECU](#) /

› Talkpod N58 Plus Amateur Public Network Radio LTE POC 4G 2.4 inch Touch Screen Android 9.0 Unlocked Radio Work with ZELLO, Real PTT Platform User Manual

ANYSECU N58plus-Gree_US

Talkpod N58 Plus Amateur Public Network Radio User Manual

Model: N58plus-Gree_US | Brand: ANYSECU

INTRODUCTION

The Talkpod N58 Plus is an advanced amateur public network radio designed for reliable communication. Featuring a 2.4-inch touch screen and running on Android 9.0, this device supports LTE POC 4G connectivity, allowing it to work seamlessly with platforms like ZELLO and Real PTT. Its robust design includes scratch-resistance and anti-impact properties, making it suitable for various environments. The radio also offers GPS positioning, Wi-Fi, Bluetooth, and the ability to install a wide range of applications from the Google Play Store.

WHAT'S IN THE BOX

Upon unboxing your Talkpod N58 Plus, please verify that all the following components are included:

- Radio Body
- Battery
- Antenna
- Charger
- Belt Clip
- User Manual

SETUP

1. Battery Installation

Ensure the radio is powered off before installing the battery. Align the battery with the compartment on the back of the radio and gently press until it clicks into place. To remove, slide the battery release latch and lift the battery.

2. SIM Card Insertion

The N58 Plus supports dual SIM cards. Locate the SIM card slot, typically under the battery or on the side. Insert your 4G LTE SIM card(s) according to the diagram provided on the device or in the quick start guide. Ensure the SIM card is correctly oriented.

3. Initial Power On

Press and hold the power button (usually located on the side or top) until the screen illuminates. The device will boot up, displaying

the Android 9.0 operating system. Follow any on-screen prompts for initial setup, such as language selection and network configuration.



Figure 1: Front view of the Talkpod N58 Plus radio.

Functional hard power amateur new experience

Talkpod N58plus amateur POC walkie-talkie

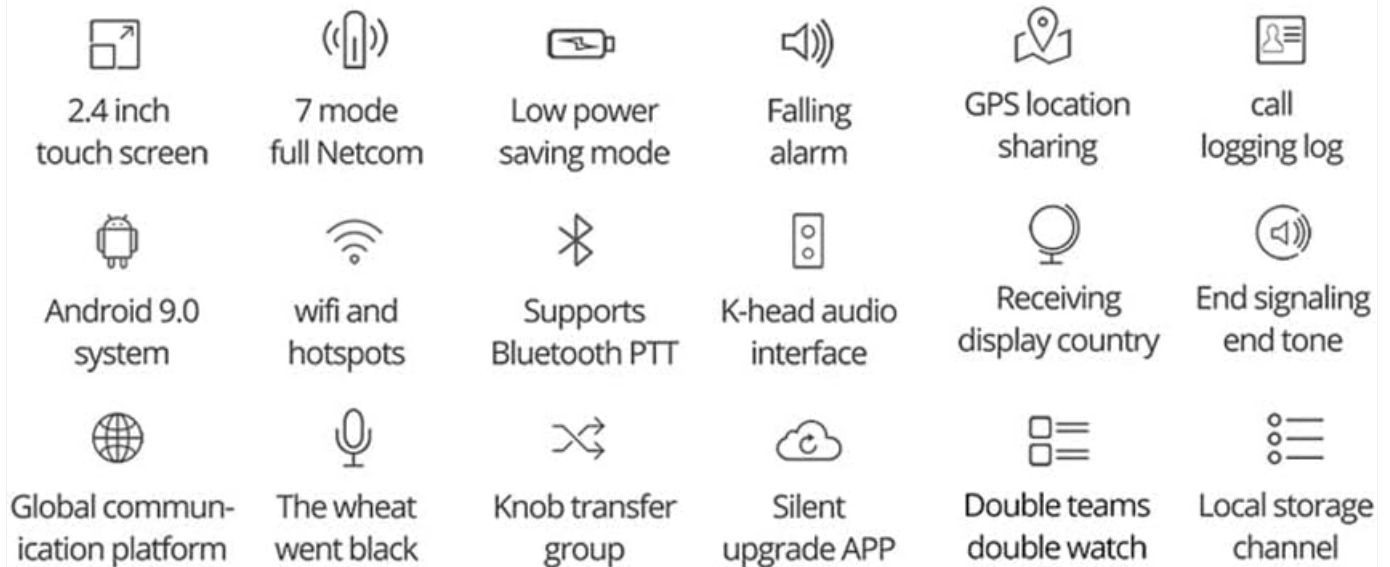


Figure 2: Detailed diagram of the Talkpod N58 Plus components and features.

OPERATING INSTRUCTIONS

1. Touch Screen Navigation

The N58 Plus features a responsive 2.4-inch touch screen for intuitive navigation. Swipe left or right to access different home screens, tap icons to open applications, and use standard Android gestures for back, home, and recent apps. The screen is designed for clarity and ease of use.

Talkpod N58plus amateur POC walkie-talkie

Joining links is
more interesting



Figure 3: The HD touch screen interface of the Talkpod N58 Plus.

2. Push-to-Talk (PTT) Functionality

The dedicated PTT button on the side of the radio allows for instant communication. Once configured with a PTT application (e.g., ZELLO, Real PTT), simply press and hold the PTT button to transmit your voice to your selected group or contact. Release the button to listen.

3. Application Usage

As an Android-based device, the N58 Plus supports a wide range of applications. You can download and install apps from the built-in Google Play Store or directly via APK files. Popular communication apps like ZELLO and Real PTT are commonly used for network radio operations. The device's open platform allows for extensive customization of your communication experience.

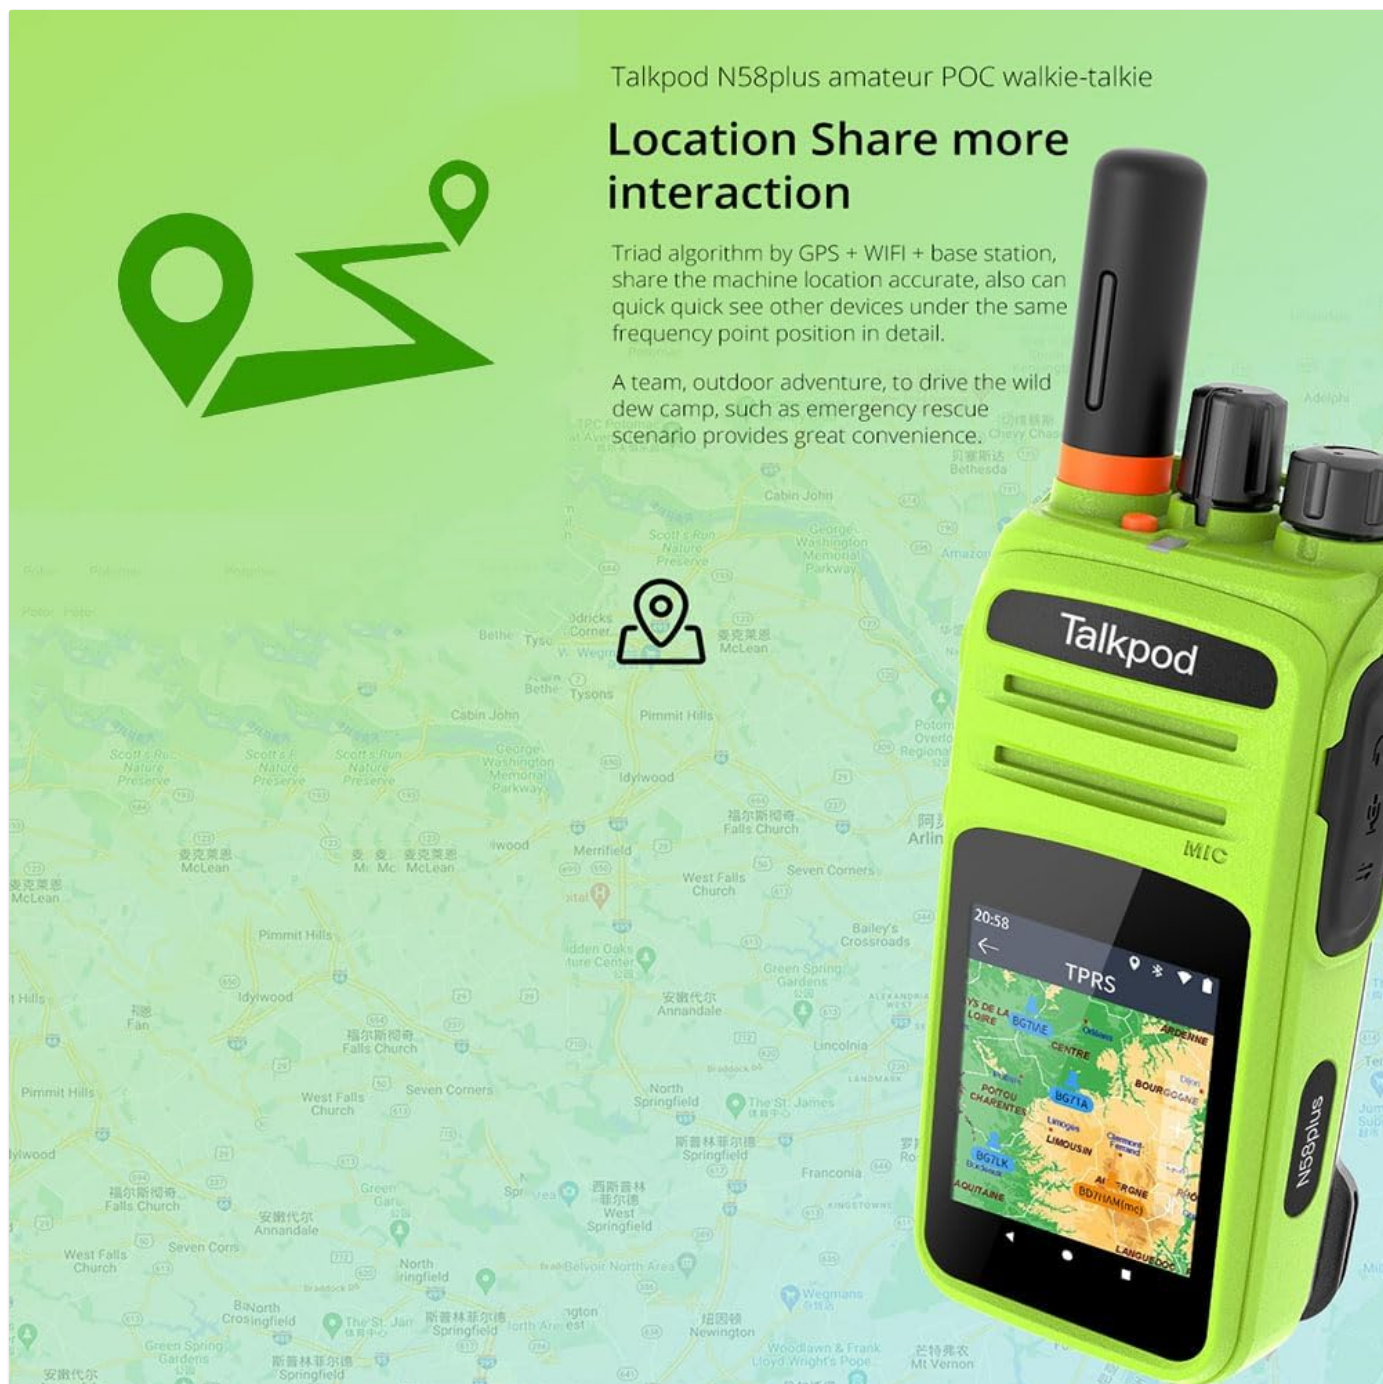


Figure 4: The Talkpod N58 Plus supports installing various applications.

4. Making Calls

The N58 Plus can function like a smartphone, allowing you to make and receive phone calls over the cellular network (if a valid SIM card with call plan is inserted). Use the standard phone application to dial numbers or search your contacts.

5. GPS Location Sharing

The integrated GPS functionality allows for precise location tracking and sharing. This feature is particularly useful for group coordination and safety in outdoor activities. Many PTT applications integrate with GPS to display user locations on a map.

Talkpod N58plus amateur POC walkie-talkie

The HD touch screen experience is good



Figure 5: GPS location sharing on the Talkpod N58 Plus display.

6. Official Product Video

Your browser does not support the video tag.

Video 1: Official product video demonstrating the Talkpod N58 Plus POC network radio's features, including touch screen navigation, application usage, and push-to-talk functionality.

MAINTENANCE

To ensure the longevity and optimal performance of your Talkpod N58 Plus, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to clean the radio's exterior. For stubborn dirt, a slightly damp cloth can be used, but ensure no moisture enters ports or openings. Avoid harsh chemicals or abrasive cleaners.
- **Battery Care:** Charge the battery fully before first use. Avoid overcharging or completely draining the battery frequently, as this can reduce its lifespan. Store the radio and battery in a cool, dry place when not in use for extended periods.

- **Port Protection:** Keep the Type-C charging port and audio data port free from dust and debris. Use the provided port covers if available.
- **Environmental Conditions:** While the radio is designed to be robust, avoid exposing it to extreme temperatures, direct sunlight for prolonged periods, or excessive moisture. The device is not water resistant.

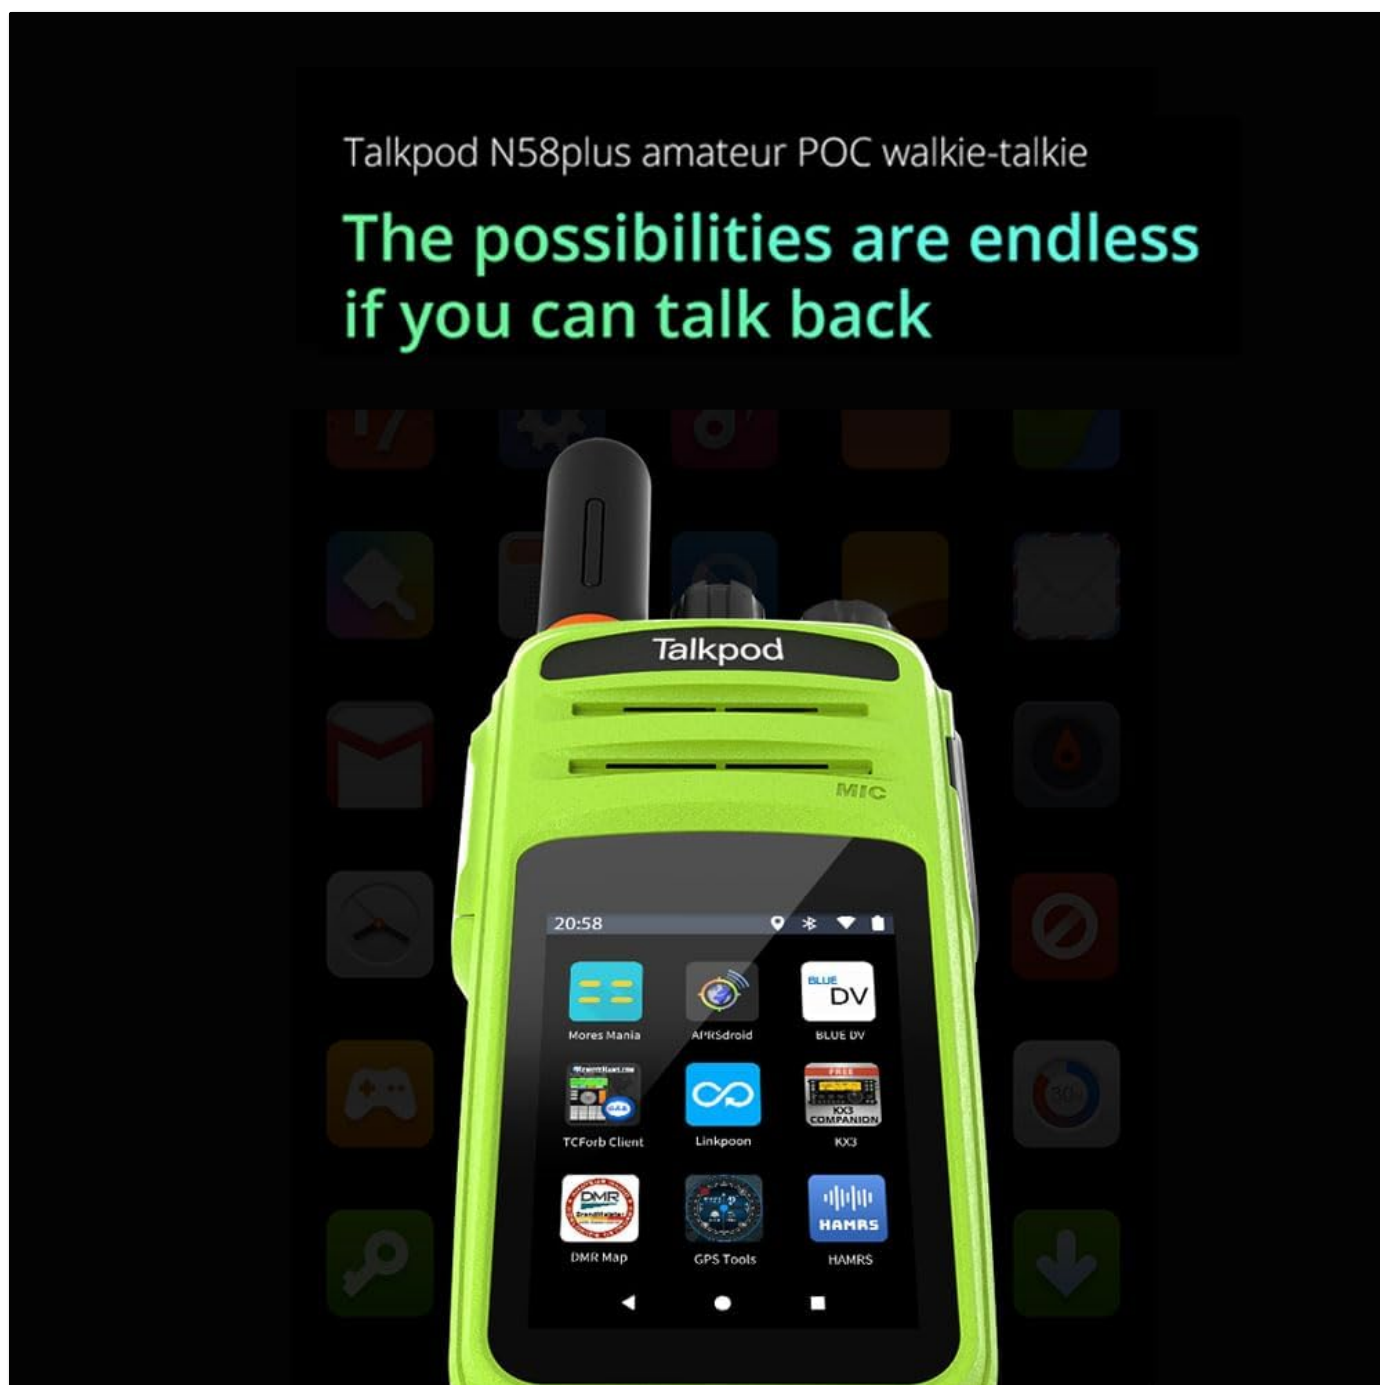


Figure 6: The Talkpod N58 Plus supports Type-C fast charging.

TROUBLESHOOTING

If you encounter issues with your Talkpod N58 Plus, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Device does not power on	Low battery; Battery not installed correctly; Faulty charger/cable	Charge the battery fully; Reinstall battery; Try a different charger/cable

Problem	Possible Cause	Solution
No network connection	No SIM card; SIM card not activated; Out of network coverage; Incorrect APN settings	Insert/reinsert SIM card; Contact your service provider; Move to an area with better coverage; Check APN settings in Android settings
PTT application not working	App not configured; No internet connection; App permissions not granted	Ensure app is logged in and configured; Verify Wi-Fi or cellular data is active; Grant necessary permissions in Android settings
Slow performance	Too many apps running; Low storage space; Outdated software	Close unused apps; Clear cache/uninstall unnecessary apps; Check for system updates in Android settings

SPECIFICATIONS

Key technical specifications for the Talkpod N58 Plus radio:

Feature	Detail
Item Weight	1.1 pounds
Package Dimensions	9.65 x 9.37 x 2.2 inches
Item Model Number	N58plus-Gree_US
Batteries	1 AA batteries required (included)
Manufacturer	Talkpod
Brand	ANYSECU
Color	Green
Number of Channels	1000
Special Feature	Dust Proof
Frequency Range	2G: Bands B2/B3/B5; 3G: Bands B1/B2/B4/B5/B8; 4G: Bands B1/B2/B3/B4/B5/B7/B12/B13/B17/B25/B26/B27
Talking Range Maximum	10000 Kilometer (Network Dependent)
Tuner Technology	POC (Push-to-Talk Over Cellular)
Water Resistance Level	Not Water Resistant
Date First Available	August 21, 2024

WARRANTY INFORMATION

The Talkpod N58 Plus radio body is covered by a 1-year manufacturer's warranty from the date of purchase. This warranty covers defects in materials and workmanship under normal use. Please retain your proof of purchase for warranty claims. The warranty

does not cover damage caused by misuse, accidents, unauthorized modifications, or exposure to water.

SUPPORT

For further assistance, technical support, or service inquiries regarding your Talkpod N58 Plus radio, please refer to the contact information provided by your retailer or the manufacturer. Additional resources, including FAQs and software updates, may be available on the official Talkpod website. Community forums and online groups dedicated to this radio model can also be valuable sources of information and peer support.

© 2024 ANYSECU. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question