

BORUIT V30

BORUIT V30 Rechargeable EDC Flashlight

MODEL: V30

Introduction

The BORUIT V30 is a versatile and compact Everyday Carry (EDC) flashlight designed for various applications, from daily tasks to outdoor emergencies. It features multiple light sources including white, red, and 365nm UV blacklight, along with a magnetic base, two-way clip, and power bank functionality. This manual provides detailed instructions for its safe and effective use.

What's in the Box

- V30 flat clip on flashlight
- USB-C Charging Cable
- Clip
- Hand Strap

Product Features

- **Triple Light Sources:** Main white light for general illumination, red LED for night vision preservation, and 365nm UV blacklight for detection tasks.
- **Versatile Mounting:** Equipped with a two-way clip and a strong magnetic base for hands-free operation.
- **Integrated Buzzer:** Built-in alarm for alerts or deterrence.
- **Power Bank Function:** USB-C port allows charging of external devices.
- **Multiple Modes:** 12 distinct lighting modes, including low, medium, high, turbo white light, red, UV, and various side light colors and flashing options.
- **Compact and Durable:** Measures 3.3 inches long, weighs 3.5 oz, constructed from aluminum alloy + PC for heat dissipation and durability.

- **180° Swivel Head:** Adjustable light head for directing illumination precisely where needed.

Setup

Charging the Flashlight

Before first use, fully charge the BORUIT V30 flashlight. Use the provided USB-C charging cable to connect the flashlight to a compatible USB power source. The charging indicator lights will show the charging status.



The BORUIT V30 flashlight features a USB-C port for convenient charging. Connect the included USB-C cable to charge the device.

Attaching the Hand Strap and Clip

Attach the included hand strap to the designated loop on the flashlight for secure carrying. The two-way clip can be attached to clothing, hats, or gear for hands-free use.

Operating Instructions

The BORUIT V30 features two main buttons for control: a power button for the main light and a function button for the side light and other features.

Main Light Operation (White, Red High, UV)



Visual guide for operating the main light modes, including white light brightness levels, red high light, and UV light.

- **Turn On/Off (Turbo Mode):** Long press the power button to activate Turbo mode. Release to turn off.

- **Switch Brightness (Low-Medium-High):** Double click the power button to turn on the main white light. Click again to cycle through Low, Medium, and High brightness settings. The flashlight has a memory function for these modes.
- **Red & UV Mode:** Triple click the power button to activate Red High light or UV light. Click again to switch between Red High and UV. Long press to turn off.

Side Light Operation (White, Red, Warm, Green, Red & Blue Flash, Beeping)




Visual guide for operating the side light modes, including various colors, flashing, and the beeping function.

- **Turn On/Off (Beeping Mode):** Long press the function button to activate the Beeping mode. Release to turn off.
- **Switch Modes (White, Red, Warm, Green, Red & Blue Flash):** Double click the function button to turn on the side light. Click again to cycle through White, Red, Warm, Green, and Red & Blue Flash modes. The flashlight has a memory function for these modes.

Special Functions

- **180° Swivel Head:** The flashlight head can be rotated 180 degrees to adjust the beam angle. This is useful when using the clip or magnetic base for hands-free lighting.
- **Magnetic Base:** The strong magnet on the tail allows the flashlight to be securely attached to metal surfaces, providing versatile hands-free illumination.
- **Power Bank Function:** Triple-click the side light button to enter USB output mode, allowing you to charge other devices via the built-in USB-C port. Triple-click the button again to exit this mode.

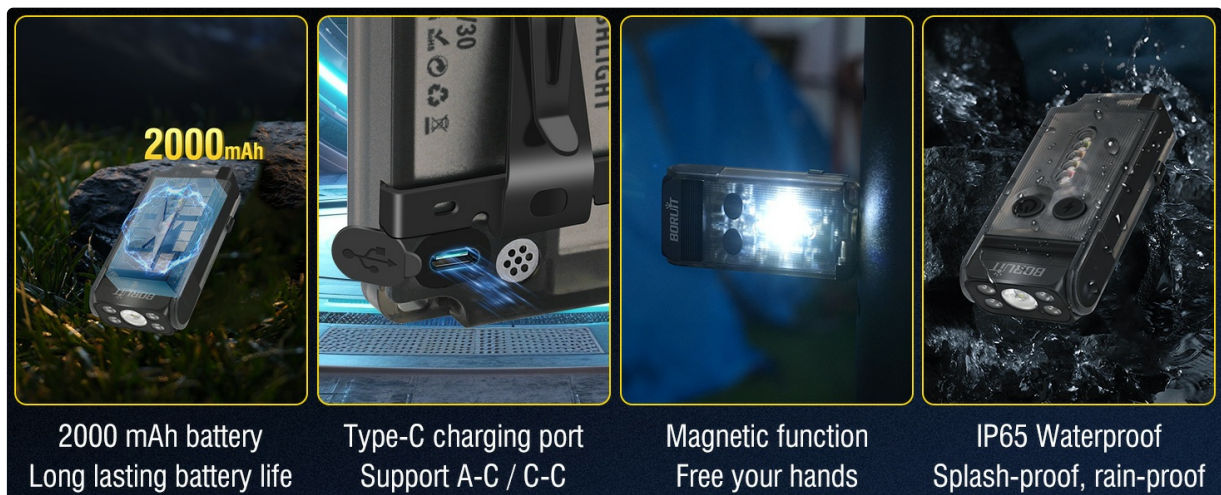

The 180° rotating head allows for flexible light direction when clipped or magnetically mounted.



The BORUIT V30 can function as a portable power bank to charge other USB-C compatible devices.

Maintenance

- **Cleaning:** Wipe the flashlight with a clean, soft cloth. Avoid using abrasive cleaners or solvents.
- **Battery Care:** To prolong battery life, charge the flashlight regularly, even if not in frequent use. Avoid fully discharging the battery for extended periods.
- **Storage:** Store the flashlight in a cool, dry place away from direct sunlight and extreme temperatures.

Troubleshooting

- **Flashlight not turning on:** Ensure the battery is charged. Connect to a USB-C power source and check the charging indicator.
- **Light dims during use:** This is a normal thermal regulation feature to prevent overheating and protect the LED and battery. Cycle through the modes to reactivate higher brightness if needed.
- **Power bank function not working:** Ensure the flashlight has sufficient charge. Triple-click the side light button to activate USB output mode.
- **Water ingress:** While the flashlight is waterproof (IP65 rated), avoid prolonged submersion. If water enters, turn off immediately and allow to dry completely before use.

Specifications

Feature	Detail
Brand	BORUIT
Model Number	V30
White Brightness	900 Lumens (Maximum)
Light Source Type	LED
Power Source	Battery Powered
Battery Type	Lithium Ion (1 included)
Runtime	Up to 22 hours

Feature	Detail
Water Resistance Level	Waterproof (IP65)
Material	ABS, Aluminum Alloy
Item Dimensions (L x W x H)	3.31" x 1.67" x 0.77"
Special Features	Multi-functional gear, two-way clip, sound warning function, power bank function

Official Product Video

This video provides an overview of the BORUIT V30 flashlight, demonstrating its features and functionality. It highlights the compact design, various light modes, and practical applications of the device.

Warranty and Support

The BORUIT V30 flashlight comes with a **1-year manufacturer's warranty**. For support or warranty claims, please contact the retailer or manufacturer directly with your purchase details.