

manuals.plus /

› [LAOPAO](#) /

› [LAOPAO 301E Rechargeable Sports Stopwatch User Manual](#)

LAOPAO 301E

LAOPAO 301E Rechargeable Sports Stopwatch User Manual

Model: 301E

1. INTRODUCTION

This manual provides detailed instructions for the operation and maintenance of your LAOPAO 301E Rechargeable Sports Stopwatch. Please read this manual thoroughly to ensure proper use and to maximize the functionality of your device. This stopwatch is designed for various timing needs in sports, training, and daily activities.

2. PRODUCT OVERVIEW

The LAOPAO 301E is a multi-functional digital stopwatch featuring a large display, backlight, and a rechargeable battery. It is equipped with various modes to assist coaches, referees, athletes, and anyone requiring precise timing.



Figure 2.1: Front view of the LAOPAO 301E Stopwatch, showing the large display and button layout.

Key Features:

- **Rechargeable Battery:** Convenient magnetic charging eliminates the need for frequent battery replacement.
- **200 Lap Memory:** Stores up to 200 lap and split times for detailed performance tracking.

- **Bright Backlight:** Ensures clear visibility of the display in low-light conditions or bright sunshine.
- **Multi-Functionality:** Includes Stopwatch, Timer, Countdown, Alarm, Pacer, and Temperature display modes.
- **1/1000 Second Accuracy:** Provides precise timing for critical events.
- **Large Display:** Easy-to-read digits for quick data interpretation.
- **Anti-slip Design:** Ergonomic design with side grips for secure handling.
- **Water Resistant:** Designed to withstand splashes and light rain.

3. CONTROLS AND DISPLAY

Familiarize yourself with the buttons and display elements of your stopwatch:

- **START/STOP Button:** Initiates and pauses timing functions.
- **SPLIT/RESET Button:** Records lap/split times and resets the stopwatch.
- **RECALL/SET Button:** Accesses memory records and adjusts settings.
- **MODE Button:** Switches between different operating modes (Stopwatch, Timer, Countdown, Alarm, Pacer, Time/Date).
- **Backlight Icon:** Indicates backlight activation.
- **200 MEMORIES:** Indicates the capacity for lap/split records.
- **TEMPERATURE:** Displays current ambient temperature.
- **WATER RESIST:** Indicates water resistance feature.



Figure 3.1: Detailed view of the stopwatch display and labeled buttons.

4. SETUP

4.1 Initial Charging

Before first use, fully charge the stopwatch. Connect the magnetic charging cable to the charging socket on the side of the stopwatch and the USB end to a power source (e.g., computer USB port, USB wall adapter). The charging indicator on the display will show charging status.



Figure 4.1: The stopwatch connected to its magnetic charging cable.

4.2 Power On/Off

To power on the stopwatch, press and hold the **MODE** button for a few seconds. To power off, press and hold the **MODE** button again until the display turns off. This feature can be customized in settings.

4.3 Setting Time and Date

1. In Time mode (default display), press and hold the **RECALL/SET** button.
2. The first setting (e.g., hour) will begin to flash. Use the **START/STOP** button to adjust the value and the **SPLIT/RESET** button to move to the next setting (minute, second, year, month, day).
3. Once all settings are adjusted, press the **RECALL/SET** button to confirm and exit the setting mode.

5. OPERATING MODES

Press the **MODE** button to cycle through the different functions:

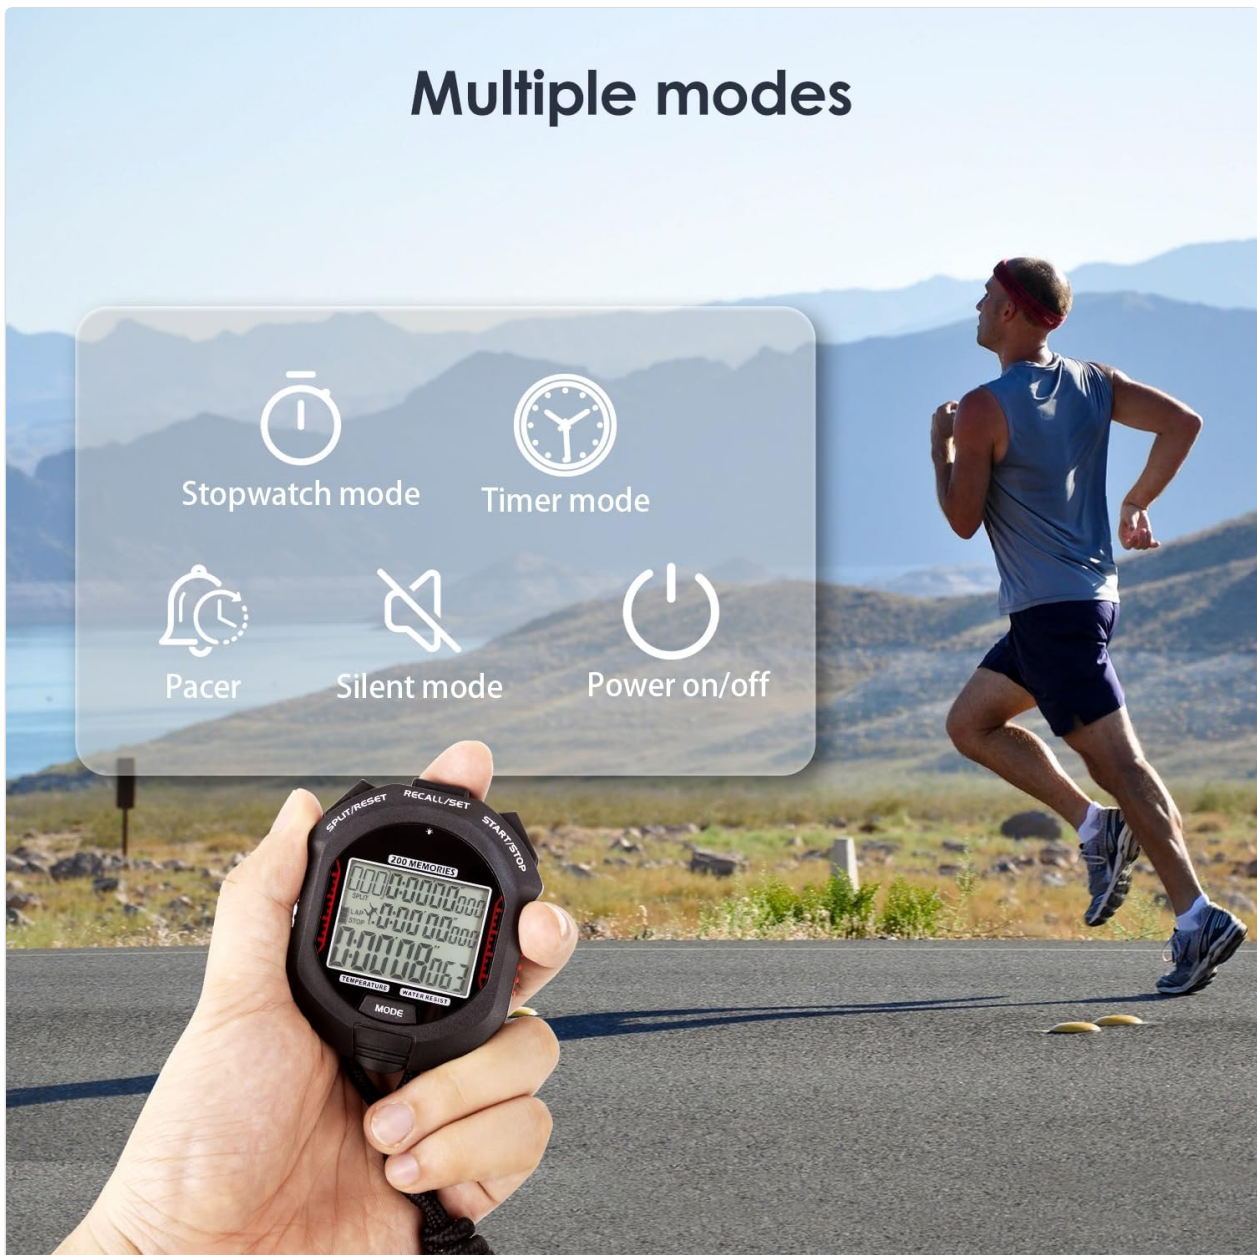


Figure 5.1: Visual representation of the various operating modes available on the stopwatch.

5.1 Stopwatch Mode

1. From Time mode, press **MODE** until 'STOPWATCH' or a similar indicator appears.
2. Press **START/STOP** to begin timing.
3. Press **START/STOP** again to pause timing.
4. Press **SPLIT/RESET** to reset the stopwatch to zero.

5.2 Lap/Split Function

While the stopwatch is running:

1. Press **SPLIT/RESET** to record a lap time. The display will momentarily show the lap time while the main

timer continues to run in the background.

2. Press **SPLIT/RESET** again to return to the running time display.
3. To view recorded lap/split times, pause the stopwatch and press **RECALL/SET**. Use **START/STOP** and **SPLIT/RESET** to navigate through the 200 memory records.

5.3 Timer Mode

This mode functions as a general-purpose timer.

1. Navigate to Timer mode using the **MODE** button.
2. Press **START/STOP** to begin counting up.
3. Press **START/STOP** again to pause.
4. Press **SPLIT/RESET** to reset.

5.4 Countdown Mode

Set a specific time for the stopwatch to count down from.

1. Navigate to Countdown mode using the **MODE** button.
2. Press and hold **RECALL/SET** to enter setting mode. Adjust hours, minutes, and seconds using **START/STOP** and **SPLIT/RESET**. Press **RECALL/SET** to confirm.
3. Press **START/STOP** to begin the countdown.
4. An alarm will sound when the countdown reaches zero.

5.5 Alarm Mode

Set a daily alarm.

1. Navigate to Alarm mode using the **MODE** button.
2. Press and hold **RECALL/SET** to enter setting mode. Adjust the alarm time.
3. Press **RECALL/SET** to confirm.
4. To activate/deactivate the alarm, press **START/STOP** while in Alarm mode. An alarm icon will appear/disappear.

5.6 Pacer Mode

The Pacer mode helps maintain a consistent rhythm or pace.

1. Navigate to Pacer mode using the **MODE** button.
2. Press and hold **RECALL/SET** to set the desired pace (e.g., beats per minute).
3. Press **START/STOP** to begin the pacer function. The stopwatch will emit beeps at the set interval.

5.7 Temperature Display

The stopwatch displays the ambient temperature. This is typically shown in Time mode or can be accessed via a specific display segment.

6. CUSTOMIZATION

The LAOPAO 301E allows for flexible adjustment of several features:

6.1 Backlight

The backlight can be activated for improved visibility. In any mode, press the dedicated backlight button (often indicated by a light bulb icon or integrated with another button via a short press) to turn it on. The backlight may have an auto-off feature after a few seconds to conserve battery.

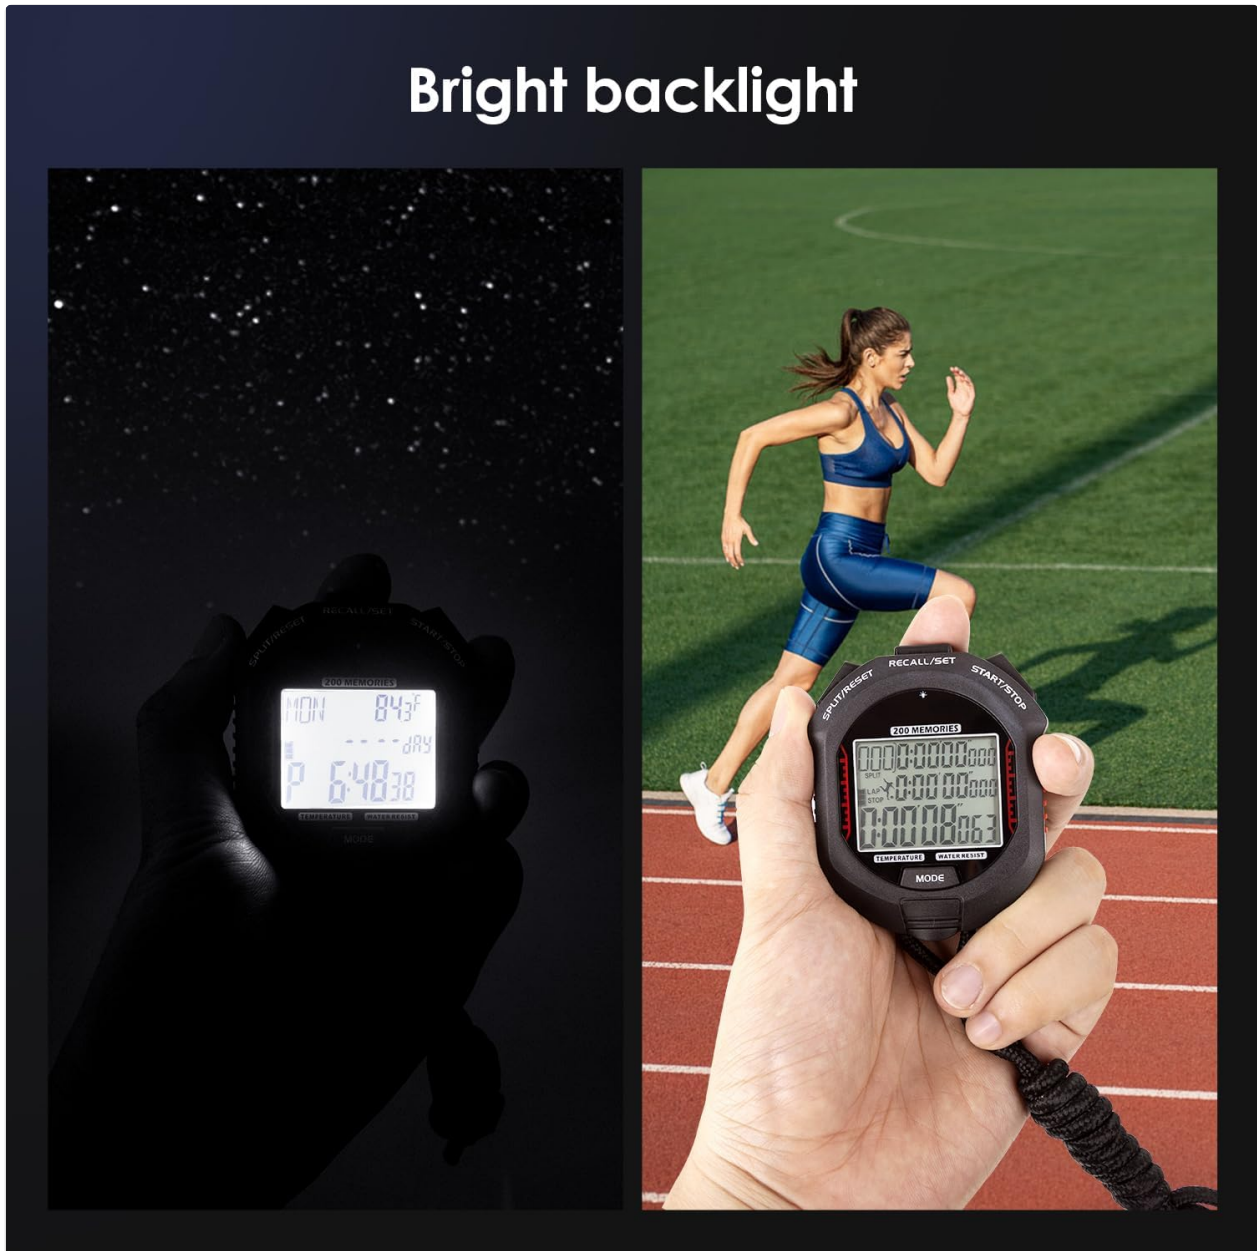


Figure 6.1: Comparison of the stopwatch display with and without the bright backlight.

6.2 Keytone (Button Beep)

The audible feedback when pressing buttons can be turned on or off. This setting is usually found within the general settings menu, accessible by holding the **RECALL/SET** button in Time mode or a dedicated settings mode.

6.3 Alarm Sound

The alarm sound can be enabled or disabled independently of the alarm time setting. Refer to section 5.5 for alarm activation/deactivation.

7. MAINTENANCE

7.1 Charging

Recharge the stopwatch when the battery indicator shows low power. Use only the provided magnetic charging cable. A full charge typically takes a few hours. Avoid overcharging for extended periods.

7.2 Cleaning

Wipe the stopwatch with a soft, dry cloth. For stubborn dirt, a slightly damp cloth can be used. Do not use harsh chemicals or abrasive cleaners, as these can damage the display or casing.

7.3 Storage

Store the stopwatch in a cool, dry place away from direct sunlight and extreme temperatures. If storing for an extended period, ensure it has a partial charge to maintain battery health.

8. TROUBLESHOOTING

- **Stopwatch not turning on:** Ensure the battery is charged. Connect to the charger and try again.
- **Display is blank or frozen:** Try pressing and holding the **MODE** button for 10 seconds to perform a soft reset. If the issue persists, ensure it is charged.
- **Buttons are unresponsive:** Ensure the stopwatch is not in a locked mode (if applicable, check manual for lock function). A soft reset may resolve temporary unresponsiveness.
- **Inaccurate timing:** Ensure the stopwatch is in the correct mode. If issues persist, contact customer support.
- **Charging issues:** Verify the magnetic cable is securely connected to both the stopwatch and the power source. Try a different USB port or adapter.

9. SPECIFICATIONS

Feature	Specification
Model Number	301E
Brand	LAOPAO
Material	Plastic
Color	Black
Product Dimensions	5.83"D x 1.57"W x 3.35"H (14.8cm D x 4cm W x 8.5cm H)
Item Weight	3.84 ounces (0.11 kg)

Lap Memory	200 Laps
Accuracy	1/1000 Second
Battery Type	1 Lithium Ion (included)
Charging Method	Magnetic USB Cable
Display Size	5.83 Inches (diagonal)



Figure 9.1: Dimensions of the LAOPAO 301E Stopwatch.

10. WARRANTY AND SUPPORT

LAOPAO products are manufactured to high-quality standards. For warranty information, please refer to the product packaging or the official LAOPAO website. If you encounter any issues or require technical assistance, please contact LAOPAO customer support through the retailer where the product was purchased or via the contact information provided on the official brand channels.

