

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

- › [Coolaado](#) /
- › [Coolaado Bluetooth Mobile Game Controller User Manual](#)

Coolaado D6DP

Coolaado Bluetooth Mobile Game Controller User Manual

Model: D6DP

1. INTRODUCTION

This manual provides detailed instructions for the Coolaado Bluetooth Mobile Game Controller, designed to transform your smartphone into a portable gaming console. It offers precise controls and an ergonomic design for an enhanced gaming experience across various platforms.



Image: The Coolaado Bluetooth Mobile Game Controller in white, holding a smartphone that displays icons for Xbox Game Pass, PS Remote Play, Steam Link, and various mobile games, illustrating its primary function.

2. PACKAGE CONTENTS

Please verify that all items are present in your package:

- Coolaado Bluetooth Mobile Game Controller (D6DP)
- USB-C Charging Cable
- User Manual

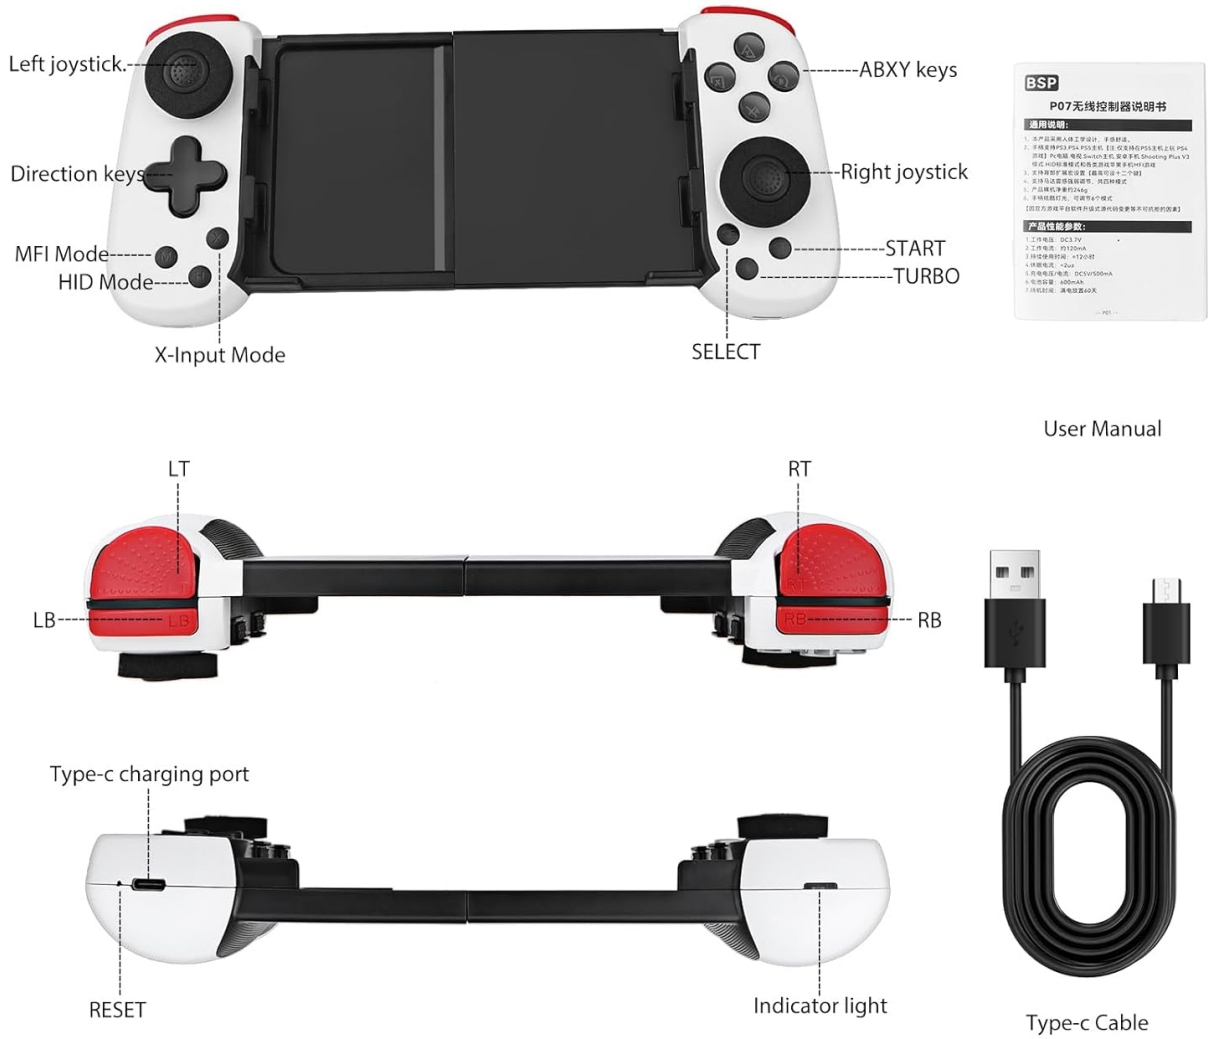


Image: A detailed view of the Coolaado controller, a USB-C charging cable, and the included user manual, laid out on a surface.

3. PRODUCT DIAGRAM

Familiarize yourself with the various components of your Coolaado controller:

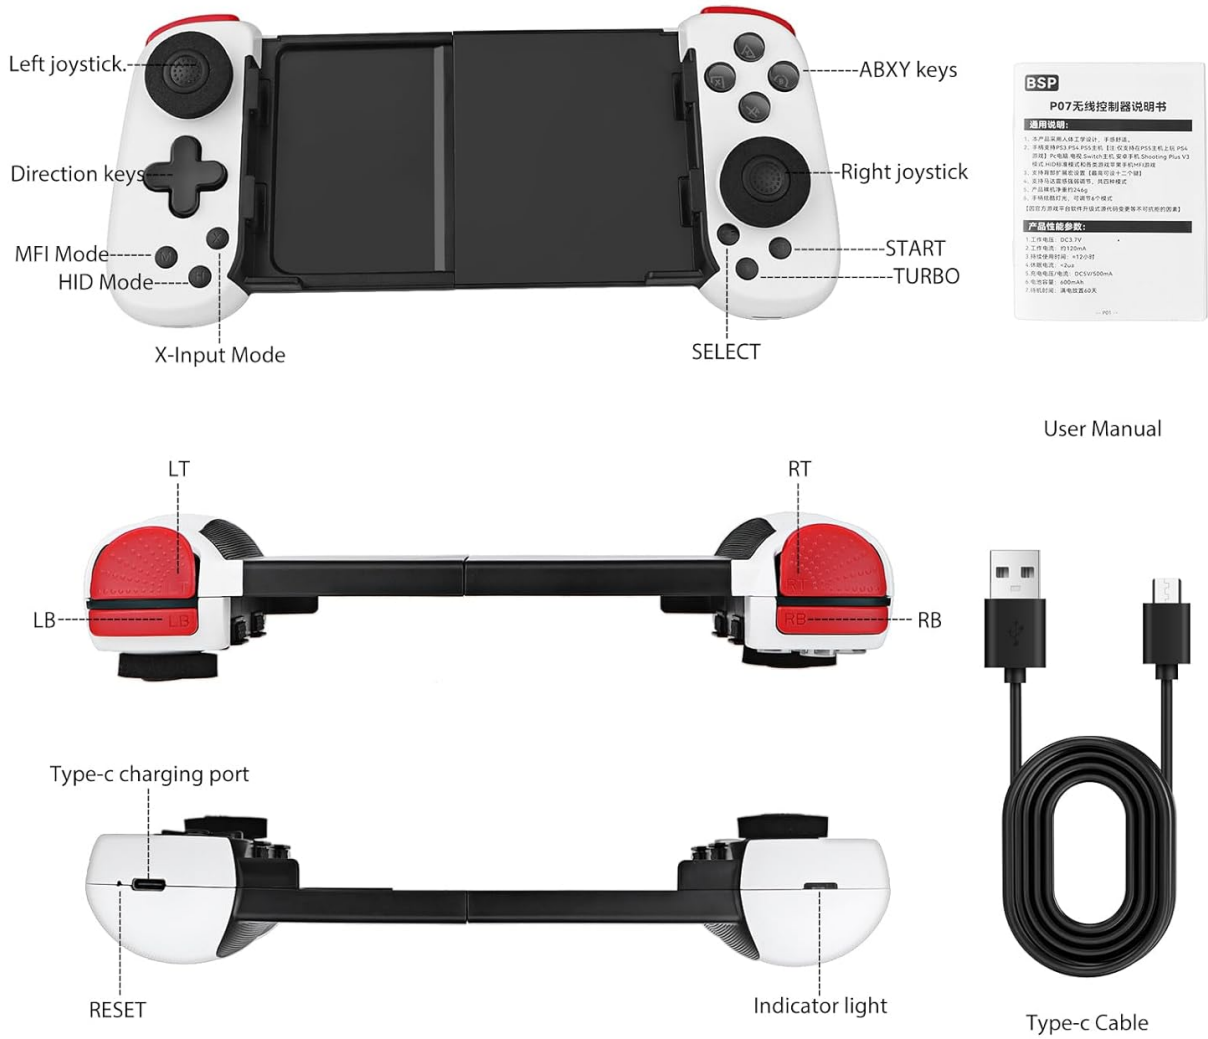


Image: A diagram of the controller with labels pointing to the Left joystick, Direction keys, MFI Mode button, HID Mode button, X-Input Mode button, ABXY keys, Right joystick, START button, SELECT button, TURBO button, LT, RT, LB, RB, Type-C charging port, RESET hole, and Indicator light.

- **Left Joystick:** For directional control.
- **Direction Keys (D-pad):** For precise directional input.
- **MFI Mode Button:** For iOS device connection.
- **HID Mode Button:** For Android device connection.
- **X-Input Mode Button:** For PC/Windows device connection.
- **ABXY Keys:** Standard action buttons.
- **Right Joystick:** For camera control or secondary directional input.
- **START Button:** Game start/pause.
- **SELECT Button:** Game menu/options.
- **TURBO Button:** Activates and adjusts turbo function.
- **LT/RT (Left/Right Triggers):** Analog triggers for precise input.
- **LB/RB (Left/Right Bumpers):** Digital shoulder buttons.
- **Type-C Charging Port:** For charging the controller and wired connection.
- **RESET Hole:** For resetting the controller (use a thin needle).

- **Indicator Light:** Displays connection status and charging.

4. SETUP AND CONNECTION

The Coolaado controller supports various operating systems. Follow the instructions below for your specific device.

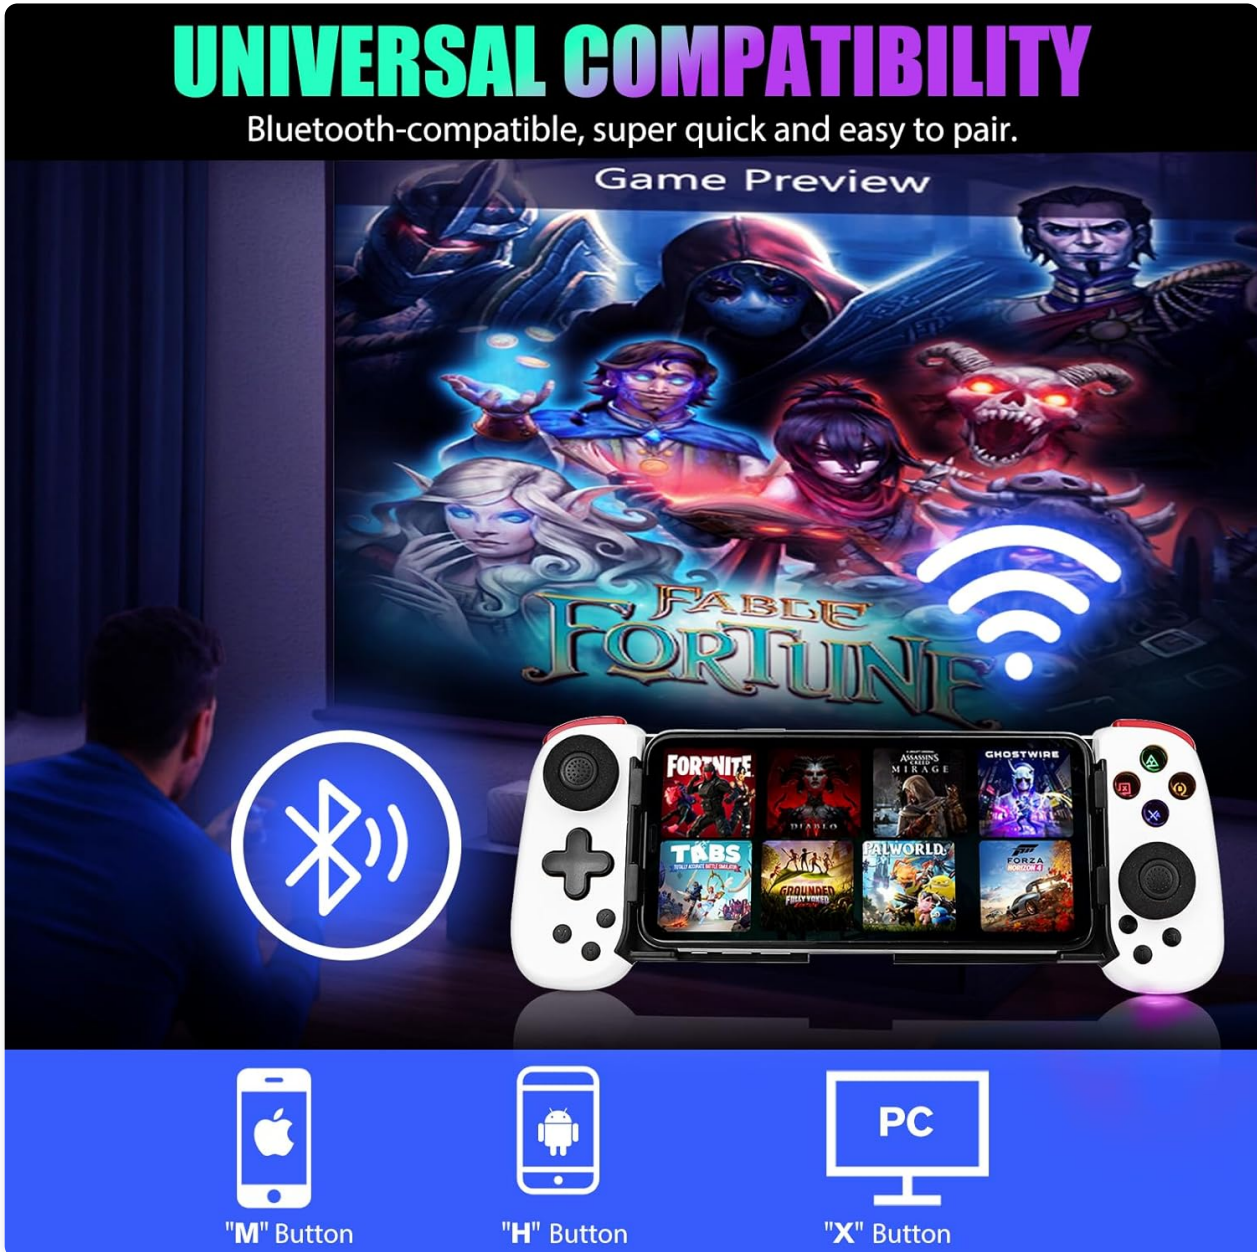


Image: An illustration highlighting the 'M' button for iOS, 'H' button for Android, and 'X' button for PC, indicating universal compatibility and pairing methods.

4.1. Connecting to iOS Devices (iPhone/iPad)

1. Ensure your controller is charged.
2. Long press the **"M" button** (MFI Mode) on the left side of the controller for 3 seconds.
3. The indicator light will flash purple, indicating it is in pairing mode.
4. On your iOS device, go to **Settings > Bluetooth**.

5. Look for "**DUALSHOCK 4 Wireless Controller**" in the list of available devices and tap to connect.
6. Once connected, the indicator light will remain solid.

Your browser does not support the video tag.

Video: A demonstration of connecting the Cooolaado controller to an iOS device (iPad). It shows pressing the 'M' button, the indicator light flashing purple, and then pairing with "DUALSHOCK 4 Wireless Controller" in Bluetooth settings, followed by launching a game.

4.2. Connecting to Android Devices

1. Ensure your controller is charged.
2. Long press the "**H**" button (HID Mode) on the left side of the controller for 3 seconds.
3. The indicator light will flash orange, indicating it is in pairing mode.
4. On your Android device, go to **Settings > Bluetooth**.
5. Look for "**D6DP**" in the list of available devices and tap to connect.
6. Once connected, the indicator light will remain solid.

Your browser does not support the video tag.

Video: A demonstration of connecting the Cooolaado controller to an Android smartphone. It illustrates pressing the 'H' button, the indicator light flashing orange, and then pairing with "D6DP" in Bluetooth settings, followed by launching a game.

4.3. Connecting to PC/Windows Devices

1. Ensure your controller is charged.
2. Long press the "**X**" button (X-Input Mode) on the left side of the controller for 3 seconds.
3. The indicator light will flash, indicating it is in pairing mode.
4. On your PC, go to **Bluetooth & other devices settings**.
5. Select "**Add Bluetooth or other device**" and choose Bluetooth.
6. Look for the controller in the list and connect.
7. Alternatively, connect the controller directly to your PC using the USB-C cable for a wired connection.

5. OPERATING INSTRUCTIONS

5.1. Adjustable TURBO Function

The TURBO function allows for rapid, repeated button presses. To activate and adjust:

- Press the **TURBO button** once to activate.
- While holding the **TURBO button**, press the **A button** repeatedly to cycle through turbo speeds: 8 shots/s, 15 shots/s, and 25 shots/s.
- Press the **TURBO button** again to deactivate.

5.2. Dual Motor Vibration Adjustment

Adjust the intensity of the controller's vibration feedback:

- Hold down the **TURBO button**.

- Flick the **Right Joystick** up or down to increase or decrease vibration intensity.

5.3. ABXY Key Lights

To turn the ABXY key lights on or off:

- Press **TURBO + L3** (press down the Left Joystick).



Image: An illustration demonstrating the adjustable turbo speeds (8, 15, 25 shots/s) and the dual motor vibration feature of the controller.

6. COMPATIBILITY

The Coolaado controller offers broad compatibility for a versatile gaming experience:

- **Operating Systems:** Compatible with iOS 13.0+, Android 6.0+, and Windows 10+ system devices.
- **Cloud Gaming:** Supports Xbox Cloud, GeForce Now, and Luna.
- **Remote Play:** Supports PS Remote Play, Xbox app, and Steam Link.

- **Device Size:** Accommodates smartphones and tablets with a length between 12.7 cm (5 inches) and 18.1 cm (7.2 inches).

PLAY CONSOLE GAMES ON YOUR PHONE

Provide a console-like experience on the go!



  
IOS Android PC


 GAMEPASS  PS Remote Play  SWITCH

Xbox/360/One/Series X/S PS3/PS4/PS5 Switch/Lite/OLED

 Arcade  Steam Link  GET IT ON Google Play  Luna  Rainway

Image: A graphic illustrating the controller's compatibility with iOS, Android, and PC, and its support for platforms such as Xbox Game Pass, PlayStation Remote Play, Nintendo Switch, Arcade, Steam Link, Google Play, and Luna.

ERGONOMIC STRUCTURE

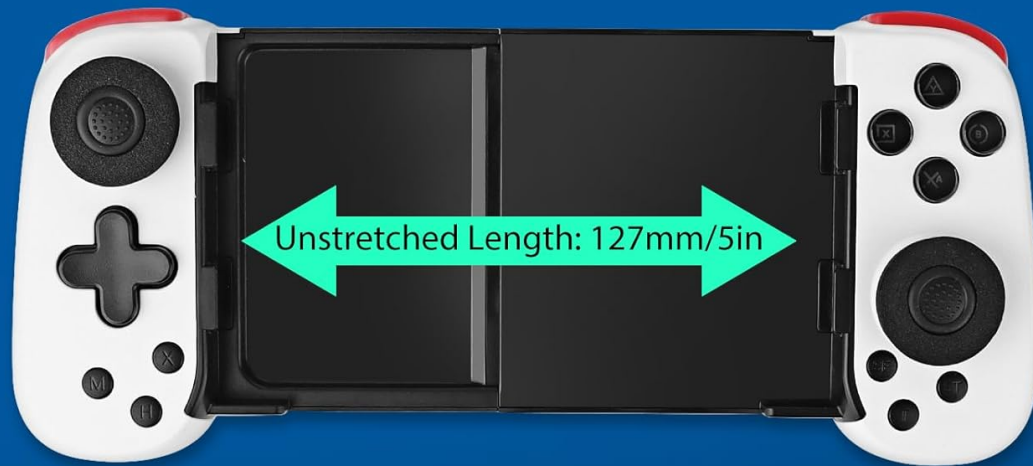

Comfortable Grip



Anti-slip Dock



Sturdy Holders



Image: A diagram showcasing the ergonomic structure of the controller, highlighting its comfortable grip, anti-slip dock, sturdy holders, and its retractable design that fits devices from 127mm (5 inches) to 181mm (7 inches) in length.

7. BATTERY AND CHARGING

The controller is equipped with a long-lasting battery for extended gaming sessions.

- **Battery Capacity:** Built-in 350mAh rechargeable battery.
- **Playing Time:** Provides over 12 hours of continuous game playing on a full charge.
- **Charging Time:** Fully charges within 2-3 hours via USB-C.
- **Charging:** Connect the included USB-C cable to the controller's Type-C charging port and a power source.

12H
Playing Time

350mAh
Battery

2-3H
Charging Time

Designed for long gaming sessions
No delay, no dead & no drift, provide tactile feedback and precision.

Image: A visual representation of the controller's battery features, indicating 12 hours of playing time, a 350mAh battery, and a 2-3 hour charging time via USB-C.

8. TROUBLESHOOTING

If you encounter any issues with your controller, try the following solutions:

- **Controller Reset:** If the controller experiences abnormal situations (e.g., inability to connect/charge, joystick offset), locate the small '**RESET**' hole on the left side near the USB-C charging port. Use a thin needle or paperclip to gently press the button inside. This will restart the controller and can resolve most non-quality problems.
- **Re-pairing:** After resetting, delete the memorized Bluetooth name of the controller from your phone's Bluetooth settings and attempt to reconnect following the setup instructions.

9. SPECIFICATIONS

Feature	Specification
Model	D6DP
Connectivity	Bluetooth 5.0 EDR/Ble, USB-C (wired)
Battery Capacity	350mAh Lithium Ion
Playing Time	Over 12 hours
Charging Time	2-3 hours
Supported Phone Length	12.7 cm - 18.1 cm (5 inches - 7.2 inches)
Item Weight	8.47 ounces (approx. 240g)
Dimensions (Package)	8.54 x 3.98 x 1.93 inches

10. WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the contact details provided on the product packaging or the official Coolaado website. Keep your purchase receipt for any warranty claims.