

FIMEI JMY9020

FIMEI LED Saturn Pendant Light JMY9020 User Manual

Model: JMY9020

1. INTRODUCTION

Thank you for choosing the FIMEI LED Saturn Pendant Light. This manual provides essential information for the safe installation, operation, and maintenance of your new lighting fixture. Please read this manual thoroughly before installation and retain it for future reference.

2. PRODUCT FEATURES

- **Saturn Ring Design:** Features a central round light surrounded by a rotatable Saturn-like ring for multi-angle illumination.
- **Flexible Lighting:** The side ring rotates 330 degrees, allowing for customizable light direction.
- **Stepless Dimming & 3 Color Modes:** Adjust brightness and choose between warm yellow (3000K), natural warm light (4500K), and cool white (6000K).
- **Versatile Dual-Control:** Independently adjust colors and brightness of the outer ring and central light. Save customized settings using M1 or M2 buttons. Control via remote or wall switch.
- **Adjustable Height:** The suspension cable length can be adjusted to suit different ceiling heights.
- **Durable Materials:** Constructed from iron and polycarbonate with a matte black finish.

3. PACKAGE CONTENTS

Verify that all components are present and undamaged before beginning installation.

Package List



Image: Package contents of the FIMEI LED Saturn Pendant Light, showing the light fixture, remote control, and various installation accessories.

- LED Saturn Pendant Light Fixture
- Remote Control (requires 2 AAA batteries, not included)
- Mounting Plate
- Screws and Wall Anchors
- Wire Connectors
- User Manual

4. SAFETY INFORMATION

To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, please read all warnings and instructions included with and on the fixture box and all fixture labels.

- Always turn off the power supply at the main circuit breaker before installation, removal, or maintenance.
- Consult a qualified electrician if you are unsure about the installation process.

- Do not install the fixture on a wet surface or near water.
- Ensure all electrical connections are secure and comply with local codes and ordinances.
- Do not attempt to modify the fixture in any way.

5. SETUP & INSTALLATION

Follow these steps for proper installation. If you are not comfortable with electrical work, it is recommended to hire a professional electrician.

1. **Prepare for Installation:** Turn off power at the circuit breaker. Gather necessary tools (screwdriver, wire strippers, ladder).
2. **Remove Mounting Plate:** Unscrew and remove the mounting plate from the canopy of the pendant light.
3. **Secure Mounting Plate:** Attach the mounting plate to the ceiling junction box using the provided screws. Ensure it is securely fastened.
4. **Adjust Cable Length:** Loosen the screw on the side of the canopy to adjust the suspension cable to your desired length. Once adjusted, tighten the screw to secure the cable.
5. **Electrical Connections:** Connect the fixture's wires to the corresponding household wires (live to live, neutral to neutral, ground to ground) using the provided wire connectors.
6. **Attach Canopy:** Align the grooves on the canopy with the screws on the mounting plate. Push the canopy up and twist to secure it. Tighten the screws to complete the installation.

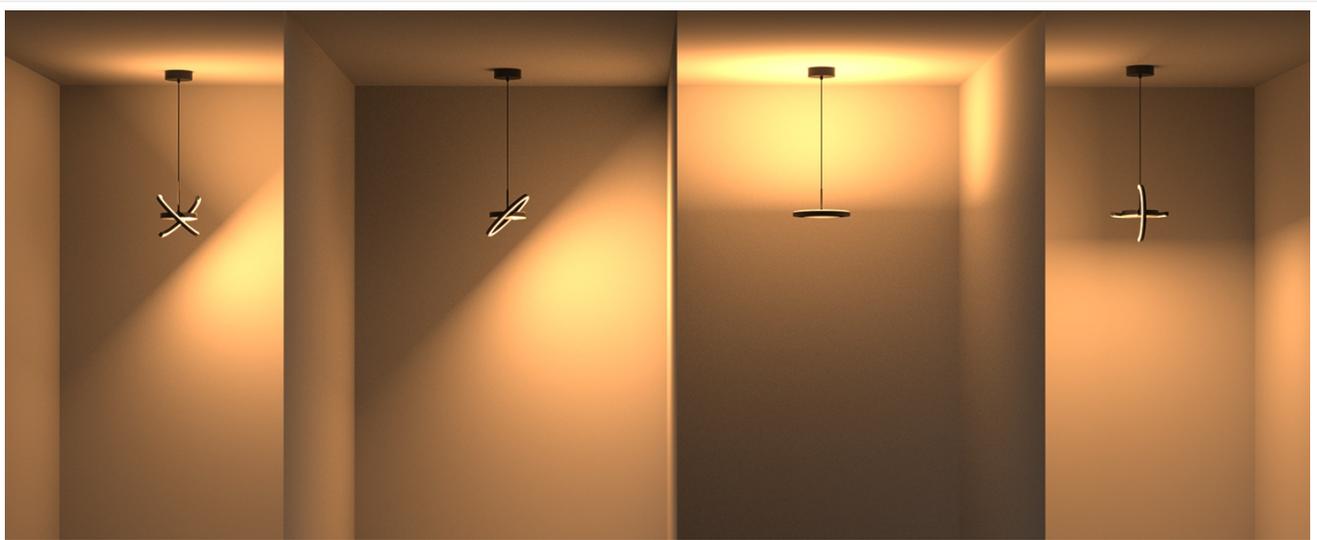


Image: Step-by-step guide for assembling and installing the pendant light, illustrating how to secure the mounting plate, adjust cable height, connect wires, and attach the canopy.

Your browser does not support the video tag.

Video: An installation guide for the FIMEI LED Saturn Pendant Light, demonstrating the process of unpacking, adjusting the cable, and mounting the fixture to the ceiling.

6. OPERATING INSTRUCTIONS

Your FIMEI LED Saturn Pendant Light offers versatile control options to customize your lighting experience.

6.1 Remote Control Operation

The included remote control provides comprehensive control over your pendant light.

Two-way Control System



Wall Switch

Change light color with quick ON/OFF presses.

Remote Control

-  2*AAA (Not Included)
-  Memory Function
-  Custom Setting Function
-  Separate Light Control

Craft Your Ambiance: Tailor colors & brightness for outer ring & central light independently. Save settings with **M1 or M2 button.**

Image: The remote control for the pendant light, illustrating its various buttons for adjusting brightness, color temperature, and controlling the inner and outer light rings independently.

- **Power On/Off:** Press the power button to turn the light on or off.
- **Brightness Adjustment:** Use the brightness buttons to increase or decrease the light intensity (stepless dimming).
- **Color Temperature Selection:** Cycle through 3000K (warm yellow), 4500K (natural warm light), and 6000K (cool white) using the color temperature buttons.
- **Independent Light Control:** The remote allows separate control of the central light and the outer ring.
- **Memory Functions (M1/M2):** Save your preferred lighting combinations (brightness and color temperature for both inner and outer lights) using the M1 and M2 buttons for quick recall.

6.2 Wall Switch Operation

You can also change the light color with quick ON/OFF presses using your standard wall switch.

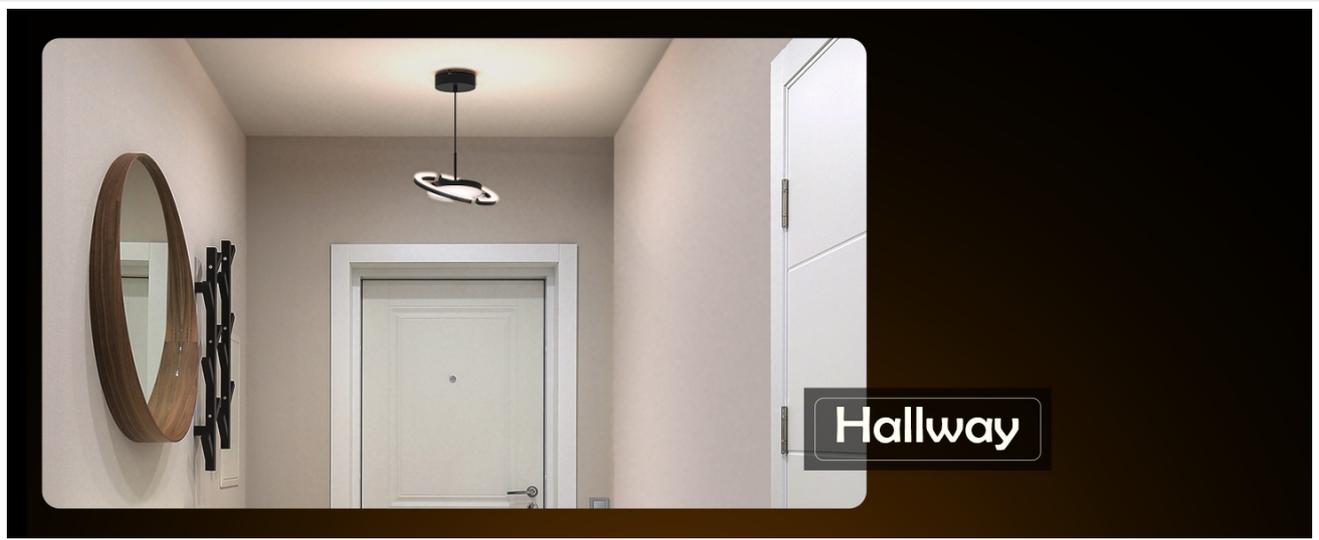


Image: A hand pressing a wall switch, demonstrating how to change the light color of the pendant light by quickly toggling the switch.

6.3 Adjusting the Saturn Ring

The outer ring of the pendant light can be manually rotated 330 degrees to change the light's appearance and direction.

Unique Saturn Ring Design & Adjustable Shape



Image: The pendant light with its outer ring adjusted, showcasing the unique and customizable Saturn ring design.

Your browser does not support the video tag.

Video: A demonstration of the FIMEI LED Saturn Pendant Light's unique design and how its outer ring can be rotated to change its appearance.

7. MAINTENANCE

Regular maintenance ensures the longevity and optimal performance of your pendant light.

- **Cleaning:** Turn off the power before cleaning. Use a soft, dry cloth to wipe the fixture. Do not use abrasive cleaners or solvents, as they may damage the finish.
- **Bulb Replacement:** This fixture uses integrated LED lighting and does not require bulb replacement.
- **Inspection:** Periodically check for any loose connections or damage to the wiring or fixture components.

8. TROUBLESHOOTING

If you encounter any issues with your FIMEI LED Saturn Pendant Light, refer to the following troubleshooting guide:

Problem	Possible Cause	Solution
Light does not turn on	No power supply	Check circuit breaker and wall switch. Ensure power is on.
	Loose wiring connection	Turn off power at the breaker. Check and secure all wire connections.
Remote control not working	Dead batteries	Replace AAA batteries in the remote control.
	Remote not paired	Refer to remote control pairing instructions (if applicable, not detailed in provided data).
Light flickers or dims unexpectedly	Unstable power supply	Consult an electrician to check household wiring.
	Loose connection	Turn off power at the breaker. Check and secure all wire connections.

9. SPECIFICATIONS

Attribute	Detail
Brand	FIMEI
Model Name	JMY9020
Color	Black
Material	Iron, Polycarbonate
Product Dimensions	12.2"L x 12.2"W x 39"H (Adjustable Height)
Light Source Type	LED
Color Temperature	3000K, 4500K, 6000K (Dimmable)
Brightness	1000 Lumens (Maximum)
Control Method	Remote Control, Wall Switch
Installation Type	Suspended (Pendant)
Indoor/Outdoor Usage	Indoor
Item Weight	3.67 pounds (1.67 Kilograms)

10. WARRANTY AND SUPPORT

FIMEI stands behind its products. This pendant light fixture is backed by a 2-year support period. Should you have any questions, concerns, or require assistance, please contact FIMEI customer service. For the most up-to-date contact information, please refer to the product packaging or the official FIMEI website.

