Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

OmniMaster OM01 Max

OmniMaster OM01 Max Phone Vlog Selfie Monitor Screen Instruction Manual

Model: OM01 Max | Brand: OmniMaster

Introduction

The OmniMaster OM01 Max Phone Vlog Selfie Monitor Screen is designed to enhance your mobile content creation by allowing you to utilize your phone's high-quality rear camera for vlogging, selfies, and live streaming. This manual provides detailed instructions for setup, operation, maintenance, and troubleshooting to ensure optimal performance of your device.



Image: The OmniMaster OM01 Max Phone Vlog Selfie Monitor Screen attached to a smartphone, displaying the phone's camera feed.

What's in the Box

Upon opening your OmniMaster OM01 Max package, you should find the following components:

- 1 x Selfie & Vlog Screen
- 1 x Phone Holder
- 1 x Bluetooth Remote Control
- 1 x Type-C Cable
- 1 x Velvet Bag

Setup Guide

1. Physical Assembly

1. **Attach Phone Holder:** Securely attach the phone holder to the OmniMaster monitor. The holder is designed to extend from 3.15 to 4.33 inches to accommodate various smartphone sizes.
2. **Mount Smartphone:** Place your smartphone into the phone holder. Ensure it is firmly gripped.

3. **Optional Tripod/Accessory Attachment:** The phone holder features a 1/4" screw hole, allowing you to mount it onto a tripod or attach other accessories like microphones or LED lights.



Image: The OmniMaster OM01 Max monitor attached to a phone holder, demonstrating its compatibility with tripods and other accessories.

2. Wireless Connection (iPhone & Android)

The OmniMaster OM01 Max supports wireless screen mirroring for both iPhone and Android devices. Follow these steps for a seamless connection:

1. **Power On:** Long press the power button on the OmniMaster monitor for 3 seconds to turn it on. The screen will display connection instructions.
2. **Connect to Wi-Fi:** On your smartphone, go to Wi-Fi settings. Search for the device name corresponding to the PH01 SSID (e.g., "PH01-230917" or similar).
3. **Enter Password:** Enter the provided password (usually "12345678") to connect to the monitor's Wi-Fi network.
4. **Initiate Screen Mirroring:**
    - **For iPhone:** Swipe down from the top-right corner of your screen (or up from the bottom for older models) to open

Control Center. Tap "Screen Mirroring" and select the PH01 device name.

- **For Android (Samsung example):** Swipe down from the top of your screen to access Quick Settings. Tap "Smart View" (or equivalent screen casting feature) and select the PH01 device name.

5. **Confirm Connection:** Your phone's screen should now be mirrored on the OmniMaster monitor.

▶ **Watch video online**
How To Setup Your Phone With the OM-01 Max Monitor

Video: This video demonstrates the wireless setup process for the OmniMaster OM01 Max Phone Monitor, showing how to connect your smartphone via Wi-Fi and initiate screen mirroring.

▶ **Watch video online**
How To Setup Your Phone With the OM-01 Max Monitor

Video: A detailed guide on setting up the OmniMaster OM01 Max Phone Monitor with an iPhone using a wireless connection.

▶ **Watch video online**
How To Setup Your Phone With the OM-01 Max Monitor

Video: Instructions for establishing a wireless connection between a Samsung Android phone and the OmniMaster OM01 Max Phone Monitor.

3. Wired Connection (iPhone ONLY)

For iPhone users, a wired connection is available for minimal lag and optimal performance. This method is recommended for critical recording sessions.

1. **Connect Monitor:** Plug one end of the included short USB-C cable into the Type-C charging port on the OmniMaster monitor.
2. **Connect Phone:** Plug the other end of the USB-C cable into your iPhone's charging port.
3. **Automatic Mirroring:** The monitor should automatically detect the wired connection and begin mirroring your iPhone's screen.

Note: Wired connection is currently supported for iPhone only. Android devices use wireless connection.



Image: The OmniMaster OM01 Max monitor connected to an iPhone via a USB-C cable, illustrating the wired connection for low-latency screen mirroring.

▶ **Watch video online**

How To Setup Your Phone With the OM-01 Max Monitor

Video: This video demonstrates the wired connection process for the OmniMaster OM01 Max Phone Monitor with an iPhone, highlighting the low-latency experience.

Operating Instructions

1. Power On/Off & Screen Rotation

To power on the device, long press the power button. A short press of the power button will rotate the screen 180 degrees, allowing for flexible viewing angles regardless of how the monitor is mounted.

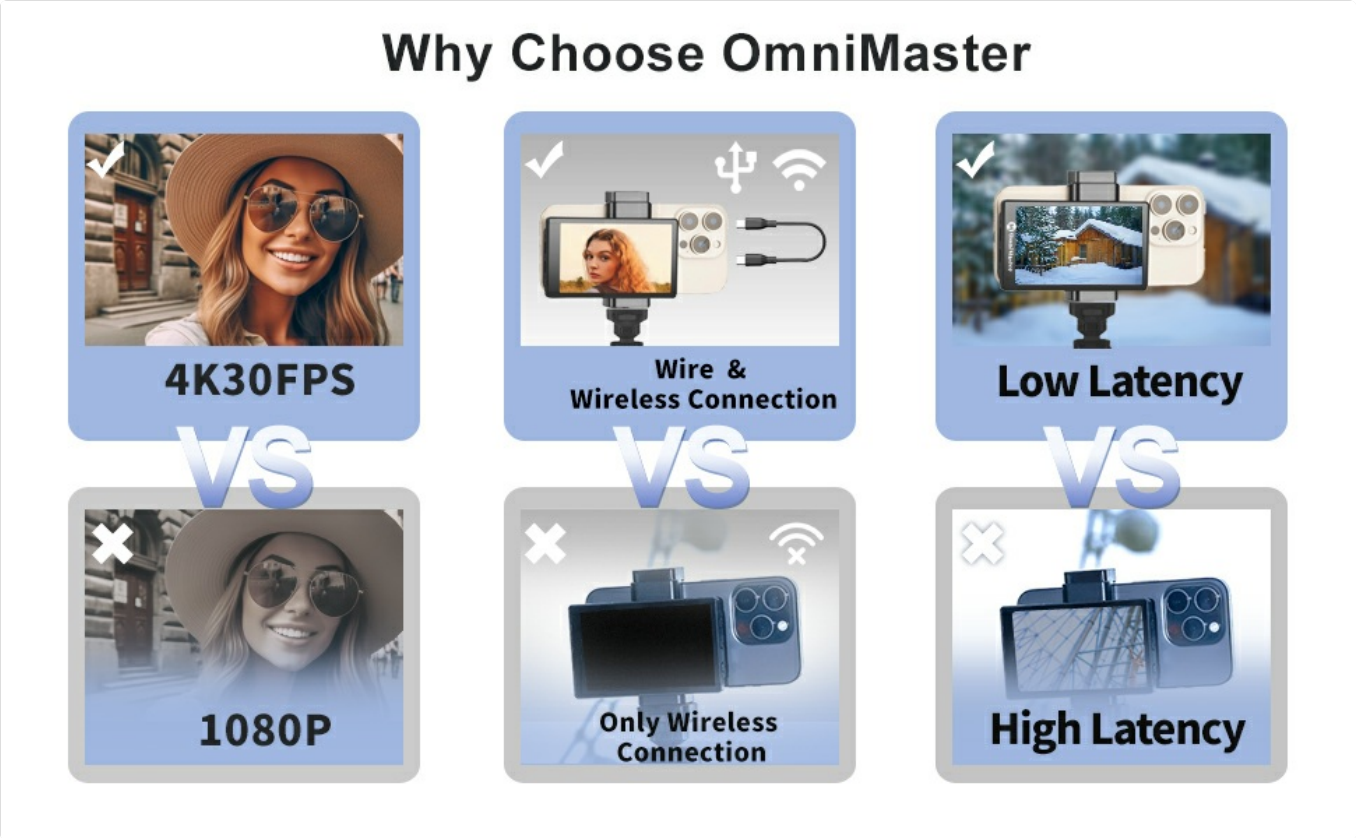

Image: Close-up view of the OmniMaster OM01 Max monitor, highlighting the power button and its function for screen rotation.

2. Brightness Adjustment

The monitor features a brightness adjustment button. Press this button to cycle through 3 different brightness levels to suit your environment.



Image: The OmniMaster OM01 Max monitor demonstrating its 3-level brightness adjustment feature.

3. Screen Mirror Image

To correct upside-down screens, use the Screen Mirror Image Button. A single click will instantly flip the image, optimizing your viewing experience.

4. Bluetooth Remote Control

The included Bluetooth remote control allows you to capture photos or start/stop video recording from up to 33 feet away. Pair it with your smartphone for convenient remote operation.



Image: A hand holding the Bluetooth remote control, with the OmniMaster OM01 Max monitor and a smartphone on a tripod in the background, illustrating remote operation.

5. Charging the Monitor

The OmniMaster monitor uses a Type-C charging port. It can be charged using a 5V/0.5A charger, power bank, laptop, or car charger. A Type-C cable is included in the package.

Important Notes

- **Compatibility:** The monitor does not support iPhone 17 or Google Pixel phones.
- **Connection Method:** While both direct connect (wired) and WLAN (wireless) options are available, direct connect is recommended for the least amount of lag during screen mirroring.

- **Audio Output:** When using screen sharing, audio will be output to the monitor. As the vlog monitor does not have a built-in speaker, you will not hear any audio directly from the monitor during screen sharing.

Maintenance

- **Cleaning:** Use a soft, dry cloth to clean the screen and exterior of the monitor. Avoid using harsh chemicals or abrasive materials.
- **Storage:** When not in use, store the monitor and its accessories in the provided velvet bag to protect them from dust and scratches. Store in a cool, dry place.
- **Battery Care:** To prolong battery life, avoid fully discharging the device frequently. Charge it regularly, even if not in constant use.

Troubleshooting

Problem	Possible Cause	Solution
Monitor does not power on.	Low battery or power button not pressed correctly.	Charge the monitor using the provided Type-C cable. Ensure the power button is long-pressed for 3 seconds.
Screen mirroring not working (wireless).	Incorrect Wi-Fi connection or screen mirroring not initiated.	Verify your phone is connected to the monitor's Wi-Fi (PH01 SSID) and the correct password is entered. Ensure "Screen Mirroring" (iPhone) or "Smart View" (Android) is activated and the monitor is selected.
Screen mirroring not working (wired - iPhone).	Cable not properly connected or incompatible iPhone model.	Ensure the Type-C cable is securely connected to both the monitor and your iPhone. Confirm your iPhone model is supported (not iPhone 17).
No audio during screen mirroring.	Monitor does not have a speaker.	This is normal operation. Audio is output to the monitor but cannot be heard directly from it. Use external audio recording devices if needed.
Image is upside down.	Screen orientation issue.	Press the Screen Mirror Image Button to flip the display.

Specifications

- **Brand:** OmniMaster
- **Model:** OM01 Max
- **Color:** Gray
- **Compatible Devices:** Cellphone (Wireless for iPhone & Android, Wired for iPhone ONLY)
- **Item Weight:** 4.8 Ounces
- **Folded Size:** 6 inches (L) x 3 inches (W) x 3 inches (H)
- **Viewfinder Type:** LCD screen
- **Audio Recording:** No (via monitor)
- **Water Resistance Level:** Not Water Resistant
- **Maximum Weight Recommendation:** 4.96 Ounces
- **Manufacturer:** Dongguan Penghui Industrial Co., Ltd
- **Unit Count:** 1.0 Count

- **ASIN:** B0DG2NJY2T

Warranty Information

The OmniMaster OM01 Max Phone Vlog Selfie Monitor Screen comes with a **2-year manufacturer's warranty**. This warranty covers defects in materials and workmanship under normal use. Please retain your proof of purchase for warranty claims. For detailed terms and conditions, refer to the warranty card included in your package or contact OmniMaster customer support.

Customer Support

Should you encounter any issues or have questions regarding your OmniMaster OM01 Max, please refer to the troubleshooting section of this manual. If the problem persists, or for further assistance, please contact OmniMaster customer support through the retailer's platform or visit the official OmniMaster website for contact details.
For additional resources and product information, you may visit the OmniMaster Store on Amazon.

© 2026 OmniMaster. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0DG2NJY2T

More documents and user manuals: **https://manuals.plus/**