

Laptomo LPT-S6

Laptomo 15.6-inch Triple Portable Monitor Laptop Screen Extender User Manual

Model: LPT-S6

1. INTRODUCTION

Thank you for choosing the Laptomo 15.6-inch Triple Portable Monitor Laptop Screen Extender. This device is designed to enhance your productivity by providing an expanded visual workspace, whether you are at home, in the office, or on the go. This manual will guide you through the setup, operation, and maintenance of your new portable monitor to ensure optimal performance and user experience.

2. PRODUCT OVERVIEW

Key Features

- **Powerful Visual Experience:** 15.6-inch Full HD (1920x1080) display with 300 nits brightness, 1000:1 contrast ratio, and 120% sRGB color richness.
- **Eye Protection:** Low blue light design with anti-glare and anti-flicker functions.
- **Portable and Easy to Use:** Magnetic back panel and carry pouch for easy transport, creating a mobile work environment.
- **Plug and Play:** Simple connection via USB-C or USB-A and HDMI.
- **Flexible Support:** Upgraded stand allows 235° horizontal rotation and 90° vertical rotation.
- **Detachable Design:** Can be detached into two independent 15.6-inch screens.
- **Wide Compatibility:** Compatible with Windows, Mac, Android, Chrome, and Linux operating systems.

Multiple Display Modes



Multiple Display Modes



Mirror Display



Extended Display

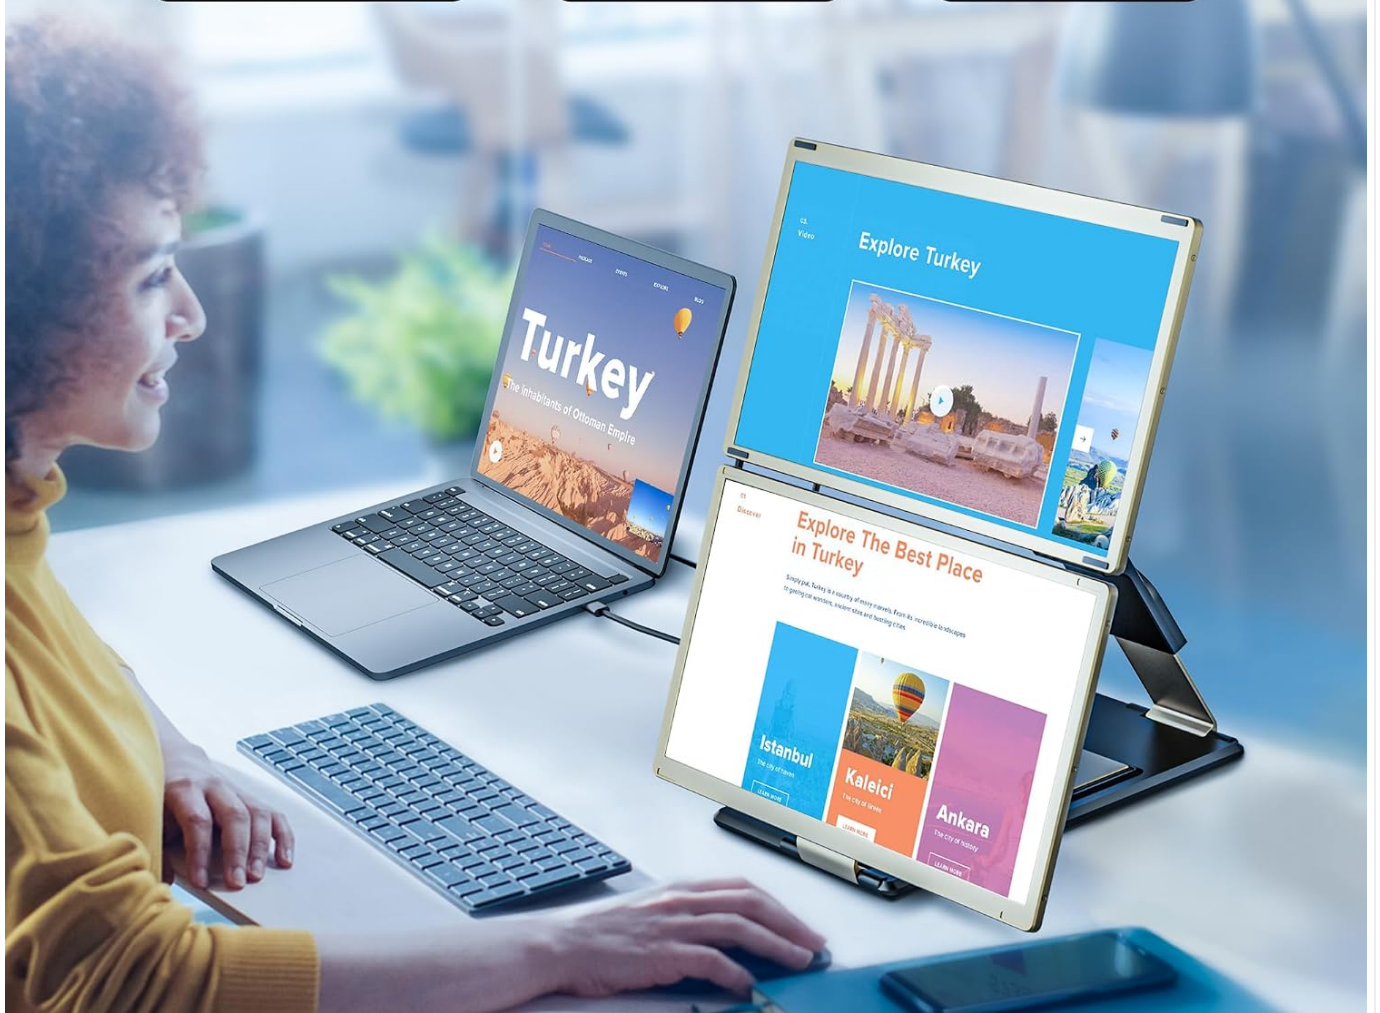


Figure 2.1: The Laptomo 15.6-inch Triple Monitor Laptop Screen Extender, highlighting its Full HD resolution, 235-degree rotation, 80% NTSC color gamut, 300 cd/m² brightness, plug-and-play functionality, and eye care features.

15.6" Triple Monitor Laptop Screen Extender

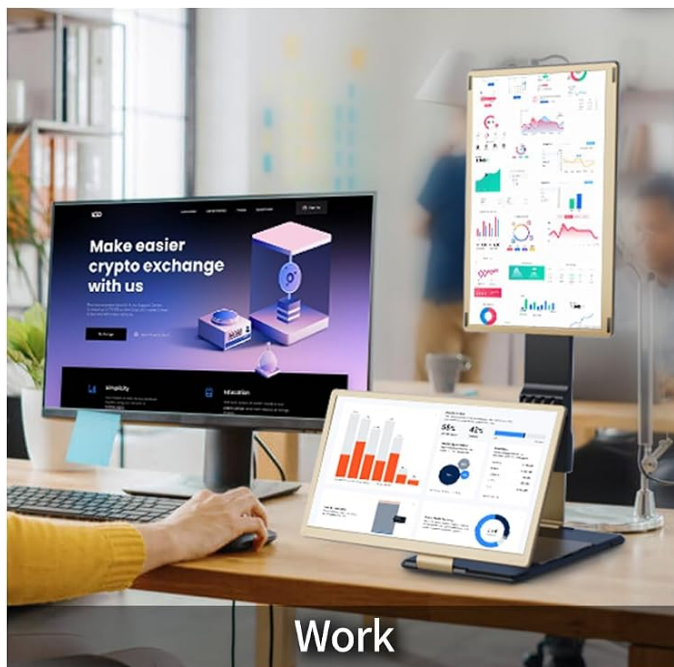


Figure 2.2: Detailed specifications of the 15.6-inch FHD IPS display, including viewing angle, brightness, resolution, aspect ratio, color gamut, and contrast ratio.

3. PACKAGE CONTENTS

Please check the package contents upon unboxing. If any items are missing or damaged, please contact customer support.

- 1x Laptomo Triple Portable Monitor
- 1x User Manual
- 2x USB-C to USB-C Cables
- 2x HDMI to USB-C Cables
- 2x USB-A to USB-C Cables
- 1x Carry Bag




Work



Bussiness Meeting



Gaming

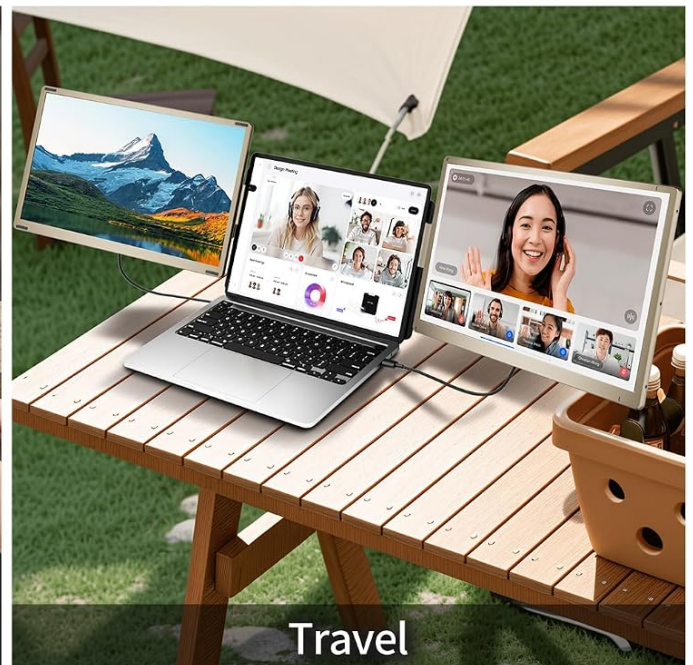

Travel

Figure 3.1: The complete package contents for the Laptomo Triple Portable Monitor, including the monitors, various connection cables, user manual, and a protective carry bag.

4. SETUP INSTRUCTIONS

Attaching the Monitor to Your Laptop

1. Place your laptop on a stable surface.
2. Gently extend the Laptomo monitor's frame to fit the width of your laptop screen (compatible with 13-inch to 17.3-inch laptops).
3. Ensure the kickstand is properly adjusted to provide stable support for both the laptop and the extended screens.

Connecting the Monitor

The Laptomo monitor supports multiple connection methods for video and power. Choose the method that best suits your laptop's ports.

- **USB-C Connection (Full Function):** If your laptop has a full-featured USB-C port (supporting video and power delivery), connect one USB-C to USB-C cable from your laptop to each monitor's USB-C port. This provides both video signal and power.
- **HDMI + USB-A Connection:** If your laptop has an HDMI port and a USB-A port, connect one HDMI to USB-C cable for video and one USB-A to USB-C cable for power to each monitor.
- **Power Requirement:** When using an HDMI connection, ensure a separate USB-A to USB-C cable is connected to the same extended screen for power.
- **Plug & Play:** Once connected, the monitors should be automatically detected by your operating system. You may need to adjust display settings in your OS.



Figure 4.1: This diagram illustrates the flexible attachment mechanism, allowing the screens to stretch and fit laptops from 13 to 17.3 inches, along with the stable kickstand for support and 235-degree rotation.

5. OPERATING INSTRUCTIONS

Display Modes

The Laptomo monitor supports various display modes to suit your workflow:

- **Extended Display:** Each screen displays different content, expanding your workspace.
- **Mirror Display:** All screens display the same content, ideal for presentations.
- **Multiple Display:** A combination of extended and mirror modes, allowing flexible arrangements.

Detachable into Two 15.6-inch Single Screens



Figure 5.1: This image shows the various display modes available: Multiple Display, Mirror Display, and Extended Display, allowing users to customize their workspace for enhanced productivity.


Rotation and Detachable Screens

- **Flexible Rotation:** The upgraded stand allows for a 235° horizontal rotation and a 90° vertical rotation, enabling you to adjust the viewing angle as needed.
- **Detachable Design:** The screens can be easily detached from the main unit, allowing them to be used as two independent 15.6-inch portable monitors. Each screen can be supported by its own sleeve stand or single screen stand.


235° Rotation & Stable Kickstand



Stretch to sides to fit for 13"-17.3" laptops

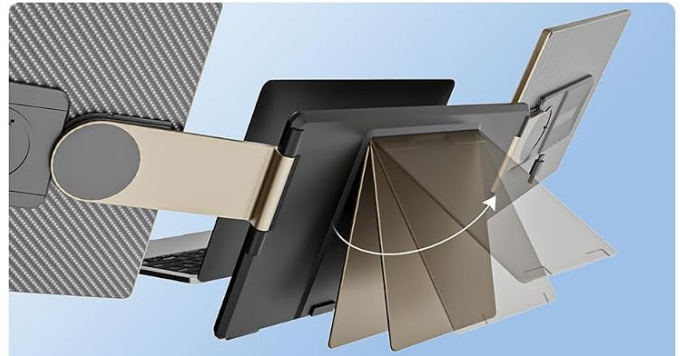

Adjust the kickstand angle to ensure the stability of the laptop

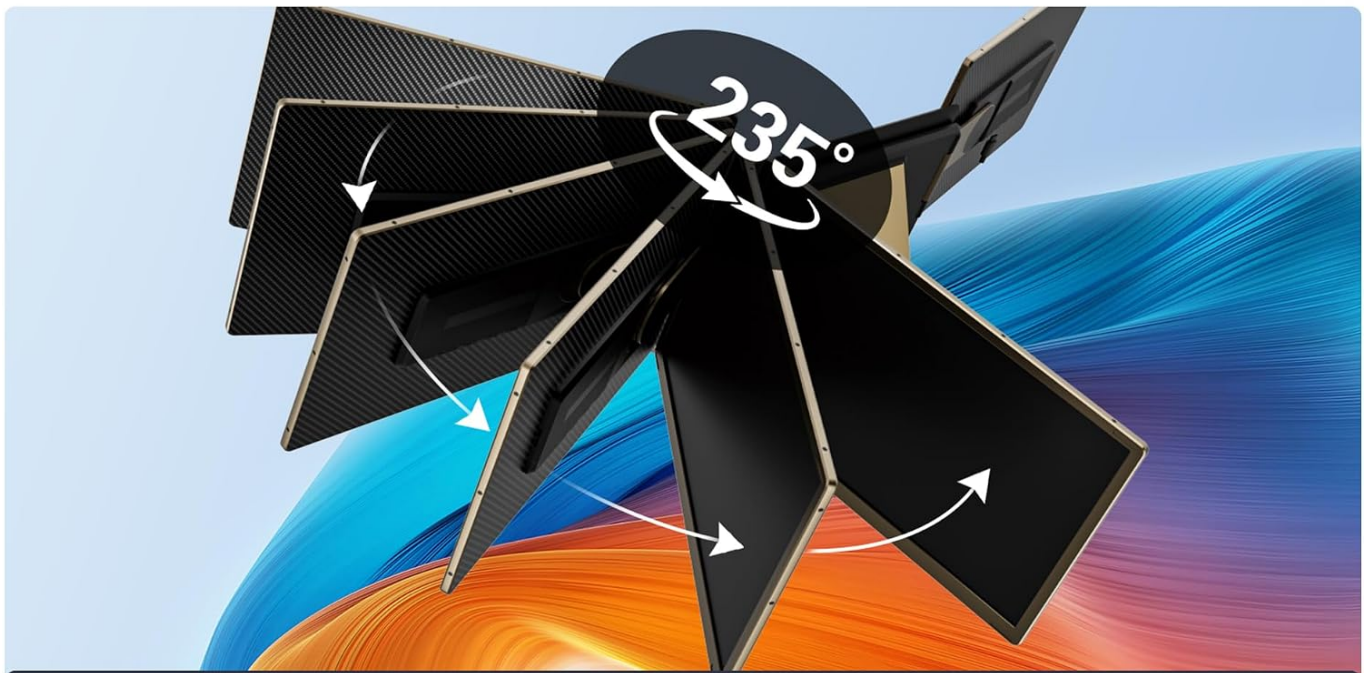

235° rotation to adjust viewing angle

Figure 5.2: The monitor can be detached into two independent 15.6-inch single screens, each usable with its own sleeve stand or single screen stand for versatile setups.

Usage Scenarios

The Laptomo Triple Portable Monitor is versatile for various applications:

- **Work:** Enhance multitasking for coding, data analysis, or document editing.
- **Business Meetings:** Share content easily in mirror mode or use extended display for notes.
- **Gaming:** Enjoy an immersive gaming experience with expanded visuals.
- **Travel:** Maintain productivity on the go with a portable multi-screen setup.



Our		Other	
Screen Size	15.6 INCH		14 INCH
Other Functions	Detachable Deformable		X
Aspect Ratio	16:9		16:7
Viewing Angle Adjustment	235°		178°
Speaker	2		1
Resolution	1920x1080 P		1920x960 P

Figure 5.3: This collage illustrates diverse applications of the portable monitor, including professional work, collaborative business meetings, immersive gaming, and productive travel setups.

6. COMPATIBILITY

The Laptomo Triple Portable Monitor is compatible with a wide range of devices and operating systems:

- Windows Laptops
- Mac Computers (with supported chips)
- Android Devices
- Chrome OS Systems
- Linux Systems
- Dex Devices
- Nintendo Switch

Important Note for Mac Users:

- Mac computers with **M1/M2/M3/M4 PRO/MAX** chips can use the screen extender directly.
- Mac computers with standard **M1/M2/M3/M4** chips (non-Pro/Max) require additional H5-T cables for full functionality.



Figure 6.1: This chart details Mac compatibility, indicating that M1/M2/M3/M4 PRO/MAX chips are directly supported, while standard M1/M2/M3/M4 chips require additional H5-T cables.

7. MAINTENANCE

To ensure the longevity and optimal performance of your Laptomo Triple Portable Monitor, follow these maintenance guidelines:

- **Cleaning the Screens:** Use a soft, lint-free cloth specifically designed for electronics. Dampen the cloth slightly with water or a screen-cleaning solution. Avoid harsh chemicals, abrasive cleaners, or direct spraying onto the screen.
- **Cleaning the Body:** Wipe the exterior surfaces with a soft, dry cloth.
- **Storage:** When not in use, store the monitor in its provided carry bag to protect it from dust, scratches, and impacts.
- **Avoid Extreme Conditions:** Do not expose the monitor to extreme temperatures, direct sunlight for prolonged periods, or high humidity.
- **Handle with Care:** Avoid dropping the device or applying excessive force to the screens or hinges.

8. TROUBLESHOOTING

If you encounter any issues with your Laptomo Triple Portable Monitor, please refer to the following table for common problems and solutions.

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
No display / Black screen	Loose cable connection, insufficient power, incorrect input source, incompatible device.	1. Ensure all cables (USB-C, HDMI, power) are securely connected. 2. Verify that the monitor is receiving sufficient power, especially if using HDMI (requires separate USB-A to USB-C for power). 3. Check your laptop's display settings to ensure the external monitors are detected and set to 'Extend' or 'Duplicate'. 4. Confirm your laptop's ports support video output (e.g., full-featured USB-C).
Screen flickering or power cycling	Unstable power supply, faulty cable, driver issue.	1. Ensure stable power supply. Try a different USB port or power adapter if available. 2. Replace the connection cables with new ones to rule out cable defects. 3. Update your laptop's graphics drivers to the latest version.
Incorrect resolution or display settings	Operating system display settings.	1. Access your operating system's display settings (e.g., Windows Display Settings, macOS System Settings > Displays). 2. Adjust the resolution to 1920x1080 and arrange the displays as desired (extended, mirrored).
Mac M1/M2/M3/M4 (non-Pro/Max) not working	Requires specific cables.	Ensure you are using the required H5-T cables for these specific Mac chip models. Refer to the compatibility section.

9. TECHNICAL SPECIFICATIONS

Feature	Specification
Brand	Laptomo
Model Number	LPT-S6
Screen Size	15.6 Inches
Resolution	FHD 1080p (1920 x 1080)
Aspect Ratio	16:9
Screen Surface	Glossy
Contrast Ratio	1000:1
Response Time	1 Millisecond
Refresh Rate	60 Hz

Feature	Specification
Viewing Angle	235 Degrees
Brightness	300 nits
Item Dimensions (L x W x H)	38 x 28 x 2 Centimeters
Item Weight	4.12 Kilograms
Connectivity Technology	HDMI, USB Type C
Compatible Devices	Windows laptops, Mac computers (supported chips), Android devices, Chrome systems, Linux systems, Dex devices, Nintendo Switch
Special Features	Portable, flexible stand, plug and play, blue light filter, wide compatibility, divisible screen

10. WARRANTY AND SUPPORT

Warranty Information

The Laptomo Triple Portable Monitor comes with a **1-year limited warranty** from the date of purchase. This warranty covers manufacturing defects and workmanship under normal use. It does not cover damage caused by misuse, accidents, unauthorized modifications, or external causes.

Customer Support

If you have any questions, require technical assistance, or need to claim warranty service, please do not hesitate to contact our customer support team. We are committed to providing a response within 24 hours. Please refer to the contact information provided with your purchase or visit the official Laptomo website for support details.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question