

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [Monster](#) /
- › [Monster Persona SE ANC Headphones User Manual](#)

## Monster Monster Persona SE ANC

# Monster Persona SE ANC Headphones User Manual

Model: Monster Persona SE ANC

## INTRODUCTION

---

The Monster Persona SE ANC Active Noise Cancelling Headphones are designed to provide a superior audio experience with advanced noise cancellation, long battery life, and comfortable wear. This manual provides essential information for setting up, operating, and maintaining your headphones.



Image: Monster Persona SE ANC Headphones, showcasing their sleek black design with subtle gold accents on the headband and earcups.

## WHAT'S IN THE BOX

Verify that all items are present in the package:

- Monster Persona SE ANC Headphones x 1
- Type-C Charging Cable x 1
- User Manual x 1



Image: The complete package contents, showing the Monster Persona SE ANC headphones, a USB-C charging cable, and the user manual.

## PRODUCT OVERVIEW AND CONTROLS

Familiarize yourself with the headphone's buttons and ports for optimal use.

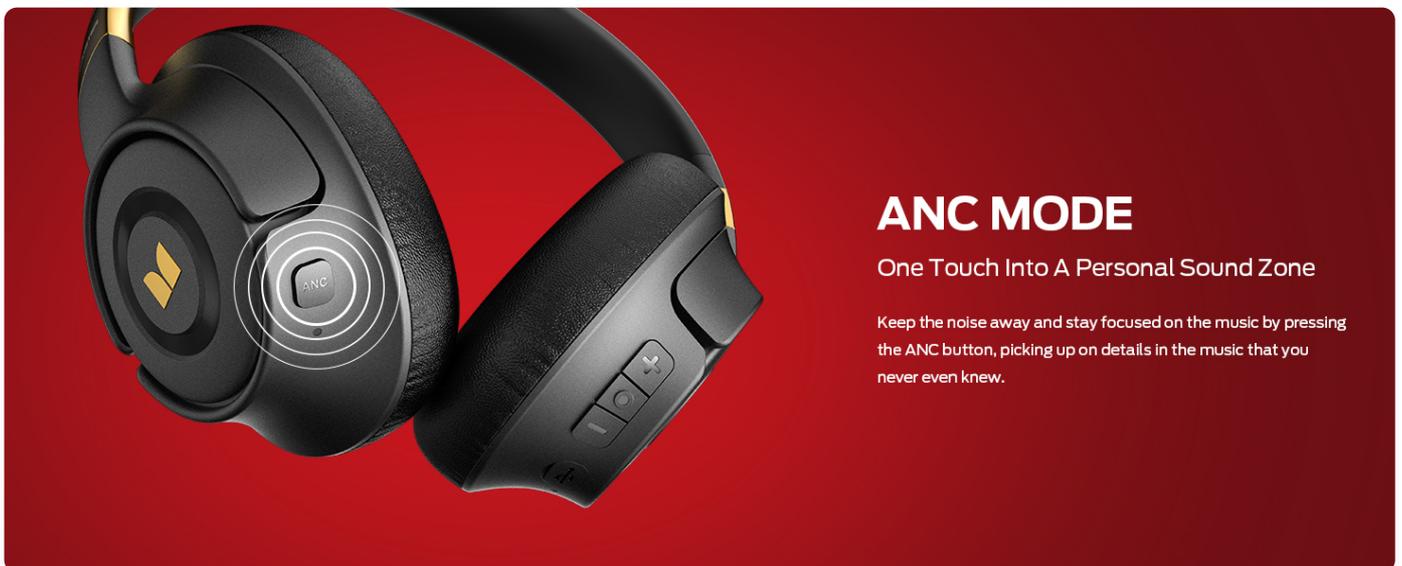


Image: A detailed diagram illustrating the location and function of each control button on the Monster Persona SE ANC headphones, including ANC, volume up/down, power, and multi-function buttons.

### Control Functions:

- **ANC Button:** Press once to toggle Active Noise Cancellation On/Off.
- **Volume + Button:** Press once for Volume Up. Press and hold for 2 seconds for Previous Song.
- **Volume - Button:** Press once for Volume Down. Press and hold for 2 seconds for Next Song.
- **Multi-function Button (Power/Call):**

- Press and hold for 3 seconds to Power On.
- Press and hold for 5 seconds to Power Off.
- Press once to Answer/Hang Up a call.
- Press and hold for 2 seconds to Reject a call.
- Press twice to activate Voice Assistant.

## SETUP

---

### **Charging the Headphones:**

Before first use, fully charge your Monster Persona SE ANC headphones. A full charge takes approximately 2 hours.

1. Connect the provided Type-C charging cable to the charging port on the headphones.
2. Connect the other end of the cable to a USB power source (e.g., computer USB port, wall adapter).
3. The indicator light will show charging status and turn off or change color when fully charged.

A 5-minute quick charge provides approximately 4 hours of listening time.

### **Bluetooth Pairing:**

The Monster Persona SE ANC headphones utilize advanced Bluetooth 5.4 technology for stable and efficient wireless connection.

# UPGRADED BLUETOOTH 5.4



Image: A visual emphasizing the upgraded Bluetooth 5.4 technology, indicating stable transmission speed and lower latency for the headphones.

Follow these steps to pair your headphones with a Bluetooth-enabled device:

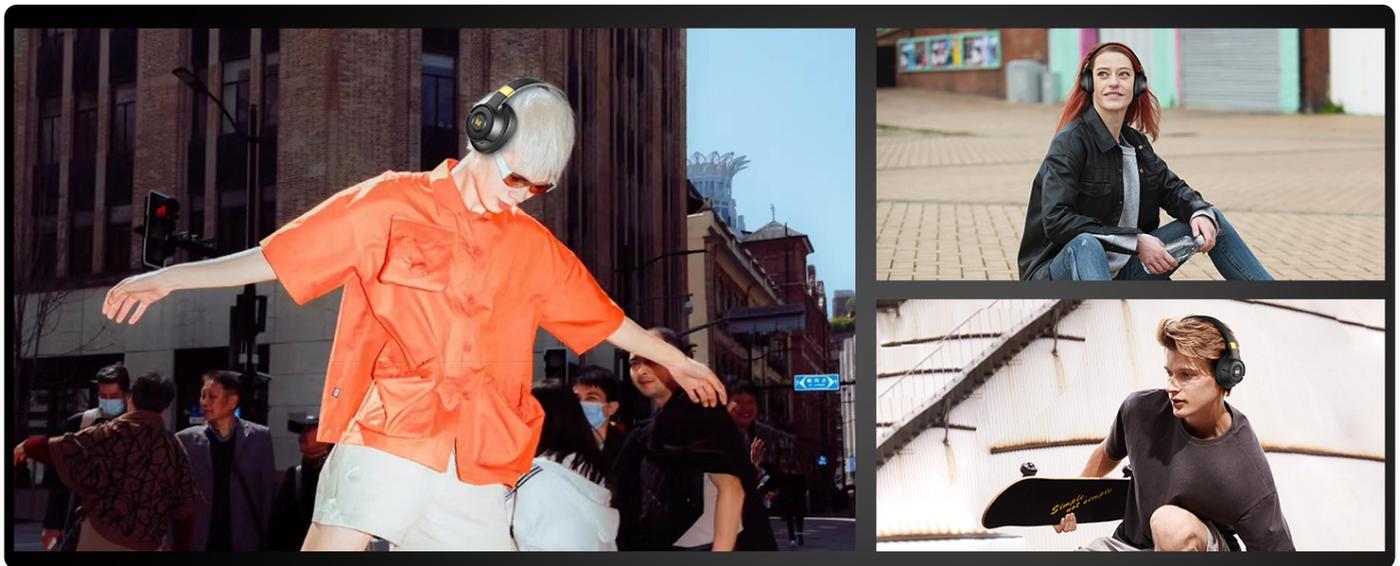


Image: Visual guide demonstrating the three simple steps to pair the headphones: power on, enable Bluetooth on device, and select "Monster Persona SE ANC" from the device list.

1. **Step 1:** Turn on the headphones by pressing and holding the Power button for 3 seconds. The white light will flash slowly, indicating pairing mode.
2. **Step 2:** On your device (smartphone, tablet, computer), enable Bluetooth and search for available devices. Select "Monster Persona SE ANC" from the list.
3. **Step 3:** Once connected, you will hear a system voice prompt "Connected". The headphones are now ready for use.

The headphones will automatically connect to the last paired device upon power-on if Bluetooth is enabled on the device.

## OPERATING INSTRUCTIONS

---

### Active Noise Cancellation (ANC):

The Monster Persona SE ANC headphones feature advanced digital noise cancellation to reduce ambient noise.

# ACTIVE NOISE CANCELLATION



Image: A visual representation of Active Noise Cancellation, showing how external noise is detected and then eliminated by the ANC technology, resulting in a quieter listening experience.

- Press the dedicated ANC button on the earcup once to activate Active Noise Cancellation.
- Press the ANC button again to deactivate ANC.
- ANC can block up to 98% of ambient noise, allowing for focused listening.

## Audio Playback:

Enjoy high-fidelity stereo audio with deep bass, powered by Pure Monster Sound technology.

**MONSTER®**



**PURE MONSTER SOUND**

Image: A person wearing the Monster Persona SE ANC headphones, with sound waves emanating from the earcups, symbolizing the immersive Pure Monster Sound experience.

- Use the Volume + and Volume - buttons to adjust playback volume.
- Press and hold Volume + for Previous Song.
- Press and hold Volume - for Next Song.

#### **Call Management:**

- Press the Multi-function button once to Answer or Hang Up a call.
- Press and hold the Multi-function button for 2 seconds to Reject an incoming call.

#### **Battery Life:**

The headphones offer extended playtime for long listening sessions.

# LISTEN LONGER



# 60H

Charge **2H**    Playtime **60H**    Standby **800H**

Image: A visual representation highlighting the impressive 60-hour playtime of the Monster Persona SE ANC headphones, with indicators for 2 hours charge time and 800 hours standby time.

- Up to 40 hours of music playback with Active Noise Cancellation enabled.
- Up to 60 hours of music playback in standard mode (ANC off).
- Standby time is approximately 800 hours.

## MAINTENANCE AND CARE

Proper care ensures the longevity and performance of your headphones.

- **Cleaning:** Use a soft, dry cloth to clean the earcups and headband. Do not use abrasive cleaners or solvents.
- **Storage:** When not in use, store the headphones in a cool, dry place. The foldable design allows for convenient storage and portability.



## What's in The Box?

Monster Persona SE ANC Headphones × 1  
 Type C- Charging Cable × 1  
 User Manual × 1

Image: A three-step visual guide demonstrating how to rotate the earcups, fold the headphones, and store them compactly in a case for convenient portability.

- **Avoid Moisture:** These headphones are not water-resistant. Avoid exposure to water, rain, or excessive humidity.
- **Temperature:** Do not expose the headphones to extreme temperatures (hot or cold).

## TROUBLESHOOTING

If you encounter issues, try these common solutions:

| Problem                      | Possible Solution  |
|------------------------------|--|
| Headphones won't turn on.    | Ensure the headphones are fully charged. Connect to a power source and try again.  |
| Cannot pair with device.     | <ul style="list-style-type: none"> <li>◦ Ensure headphones are in pairing mode (white light flashing slowly).</li> <li>◦ Turn off and on Bluetooth on your device.</li> <li>◦ Forget "Monster Persona SE ANC" from your device's Bluetooth list and try pairing again.</li> <li>◦ Ensure headphones are within Bluetooth range (10 meters).</li> </ul> |
| No sound or low volume.      | <ul style="list-style-type: none"> <li>◦ Check volume levels on both headphones and your connected device.</li> <li>◦ Ensure headphones are properly connected to your device.</li> <li>◦ Try playing different audio sources.</li> </ul>  |
| ANC not working effectively. | <ul style="list-style-type: none"> <li>◦ Ensure the ANC button is pressed to activate the feature.</li> <li>◦ Adjust headphone fit to ensure a good seal around your ears.</li> <li>◦ ANC is most effective against low-frequency, constant noise.</li> </ul>  |

## SPECIFICATIONS

Key technical specifications for the Monster Persona SE ANC Headphones:

| Feature                 | Detail  |
|-------------------------|---|
| Model Name              | Monster Persona SE ANC                              |
| Connectivity Technology | Wireless (Bluetooth 5.4)                            |
| Noise Control           | Active Noise Cancellation                           |
| Ear Placement           | Over Ear  |
| Material                | Leather (earcups)                                   |
| Battery Life (ANC off)  | Up to 60 Hours                                      |
| Battery Life (ANC on)   | Up to 40 Hours                                      |
| Charging Time           | Approx. 2 Hours (5 min charge for 4 hours playtime) |
| Frequency Range         | 20 Hz - 20,000 Hz                                   |
| Control Type            | Button Control                                      |
| Water Resistance Level  | Not Water Resistant                                 |
| Weight                  | Approx. 0.6 oz (Lightweight)                        |
| Dimensions (Parcel)     | 20 x 15.1 x 9.2 cm                                  |

## WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the official Monster website or contact their customer service directly. Keep your purchase receipt as proof of purchase for any warranty claims.

**Manufacturer:** Monster

**Model:** Monster Persona SE ANC

**ASIN:** B0DHR9YBXT

© 2024 Monster. All rights reserved.

This manual is for informational purposes only. Specifications are subject to change without notice.