

## ARENTI D3 Set

# ARENTI Baby Monitor D3 Set (2 Cameras, 1 Display) User Manual

Model: D3 Set

## 1. INTRODUCTION

---

This manual provides detailed instructions for the setup, operation, and maintenance of your ARENTI D3 Set Baby Monitor. This system includes two 2K/3MP cameras and a 5-inch wireless display, designed to provide comprehensive monitoring of your child. Please read this manual thoroughly before use to ensure proper functionality and safety.



Image: The ARENTI D3 Set Baby Monitor, showing two cameras, the 5-inch wireless display, and a smartphone screen with the monitoring application.

## 2. PACKAGE CONTENTS

Verify that all items are present in your package:

- 1 x 5-inch Wireless Display Monitor
- 2 x 2K/3MP Baby Cameras
- 3 x Power Adapters (for monitor and cameras)
- 1 x User Manual

## 3. PRODUCT OVERVIEW

---

### 3.1. Wireless Display Monitor

The 5-inch wireless display serves as your primary viewing interface. It features navigation buttons, a microphone, a speaker for two-way audio, and an antenna for stable connection to the cameras.

### 3.2. Baby Cameras

Each camera is equipped with a 2K/3MP lens, infrared LEDs for night vision, a microphone, a speaker, and sensors for temperature and humidity detection. The cameras connect wirelessly to the monitor and can also be accessed via the smartphone application.

## 4. SETUP

---

### 4.1. Charging the Monitor

Before first use, fully charge the 5-inch wireless display monitor using the provided power adapter. Connect the adapter to the monitor's charging port and a power outlet. The charging indicator will show its status.

### 4.2. Powering the Cameras

Connect each camera to a power outlet using its respective power adapter. Ensure the cameras are placed within range of the monitor and a stable Wi-Fi signal if you plan to use the smartphone app.

### 4.3. Initial Pairing

The cameras and monitor are typically pre-paired at the factory. If the monitor does not display video from a camera, refer to the 'Troubleshooting' section for re-pairing instructions.

### 4.4. Smartphone App Installation and Wi-Fi Connection

1. Download the 'ARENTI' application from your device's app store.
2. Create an account or log in.
3. Follow the in-app instructions to add your cameras. Ensure your Wi-Fi network is 2.4GHz for compatibility.

## At Home

Viewing via the screen  
Wi-Fi or APP not required



720p(max) on display

## On-The-Go

Viewing via the APP  
on your smartphone/web



3MP(max) on App

Image: Illustrates the flexibility of viewing, either directly on the monitor at home or remotely via the smartphone application.

### 4.5. Camera Placement

Position the cameras in locations that provide a clear and unobstructed view of the monitoring area. Ensure they are out of reach of children and securely mounted if necessary.

## 5. OPERATING INSTRUCTIONS

### 5.1. Monitor Functions

- **Navigation:** Use the directional buttons and 'OK' button to navigate menus and confirm selections.
- **Camera Switching:** Easily switch between the two connected cameras to view different areas.
- **Zoom:** Utilize the zoom function to get a closer look at the monitored area.
- **Two-Way Audio:** Press and hold the microphone button to speak through the camera's speaker.
- **VOX Mode:** Voice Operated eXchange mode activates the screen and alerts you when sound is detected.
- **Temperature & Humidity:** View real-time temperature and humidity readings from the camera's sensors on the monitor.
- **Lullabies & White Noise:** Select and play soothing sounds directly from the monitor.
- **Feeding Reminders:** Set timed reminders for feeding schedules.

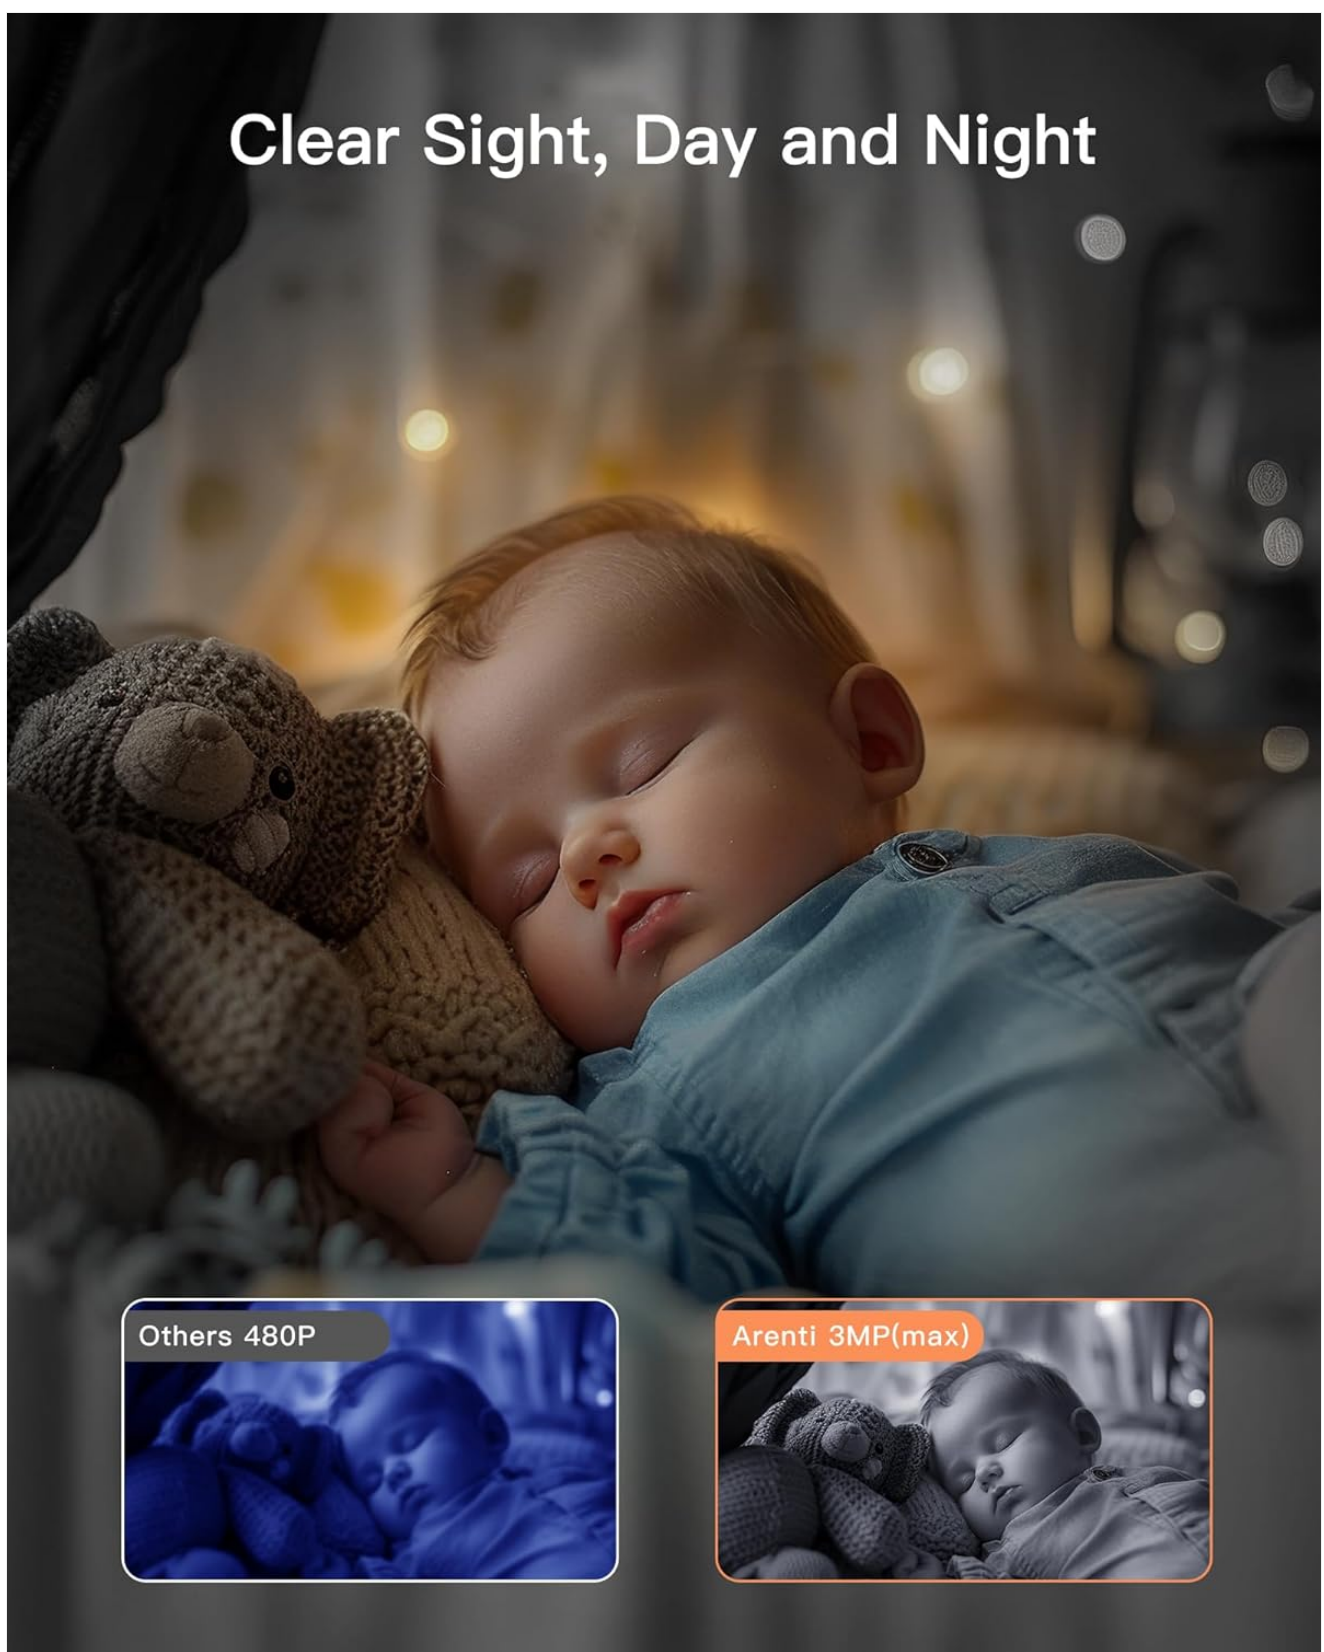


Image: The ARENTI monitor screen showing various menu options and multi-function buttons for control.

## 5.2. Camera Features

- **2K/3MP Video:** Enjoy clear and detailed video footage.
- **Super Night Vision:** Infrared LEDs provide clear black-and-white video in low-light conditions.
- **Crying Detection:** The camera can detect crying sounds and send alerts.
- **Auto Tracking:** The camera can automatically follow detected motion within its field of view.
- **Danger Zone Alerts:** Configure specific areas for enhanced monitoring and alerts.

# Clear Sight, Day and Night



Others 480P



Arenti 3MP(max)



Image: A visual comparison demonstrating the clarity of Arenti's 3MP night vision compared to standard 480P resolution.

# Smart Detection & Instant Alert



Image: The monitor screen highlighting smart detection capabilities and instant alert notifications.

## 5.3. Smartphone App Functions

The ARENTI app provides remote access and control:

- **Remote Viewing:** Monitor your child from anywhere with an internet connection.
- **Settings Adjustment:** Customize camera and alert settings.
- **Alerts:** Receive notifications for crying, motion, or danger zone detections.
- **Recorded Footage:** Access and review video recordings.

## 5.4. Privacy and Security

The system incorporates security measures to protect your data:

- **AES128 Encryption:** Data is secured with advanced encryption.
- **Bank-Level Security:** Ensures secure data transmission and account protection.
- **Wi-Fi Switch Control:** The monitor allows you to enable or disable Wi-Fi connectivity for the cameras, providing an additional layer of privacy.
- **Access Logs:** Review records of who has accessed the camera feed.

### Quad Security Protection

- High-security Crypto Chip
- WiFi switch control
- End to end encryption technology
- Access logs

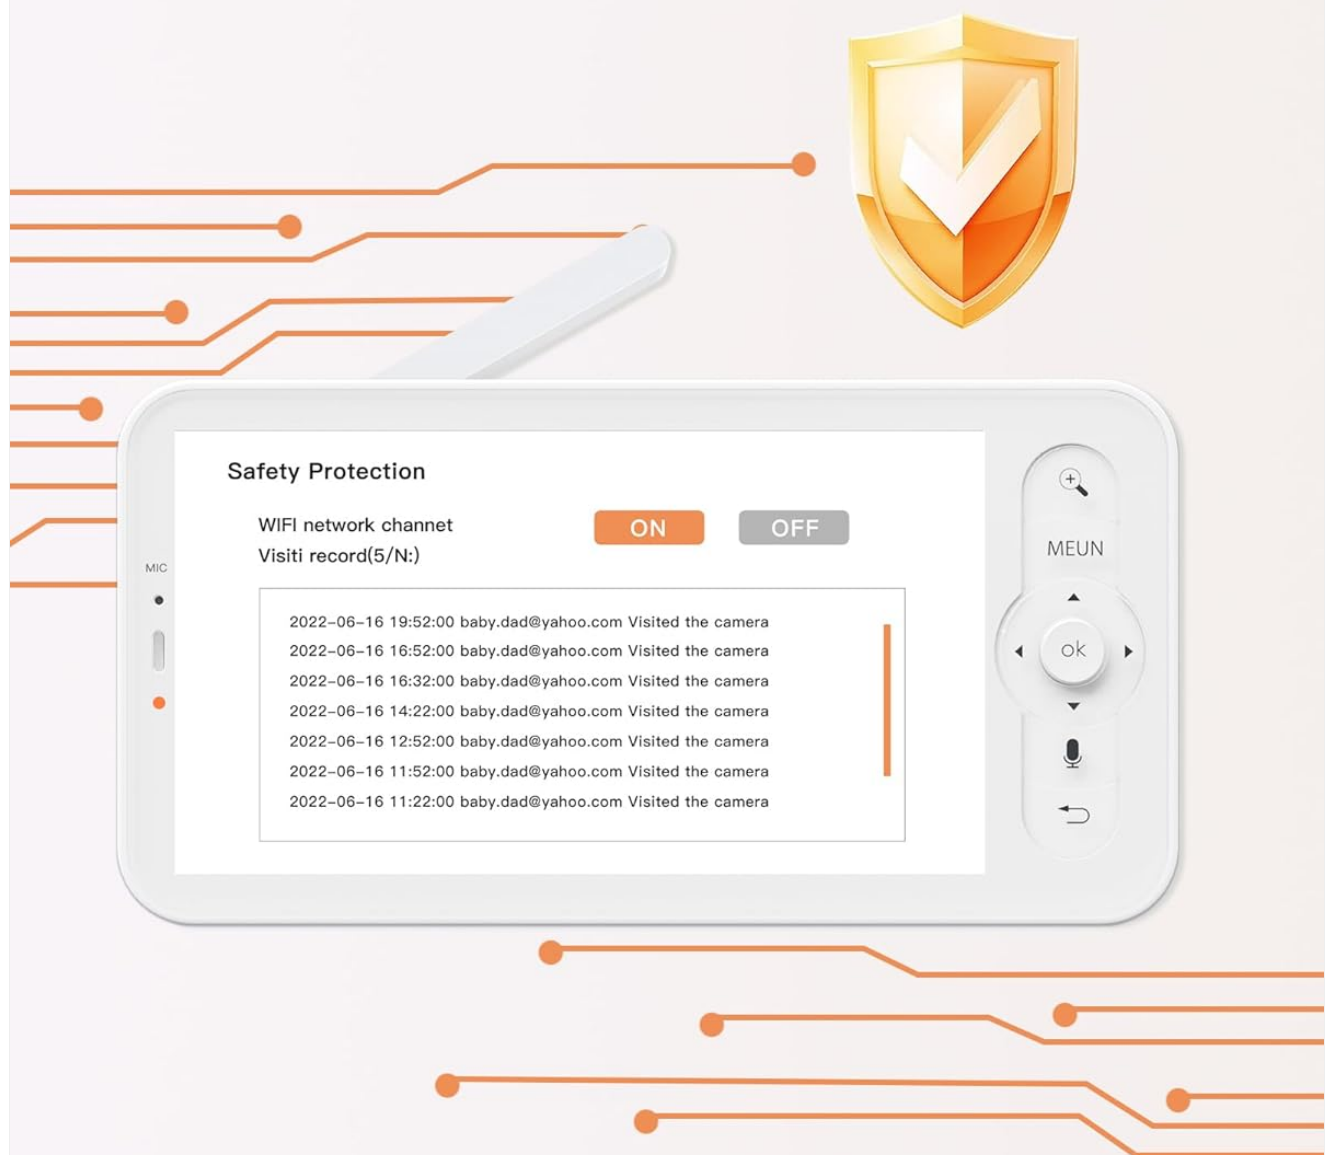


Image: The monitor screen showing security settings, including Wi-Fi switch control and a list of access logs for enhanced privacy.

5.5. Recording and Storage

- **SD Card Storage:** Supports FAT32 format SD cards up to 256GB for local video recording.
- **Cloud Storage:** Optional cloud service is available for storing and accessing video recordings remotely (subscription may apply).



Image: Depicts family members viewing and sharing captured moments, highlighting the options for local SD card storage and cloud service.

6. TROUBLESHOOTING

This section addresses common issues you might encounter:

Problem	Possible Cause	Solution
No image/signal on monitor	Camera not powered, out of range, or unpaired.	Ensure cameras are powered. Move camera closer to monitor. Repair camera if necessary (refer to specific pairing instructions in full manual).
Poor image quality	Low light, camera lens dirty, or poor signal.	Ensure adequate lighting. Clean camera lens. Adjust camera position for better signal.
No sound/poor audio	Volume too low, microphone/speaker obstructed.	Increase monitor volume. Ensure nothing is blocking the camera's microphone or speaker.
Wi-Fi connection issues	Incorrect Wi-Fi password, 5GHz network, or weak signal.	Verify Wi-Fi password. Ensure you are connecting to a 2.4GHz network. Move camera closer to router.
Monitor battery drains quickly	Continuous screen-on time, high brightness.	Reduce screen brightness. Utilize VOX mode to conserve battery.

7. SPECIFICATIONS

- **Maximum Webcam Image Resolution:** 3 MP
- **Connectivity Technology:** Wireless, Wi-Fi (2.4GHz)

- **Power Source:** Battery Powered (Monitor), AC (Cameras)
- **Compatible Devices:** Google Assistant, Amazon Alexa
- **Indoor/Outdoor Usage:** Indoor
- **Item Weight (Set):** 2.48 pounds
- **Package Dimensions:** 9.53 x 7.87 x 3.98 inches
- **Monitor Screen Size:** 5-inch
- **Storage:** Supports FAT32 SD card (Max. 256G), Cloud Storage (optional)

## 8. MAINTENANCE

To ensure the longevity and optimal performance of your ARENTI Baby Monitor:



- **Cleaning:** Use a soft, dry cloth to clean the monitor screen and camera lenses. Avoid abrasive cleaners or solvents.
- **Storage:** Store the device in a cool, dry place when not in use.
- **Power:** Always use the original power adapters provided with the product.






## 9. WARRANTY AND SUPPORT

Your ARENTI Baby Monitor D3 Set comes with a manufacturer's warranty. For detailed warranty information, please refer to the warranty card included in your package or visit the official ARENTI website. For technical support, troubleshooting assistance, or any inquiries, please contact ARENTI customer service through their official channels. You can often find support contact information on the brand's website or within the ARENTI smartphone application.

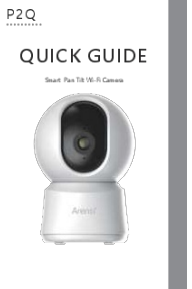*No official product videos were embedded as no video URLs with 'creator\_type': 'Seller' were provided in the product data.*

### Related Documents - D3 Set

	<p><a href="#">Arenti P2Q Smart Pan Tilt Wi-Fi Camera Quick Guide</a></p> <p>A quick start guide for the Arenti P2Q Smart Pan Tilt Wi-Fi Camera, covering packing list, product description, installation, configuration, specifications, and legal notices.</p>
	<p><a href="#">Arenti Alnanny B2 Kit Smart Baby Monitor User Manual</a></p> <p>Comprehensive user manual for the Arenti Alnanny B2 Kit smart baby monitor, detailing setup, features, and troubleshooting.</p>

<div><div>DOME 1Arenti®</div><div>QUICK GUIDE</div><div><div>DS Smart Indoor Pan Tilt IR Camera</div><div>DE Intelligent Pan Tilt WDR Illumination</div><div>DF Camera IR Pan Tilt WDR Illumination</div><div>DL Smart Home Protection with camera</div><div>DT Telescopic IR PT Smart Pan Tilt per vision</div><div>BS Camera intelligent IR PT Pan Tilt per vision</div><div>PT Camera IR intelligent Pan Tilt</div><div>RT Camera intelligent IR PT Pan Tilt</div><div>TT Auto Night Pan Tilt IR Camera</div></div><div></div><div>Compatible with Amazon Alexa &amp; Google Assistant</div></div>	<p><a href="#">Arenti DOME 1 Smart Indoor Camera: Quick Guide &amp; Features</a></p> <p>Comprehensive quick guide for the Arenti DOME 1 smart indoor security camera. Learn about its 2K/3MP Ultra HD video, pan/tilt control, AI detection, two-way audio, and compatibility with Amazon Alexa and Google Assistant.</p>
<div><div>F1Loxihub</div><div>QUICK GUIDE</div><div><div>DS Smart Wi-Fi Floodlight Camera</div><div>DF Floodlight intelligent Wi-Fi intelligent</div><div>DL Smart Wi-Fi Floodlight camera</div><div>DT Intelligent Wi-Fi Floodlight camera</div><div>RT Telescopic smart Wi-Fi Floodlight</div><div>BS Camera intelligent with IR intelligent</div><div>PT Camera intelligent with IR Floodlight</div><div>RT Camera IR intelligent with camera</div><div>TT Auto Wi-Fi intelligent camera</div></div><div></div><div>Compatible with Amazon Alexa &amp; Google Assistant</div></div>	<p><a href="#">Arenti F1 Smart Wi-Fi Floodlight Camera Quick Guide</a></p> <p>A concise guide to installing and using the Arenti F1 Smart Wi-Fi Floodlight Camera, covering setup, features, and troubleshooting.</p>
<div><div>Baby9T&amp;2M</div><div>QUICK GUIDE</div><div></div><div></div></div>	<p><a href="#">Arenti Baby 9T &amp; 2M Baby Monitor Quick Guide</a></p> <p>Concise guide to setting up and using the Arenti Baby 9T and Baby 2M baby monitor, covering installation, app pairing, features, and troubleshooting.</p>
<div><div>AINANNYArenti®</div><div>with Monitor</div><div>USER MANUAL</div><div><div>DS Smart baby monitor</div><div>DF Babyphone intelligent</div><div>DT High-definition intelligent</div><div>DL Intelligent Babyphone</div><div>DT Baby monitor intelligent</div></div><div></div><div>Compatible with Amazon Alexa &amp; Google Assistant</div></div>	<p><a href="#">Arenti AINANNY Smart Baby Monitor User Manual</a></p> <p>User manual for the Arenti AINANNY smart baby monitor, covering setup, features, usage, and troubleshooting. Compatible with Amazon Alexa and Google Assistant.</p>