

[Manuals.plus](#) /

› [Bewinner](#) /

› Bewinner 15.6inch Portable Monitor User Manual

Bewinner Bewinner01cdwambk7

Bewinner 15.6-inch Portable Monitor User Manual

Model: Bewinner01cdwambk7

1. PRODUCT OVERVIEW

The Bewinner 15.6-inch Portable Monitor is a versatile external display designed for enhanced productivity and entertainment. It features a Full HD 1920x1080 resolution IPS screen with a 178-degree viewing angle, delivering clear and colorful visuals. With a 60Hz refresh rate and 45% NTSC color gamut, it provides a vibrant viewing experience.

This monitor is equipped with built-in stereo chamber speakers for immersive 3D stereo sound. Its plug-and-play design allows for easy connectivity via a single USB-C cable for both video signal and power (for compatible devices). It also supports Mini HD multimedia interface connections, ensuring wide compatibility with various devices including PCs, OS X devices, mobile phones, and gaming consoles.

Designed for portability, the monitor is lightweight and thin, making it easy to carry. It supports both copy mode (mirroring) and expansion mode, adapting to diverse usage scenarios for work, entertainment, and improved efficiency.



Figure 1.1: Front view of the Bewinner 15.6-inch Portable Monitor.

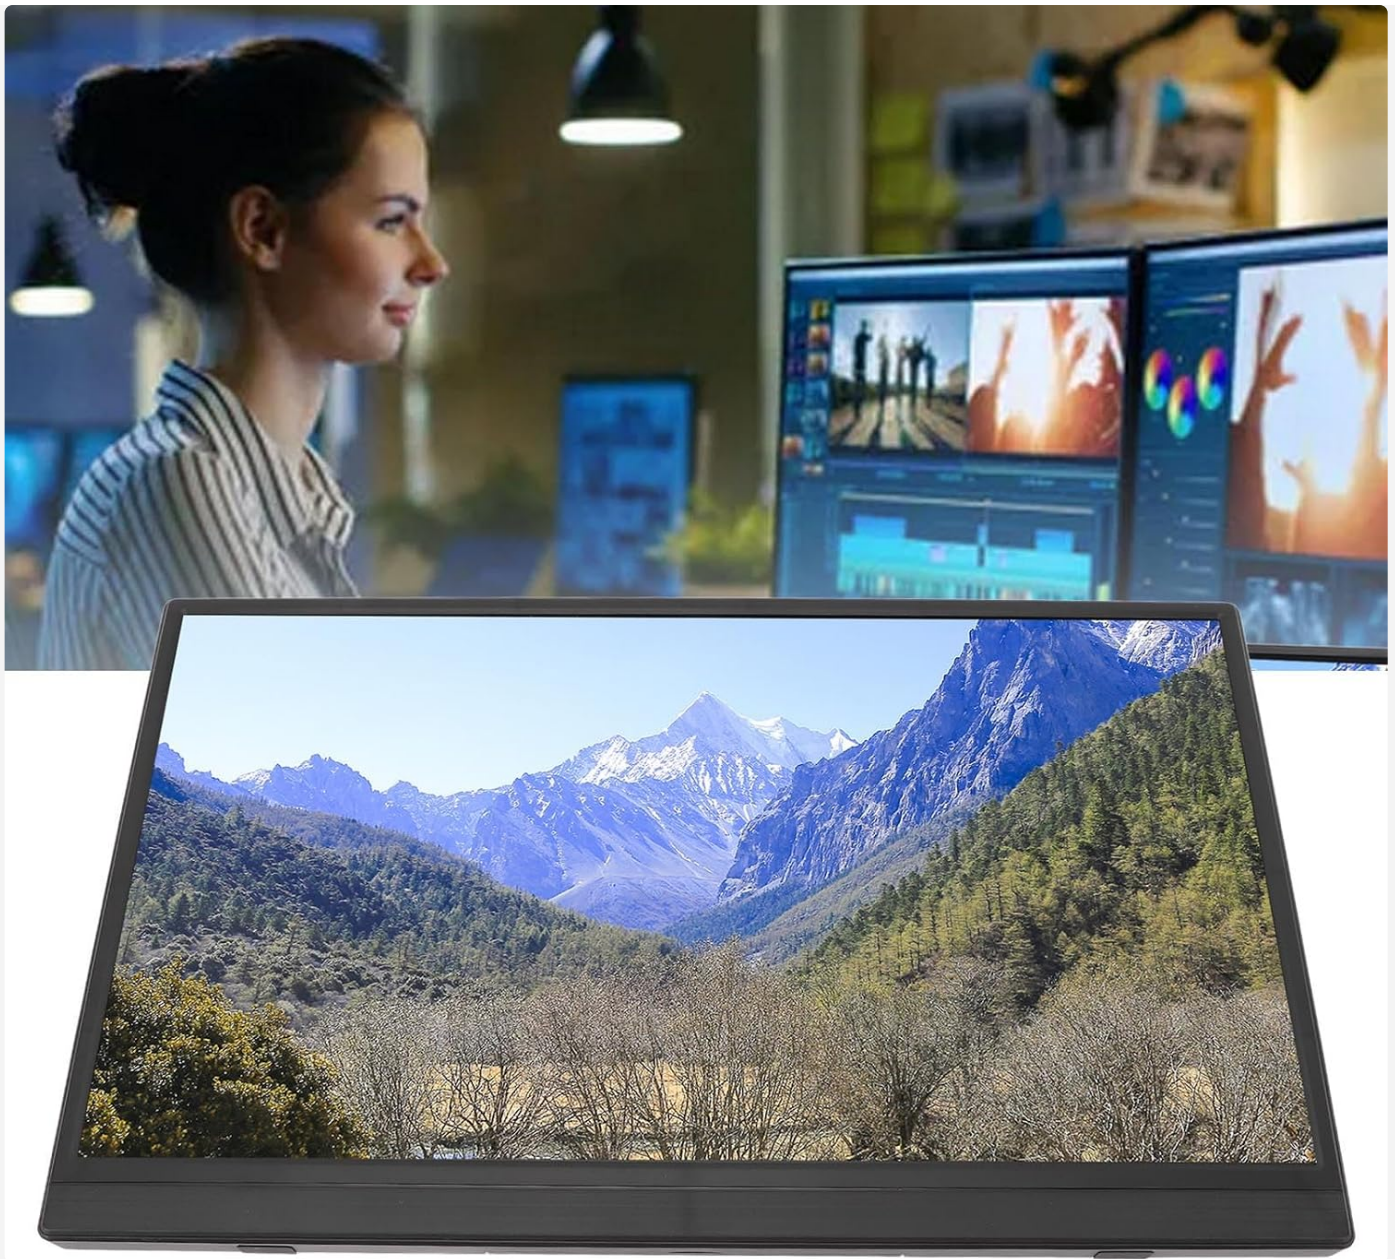


Figure 1.2: The portable monitor in a typical work environment.

2. SETUP GUIDE

Follow these steps to set up your Bewinner portable monitor:

1. **Unpack the Monitor:** Carefully remove the monitor and all accessories from the packaging. Verify that all components listed in the package contents (Portable Display Screen, HD Multimedia Interface Cable, Type C To Type C Cable, USB To Type C Cable, Instruction Manual) are present.
2. **Position the Monitor:** Utilize the integrated folding stand to position the monitor on a stable, flat surface at your desired viewing angle.
3. **Connect Power and Video (USB-C):** For devices with a full-featured USB-C port (supporting DisplayPort Alternate Mode and power delivery), connect one end of the provided Type-C to Type-C cable to the monitor's USB-C port and the other end to your device's USB-C port. This single cable can provide both video signal and power.
4. **Connect Video (HDMI) and Power (USB-C):** For devices using an HDMI output, connect one end of the provided HD Multimedia Interface Cable to the monitor's Mini HD multimedia interface port and the other end to your device's HDMI port. Then, connect the provided USB to Type-C cable to the monitor's USB-C port and the USB-A end to a power source (e.g., a USB wall adapter, laptop USB port) for power.

5. **Power On:** Press the power button on the side of the monitor to turn it on. The display should automatically detect the input signal.



Figure 2.1: Included cables for connectivity.



3. OPERATING INSTRUCTIONS

Once connected, your portable monitor is ready for use. Here are key operating functions:

- **Power On/Off:** Use the dedicated power button located on the side of the monitor to turn the display on or off.
- **On-Screen Display (OSD) Menu:** The monitor features control buttons (often a joystick or multiple buttons) on its side to access the OSD menu. This menu allows you to adjust various display settings such as brightness, contrast, color temperature, aspect ratio, and volume. Navigate the menu using the buttons and confirm selections.
- **Display Modes:** Depending on your connected device (PC, laptop), you can configure the display mode:
 - **Duplicate Mode (Mirror Mode):** The portable monitor displays the same content as your primary screen. This is useful for presentations or sharing content.
 - **Extend Mode:** The portable monitor acts as an extension of your primary screen, providing additional desktop space. This is ideal for multitasking and improving productivity.

Adjust these settings through your device's display settings (e.g., Windows Display Settings, macOS System Preferences).

- **Audio Output:** The monitor's built-in speakers will automatically play audio from the connected device. You can adjust the volume via the OSD menu or your connected device's volume controls.



Figure 3.1: Control buttons for OSD menu.

4. CARE AND MAINTENANCE

Proper care and maintenance will ensure the longevity and optimal performance of your portable monitor:

- **Cleaning the Screen:** Use a soft, lint-free cloth specifically designed for electronics. For stubborn smudges, lightly dampen the cloth with water or a screen-cleaning solution. Never spray liquid directly onto the screen.
- **Cleaning the Body:** Wipe the monitor's casing with a soft, dry cloth. Avoid using abrasive cleaners, waxes, or solvents.
- **Storage:** When not in use, store the monitor in a cool, dry place, away from direct sunlight and extreme temperatures. Use the original packaging or a protective sleeve to prevent scratches and dust accumulation.
- **Handling:** Always handle the monitor by its edges. Avoid applying pressure to the screen surface.
- **Ventilation:** Ensure the monitor's ventilation openings are not blocked to prevent overheating.

5. TROUBLESHOOTING

If you encounter issues with your Bewinner portable monitor, refer to the following troubleshooting guide:

Problem	Possible Cause	Solution
No display / Black screen	No power; Incorrect cable connection; Input source not selected; Device not outputting signal.	Ensure power cable is securely connected. Verify video cable (USB-C or HDMI) is properly connected to both monitor and device. Check if your device is powered on and configured to output to an external display. Try a different cable.
No power	Power cable not connected; Insufficient power from USB source.	Ensure the USB-C power cable is connected to a reliable power source. If using a laptop's USB port for power, ensure the laptop has sufficient power output. Try a different USB power adapter.
Image quality issues (blurry, distorted)	Incorrect resolution; Faulty cable; Graphics driver issues.	Set your device's display resolution to 1920x1080. Try a different video cable. Update your device's graphics drivers.
No sound from monitor speakers	Volume too low; Audio output not set to monitor; Muted.	Increase volume via the monitor's OSD menu or your device's sound settings. Ensure the monitor is selected as the audio output device on your computer/phone. Check if the monitor or device is muted.
Monitor not detected by device	Cable issue; Device port issue; Driver issue.	Ensure the cable is fully inserted. Try a different port on your device. Restart your device. Update graphics drivers.

If the problem persists after trying these solutions, please contact customer support.

6. TECHNICAL SPECIFICATIONS

Feature	Specification
---------	---------------

Feature	Specification
Screen Size	15.6 Inch LCD IPS Screen
Resolution	1920x1080 (Full HD)
Viewing Angle	178 Degree Full Viewing Angle
Aspect Ratio	16:9
Refresh Rate	60Hz
Color Gamut	45% NTSC
Contrast Ratio	1000:1 (Typical)
Brightness	250cd/m2
Response Time	30 (Typical) (Tr+Td) ms
Connectivity	USB-C ports, Mini HD multimedia interface
Dimensions (Product)	18.11 x 10.62 x 1.96 inches (46 x 27 x 5 cm)
Thickness	0.76cm (0.3 inches)
Item Weight	2.4 pounds (1.09 kg)
Material	Aluminum Alloy
Chipset	For RTD 2525BE

7. WARRANTY AND SUPPORT

This Bewinner portable monitor is manufactured by Bewinner. For any product-related inquiries, technical support, or warranty claims, please contact Bewinner customer service directly. Refer to the contact information provided in your product packaging or on the official Bewinner website.

Additionally, extended protection plans may be available for purchase to cover your device beyond the standard manufacturer's warranty. Please check with your retailer for details on available protection plans.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question