VOWNER VOWNER-393

VOWNER Vanity with Lighted Mirror (Model VOWNER-393)

INSTRUCTION MANUAL

Introduction

Thank you for choosing the VOWNER Vanity with Lighted Mirror. This manual provides detailed instructions for the assembly, operation, maintenance, and troubleshooting of your new vanity desk. Please read this manual thoroughly before assembly and use to ensure proper function and safety. Keep this manual for future reference.

Important Safety Information

- Avoid overloading drawers and shelves to prevent instability.
- Secure the vanity to the wall using appropriate anchoring hardware to prevent tip-over, especially in households with children or pets.
- Always assemble the vanity according to the provided instructions.
- Ensure all electrical connections for the lighted mirror and power outlet are properly installed and meet local electrical codes.
- Keep liquids away from electrical components to prevent electric shock.

Setup and Assembly

This section guides you through the assembly process of your VOWNER Vanity. It is recommended to have a second person assist with assembly. Ensure all parts are present before beginning.

Assembly Overview

The vanity utilizes a Cam Lock Fastening System and drawer slides for secure construction. Follow the step-by-step visual instructions provided in the assembly video and accompanying diagrams.

Your browser does not support the video tag.

Video: Detailed assembly guide for the VOWNER Vanity. This video demonstrates the step-by-step process for constructing the vanity desk, including the use of cam locks and drawer slides, to ensure a stable and functional unit.

Key Assembly Steps

1. **Prepare Components:** Unpack all parts and hardware. Identify each piece using the provided labels.
2. **Install Drawer Slides:** Attach the drawer slides (M1) to the designated side panels (4, 5) and the drawer components (3) using screws (F).
3. **Assemble Main Frame:** Connect the side panels (2, 6, 7, 8) and shelves (9, 11, 12) using dowels (A) and cam locks (C).
4. **Attach Power Outlet:** Secure the built-in power outlet (N) to the designated opening on the vanity frame using screws (F).
5. **Install Top Panel:** Place the top panel (1) onto the assembled frame, securing it with dowels (A) and cam locks (C).
6. **Assemble Mirror and Shelves:** Attach the mirror panel (13) and the upper storage shelves (15, 16) to the main vanity structure using screws (J) and metal plates (K).
7. **Assemble Drawers:** Construct the drawer boxes (17, 18, 19, 20, 21, 22, 23, 24) and attach the remaining drawer slides (M2) and crystal ball knobs (J, K).
8. **Assemble Stool:** Connect the stool side panels (25) with the crossbar (26) and attach the seat (27) using screws (D) and dowels (B).



Image: The VOWNER Vanity Desk with its lighted mirror, multiple drawers, and accompanying stool, showcasing its elegant design and

functional layout.

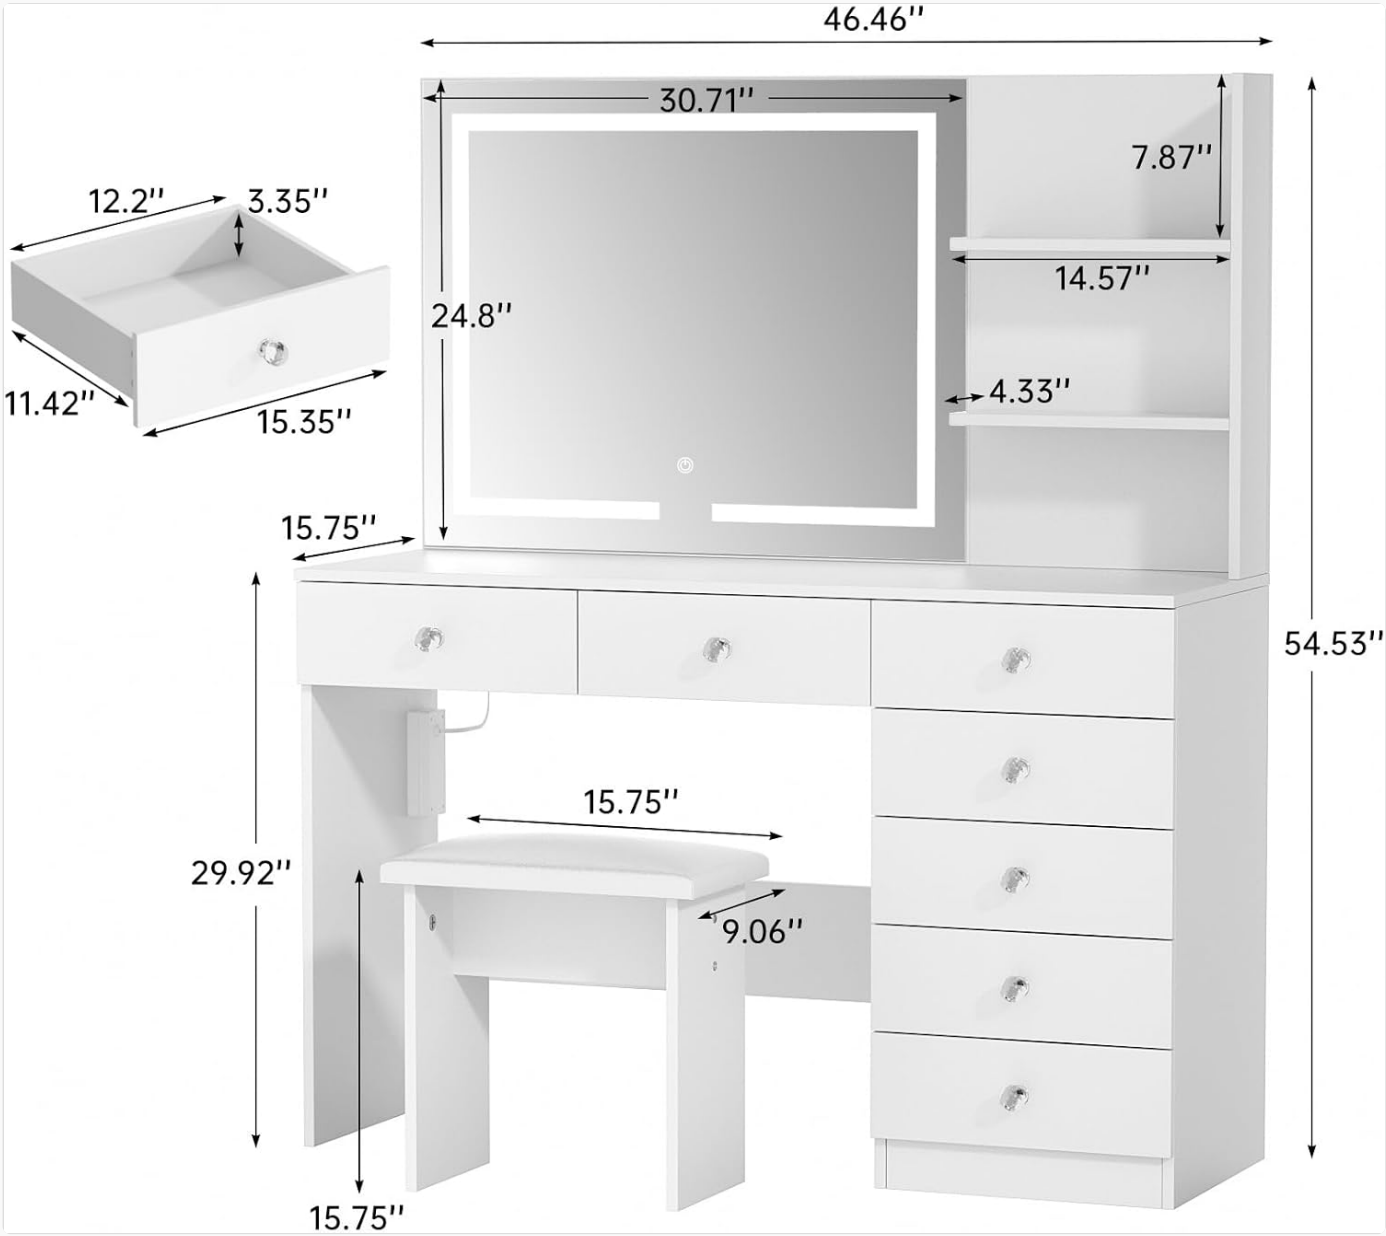


Image: A detailed diagram illustrating the dimensions of the VOWNER Vanity Desk, including the mirror, shelves, drawers, and stool, providing precise measurements for planning and placement.

Operating Instructions

Lighted Mirror Operation

The integrated LED mirror features touch controls for adjusting lighting. Locate the touch sensor on the mirror surface.

- **Power On/Off:** Tap the touch sensor once to turn the mirror lights on or off.
- **Change Color Mode:** With the lights on, tap the touch sensor repeatedly to cycle through the three color temperature modes: Warm White, Natural White, and Cool White.
- **Adjust Brightness:** Press and hold the touch sensor to smoothly adjust the brightness level. Release when the desired brightness is achieved.

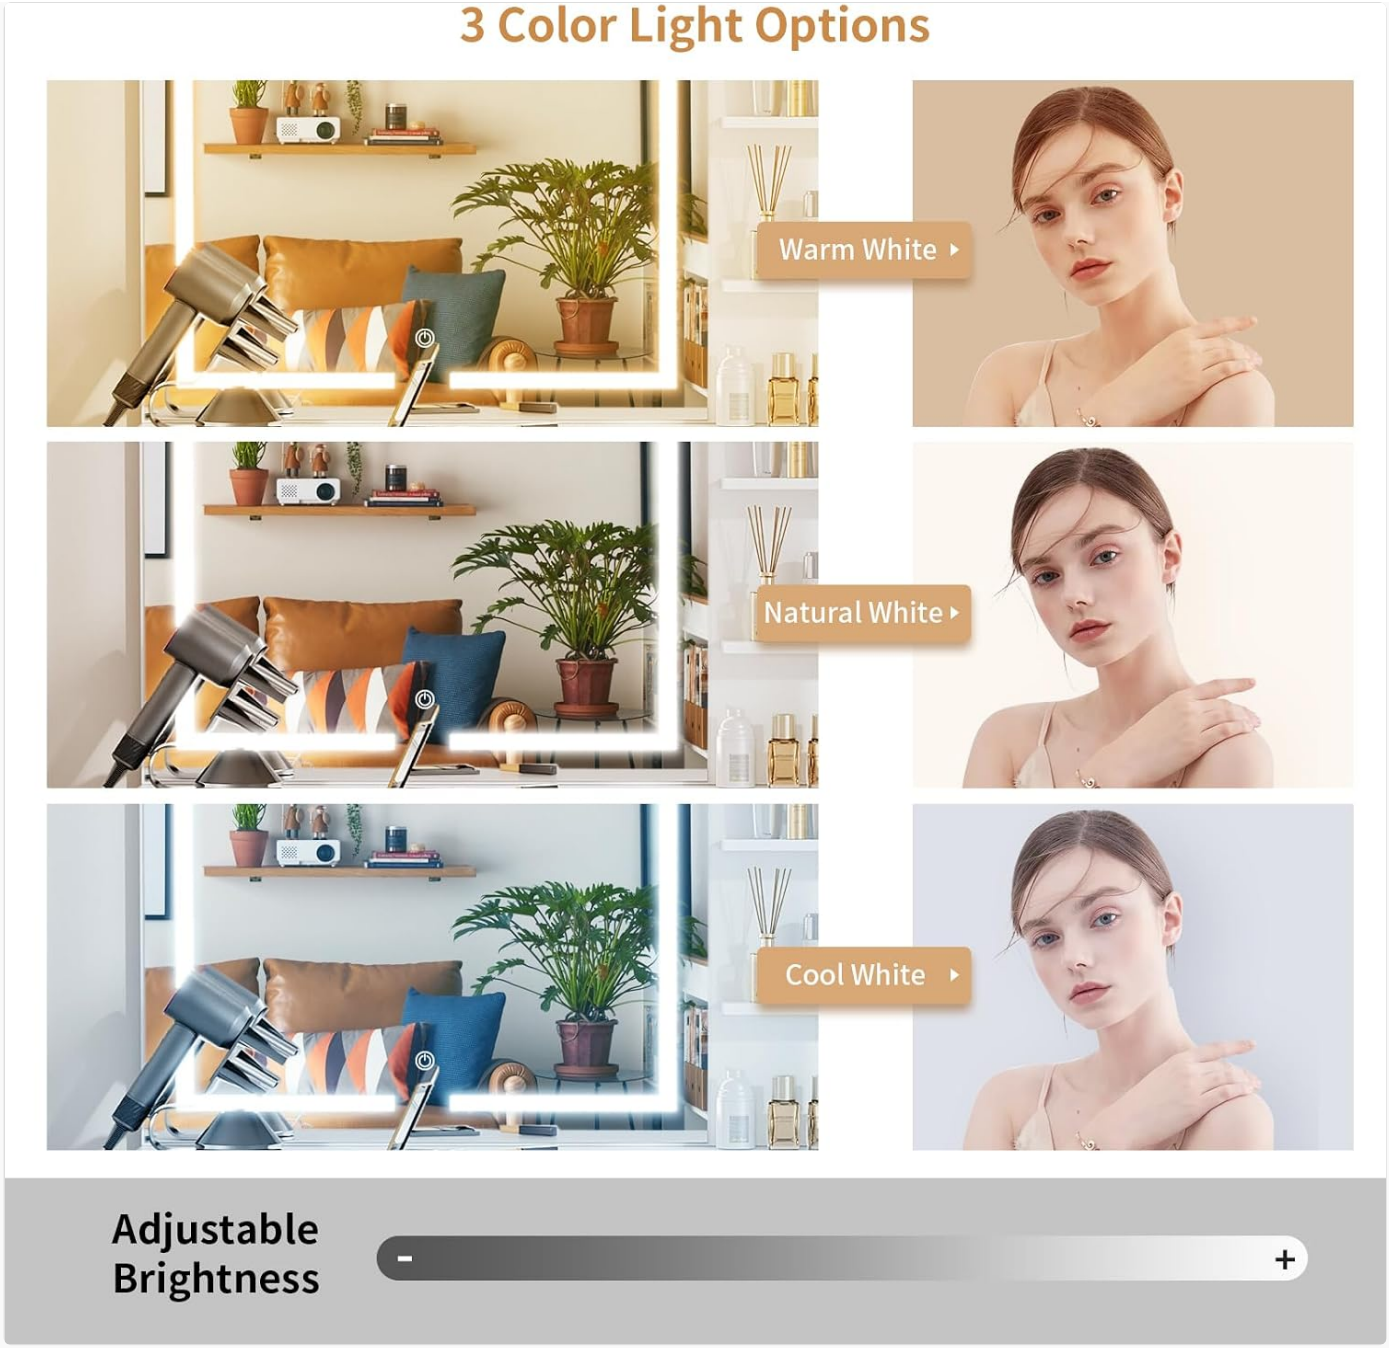


Image: Visual representation of the three color light options (Warm White, Natural White, Cool White) and the adjustable brightness feature of the vanity's lighted mirror.

Built-in Power Outlet and USB Ports

The vanity includes a built-in power strip with 2 standard AC outlets (125V/12A) and 2 USB ports (5V/2A) for convenient charging and powering of your devices.

- Plug in hair dryers, curling irons, beauty devices, or mobile phones directly into the available outlets or USB ports.
- Ensure devices are compatible with the provided voltage and amperage.



Image: Close-up view of the built-in power strip, highlighting the two standard AC outlets and two USB ports for convenient device charging and power access.

Maintenance

General Care

- **Cleaning:** Wipe the vanity surfaces with a dry cloth. For stubborn marks, use a slightly damp cloth with a mild, non-abrasive cleaner, then dry immediately.
- **Mirror Care:** Clean the mirror surface with a glass cleaner and a soft, lint-free cloth. Avoid spraying cleaner directly onto the mirror to prevent liquid from seeping into the electrical components.
- **Drawer Maintenance:** Periodically check drawer slides for smooth operation. If drawers become stiff, a small amount of silicone-based lubricant can be applied to the slides.
- **Hardware:** Regularly check all screws and fasteners to ensure they are tight. Retighten if necessary to maintain stability.
- **Avoid Direct Sunlight:** Prolonged exposure to direct sunlight can cause fading or damage to the vanity's finish.

Troubleshooting

If you encounter any issues with your VOWNER Vanity, please refer to the following common troubleshooting tips:

Problem	Possible Cause	Solution
Mirror lights not turning on.	Power cord not plugged in, loose connection, power outage, faulty sensor.	Ensure the power cord is securely plugged into a working outlet. Check the power source. Gently tap the touch sensor. If the issue persists, contact customer support.
Lights are dim or flickering.	Brightness setting too low, unstable power supply.	Adjust the brightness by pressing and holding the touch sensor. Ensure the power outlet is stable.
Drawers are difficult to open/close.	Overloaded drawer, misaligned slides, debris in slides.	Reduce contents in the drawer. Check if drawer slides are properly aligned and free of obstructions. Apply a silicone-based lubricant to the slides if needed.
Vanity feels wobbly or unstable.	Loose fasteners, uneven floor, not anchored to wall.	Check and tighten all assembly screws. Ensure the vanity is on a level surface. If not already done, secure the vanity to the wall using the provided anti-tip kit.
Power outlets/USB ports not working.	Power cord not plugged in, circuit breaker tripped, faulty unit.	Verify the vanity's main power cord is plugged in. Check your home's circuit breaker. Test with another device. If still not working, contact customer support.

Specifications

Feature	Detail
Brand	VOWNER
Model Number	VOWNER-393
Product Dimensions (L x W x H)	46.46 x 15.75 x 54.53 inches
Item Weight	109 pounds
Material	Engineered Wood Desktop
Number of Drawers	7
Special Features	3 Shelves, 7 Drawers, Adjustable Brightness Lighted Mirror, Built-In Charging Station (2 AC Outlets, 2 USB Ports)
Product Care Instructions	Wipe with Dry Cloth
Color	White

Warranty and Support

Warranty Information

Specific warranty details for your VOWNER Vanity are typically provided with the product packaging or can be obtained

directly from the manufacturer or seller. Please retain your proof of purchase for any warranty claims.

Customer Support

VOWNER is committed to providing premium service. If you require any assistance with assembly, parts, or have questions regarding your vanity, please do not hesitate to contact our customer support team. We aim to respond within 24 hours.

For support, please refer to the contact information provided in your product packaging or visit the official VOWNER store on Amazon: VOWNER Store.

© 2025 VOWNER. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question