Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Inateck KB06101

Inateck Foldable AI Keyboard with Touchpad User Manual

Model: KB06101

1. Product Overview

The Inateck Foldable AI Keyboard with Touchpad is a versatile and portable input device designed for seamless connectivity across multiple operating systems. Featuring a compact, foldable design, an integrated touchpad, and multi-device Bluetooth capabilities, it enhances productivity on the go. This manual provides detailed instructions for setup, operation, maintenance, and troubleshooting.



Figure 1: Inateck Foldable AI Keyboard in both unfolded and folded configurations, highlighting its compact design.

Your browser does not support the video tag.

Video 1: An overview of the Inateck Foldable AI Keyboard with Touchpad, showcasing its design and key features.

2. Setup

2.1 Turning On the Keyboard

To power on the keyboard, locate the power switch on the side. Slide the switch to the 'ON' position. The keyboard will automatically unfold and activate.

2.2 Bluetooth Pairing (First Use)

The Inateck keyboard supports up to 3 Bluetooth channels for multi-device connectivity. Follow these steps for initial pairing:

1. Ensure the keyboard is powered on.
2. Press and hold the **Fn** key along with one of the Bluetooth channel keys (**1**, **2**, or **3**) for 3 seconds. The corresponding indicator light will flash rapidly, indicating pairing mode.
3. On your device (e.g., smartphone, tablet, laptop), navigate to Bluetooth settings.
4. Search for "Inateck KB06101" or a similar name in the list of available devices and select it to connect.
5. Once successfully paired, the indicator light on the keyboard will stop flashing and remain solid.



Figure 2: Visual guide for initial Bluetooth pairing and subsequent reconnection.

Your browser does not support the video tag.

Video 2: Step-by-step instructions for Bluetooth pairing the KB06101 keyboard with a device.

3. Operating Instructions

3.1 Multi-Device Connectivity

The keyboard allows quick switching between up to three paired devices. Simply press **Fn + 1**, **Fn + 2**, or **Fn + 3** to switch to the corresponding device. The dedicated indicator light for each channel will illuminate to confirm the active connection.



Figure 3: Illustrates the seamless switching between multiple devices using the FN key combinations.

3.2 Touchpad Features

The integrated touchpad provides precise control and supports various multi-gesture commands for Windows and iPadOS. This eliminates the need for a separate mouse, saving space and enhancing portability.

- **Windows (Windows 10 and 11):** Supports all touch gestures including click, scroll, show desktop, and open action center.
- **iPadOS:** Supports all touch gestures.
- **Android:** Only partial touch gestures are supported.

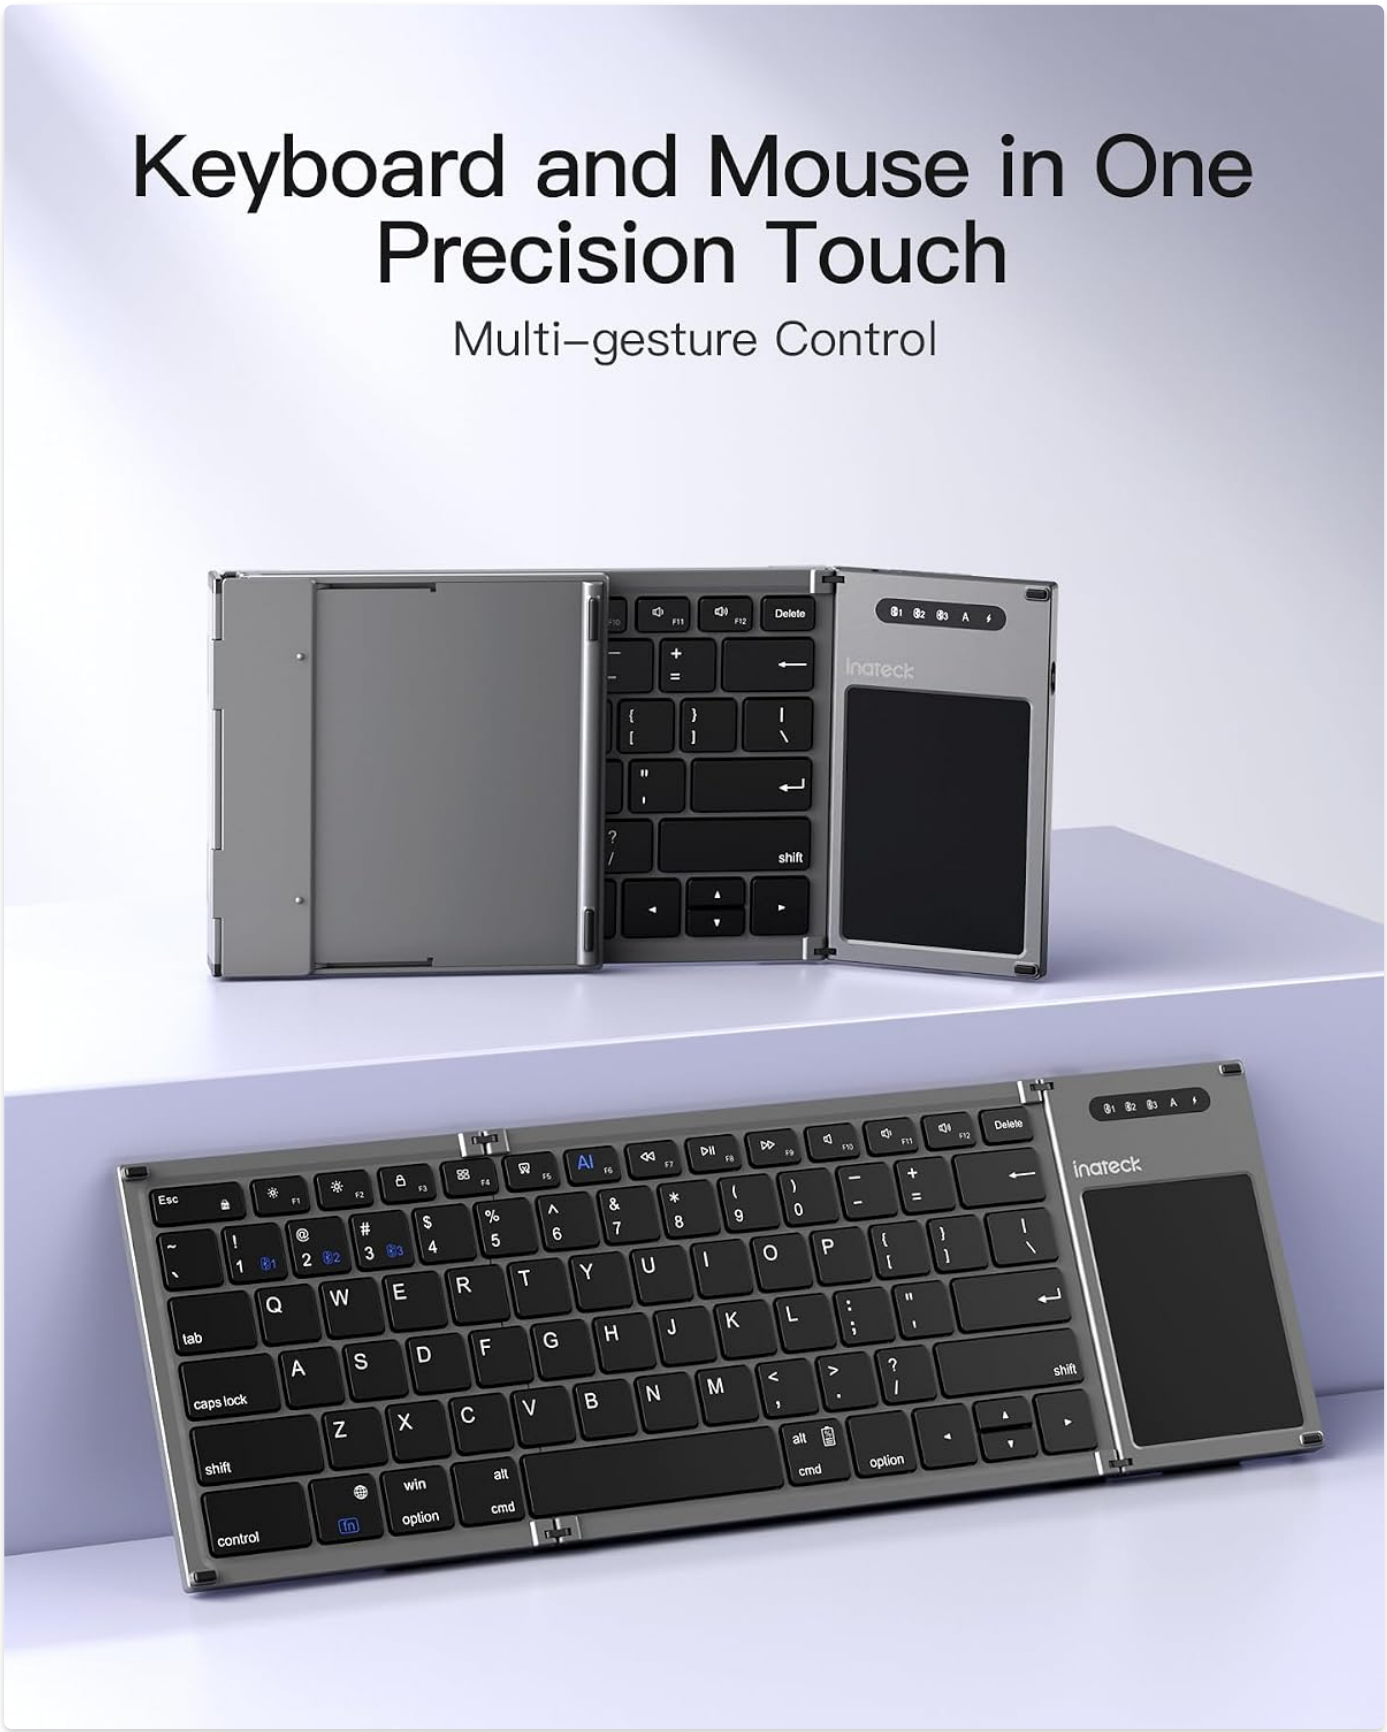


Figure 4: The keyboard's integrated touchpad for precise control and smooth operation.



Figure 5: Detailed breakdown of supported multi-touch gestures across different operating systems.

3.3 AI Key Functionality

The dedicated AI key (**F6**) instantly wakes up the Inateck Origin APP (requires prior download). This application supports slide-to-translate and AI chat functions, enhancing productivity. *Note: The AI function key is currently only supported for Windows devices.*



Figure 6: The AI key and its integration with the Inateck Origin APP for smart functions.

3.4 Typing Experience

The keyboard is designed for comfortable and quiet typing. It features 15mm x 15mm keycaps and a 1.5mm key travel, providing good pressure point support to minimize fatigue during extended use. An extra row of function shortcut keys is included for Windows and iPadOS, allowing quick adjustments to volume and screen brightness.

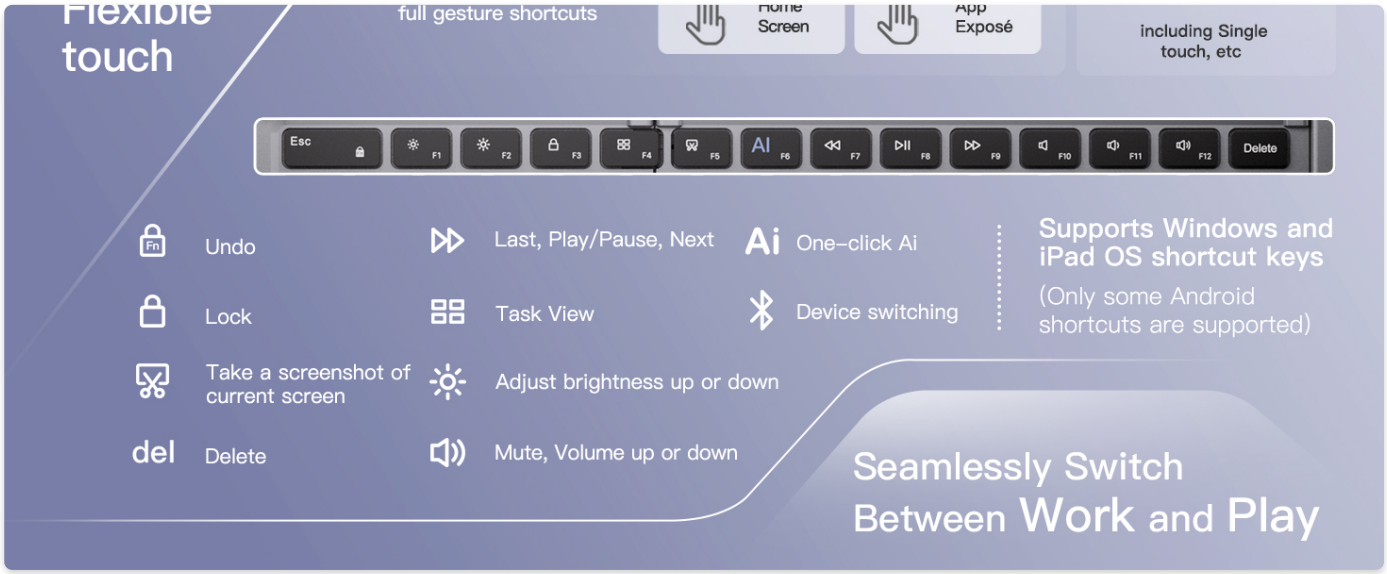


Figure 7: Details on keycap size, key travel, and additional features for an optimized typing experience.

3.5 Portability and Design

The keyboard's foldable design makes it an ideal travel companion. It folds down to a compact size of 18cm x 11.4cm x 1.8cm and weighs only 228g, allowing for easy one-handed grip and fitting into laptop bags or briefcases. The durable construction ensures a long lifespan, tested for over 10,000 opening/closing cycles.



Figure 8: The keyboard's compact size and lightweight design for easy portability.



Figure 9: Visual representation of the keyboard's robust folding mechanism and its tested durability.

3.6 Battery and Charging

The keyboard is powered by a built-in Lithium Ion battery. It offers an impressive standby time of up to 150 days and requires approximately 2 hours for a full charge. The USB-C charging port is conveniently located for easy access.



Figure 10: Information on the keyboard's battery life and charging specifications.

4. Maintenance

To ensure the longevity and optimal performance of your Inateck keyboard, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to wipe the surface of the keyboard and touchpad. For stubborn dirt, slightly dampen the cloth with water or a mild, non-abrasive cleaner. Avoid excessive moisture.

- **Storage:** When not in use, fold the keyboard to protect the keys and touchpad. Store it in a cool, dry place away from direct sunlight and extreme temperatures.
- **Handling:** Avoid dropping the keyboard or exposing it to strong impacts. Do not attempt to force the folding mechanism.

5. Troubleshooting

5.1 Bluetooth Connection Issues

If you experience issues with Bluetooth connectivity, try the following solutions:

- **Re-pairing the Device:** If a previously paired device is not connecting properly, press and hold **Fn + 1/2/3** (corresponding to the channel) for 3 seconds to re-enter pairing mode. The indicator will flash rapidly. Then, go to your device's Bluetooth settings and re-select the keyboard.
- **Factory Reset:** If re-pairing does not resolve the issue, you can reset the keyboard to factory settings. Press and hold **Fn + ESC + =** simultaneously. All 5 indicators will flash 3 times, confirming the reset. After resetting, you will need to re-pair the keyboard with your devices.

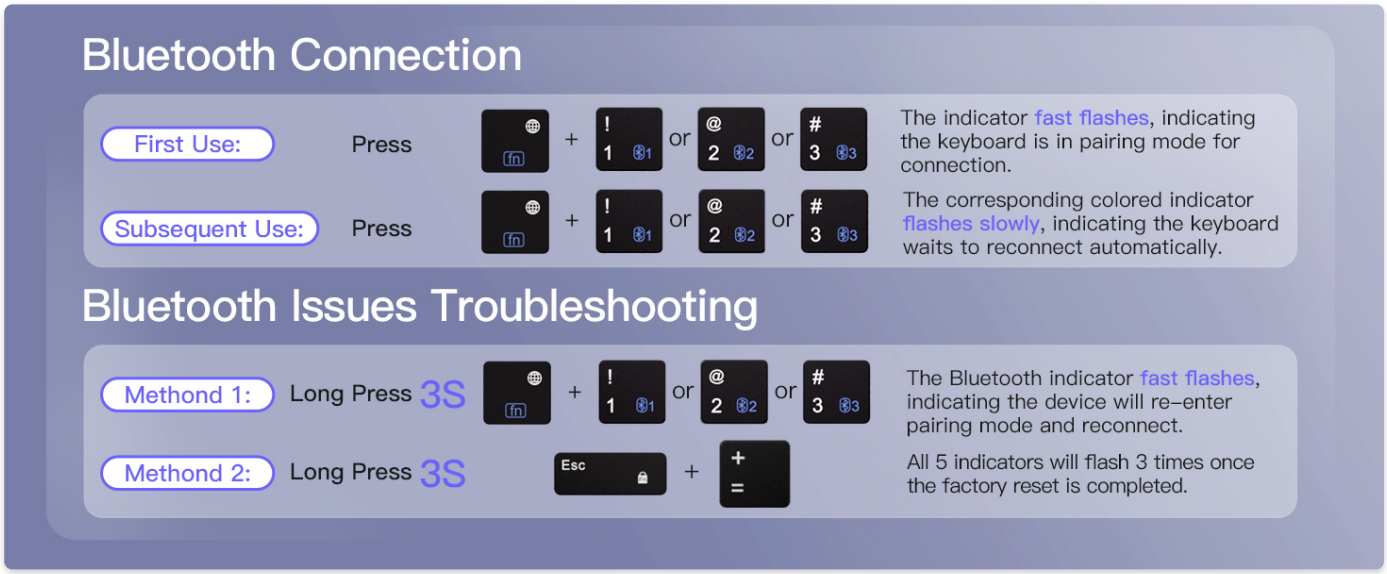


Figure 11: Visual guide for troubleshooting common Bluetooth connection problems, including re-pairing and factory reset.

6. Specifications

Feature	Specification
Product Dimensions	13.46 x 4.49 x 0.48 inches (unfolded)
Item Weight	8 ounces (228g)
Connectivity Technology	Bluetooth 5.3
Number of Bluetooth Channels	3
Compatible Devices	Windows, iPad OS, Android, iOS
Keyboard Layout	QWERTY
Special Feature	Integrated Touchpad, AI Key
Material	Plastic

Battery Type	1 Lithium Ion battery (included)
Standby Time	Up to 150 days
Charging Time	Approx. 2 hours
Included Components	1 x Keyboard

7. Warranty and Support

Inateck products come with a standard manufacturer's warranty. For detailed warranty information, technical support, or customer service inquiries, please visit the official Inateck website or contact their customer support team. Keep your purchase receipt for warranty claims.
Official Inateck Store: Inateck Amazon Store

© 2024 Inateck. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0DKDVXRSB

More documents and user manuals: **https://manuals.plus/**