

[Manuals.plus](#) /

› [NKPU](#) /

› NKPU 52-Inch Ceiling Fan with Light User Manual

NKPU SY75-Nickel

NKPU 52-Inch Ceiling Fan with Light User Manual

Model: SY75-Nickel | Brand: NKPU

INTRODUCTION

Thank you for choosing the NKPU 52-Inch Ceiling Fan with Light. This low-profile ceiling fan is designed to provide efficient air circulation and adjustable lighting for various indoor and outdoor spaces, including bedrooms, living rooms, kitchens, offices, studies, and patios. Featuring a quiet, energy-saving DC reversible motor and dimmable LED light, this fan offers comfort and convenience through remote control and mobile app operation. Please read this manual thoroughly before installation and use to ensure proper operation and safety.



Figure 1: NKPU 52-Inch Ceiling Fan with Light (Nickel finish)

SAFETY INFORMATION

Always follow basic safety precautions when installing and operating electrical appliances to reduce the risk of fire, electric shock, and personal injury.

- Read all instructions carefully before beginning installation.
- Ensure the power is turned off at the circuit breaker before installation or maintenance.
- All wiring must be in accordance with national and local electrical codes. If you are unsure about wiring, consult a qualified electrician.
- The mounting structure must be capable of supporting the weight of the fan (approximately 11.5 pounds).
- Do not operate the fan with damaged parts. Contact customer support for replacements.
- Keep hands, hair, and clothing away from moving fan blades.
- This fan is suitable for both indoor and outdoor (covered patio) use. Ensure it is not directly exposed to water.

PACKAGE CONTENTS

Verify that all components are present and undamaged before proceeding with installation.

- 1 x Ceiling Fan with Lights Kits
- 1 x Instruction Manual
- 1 x Remote Control
- Installation Accessories (screws, wires, etc.)



Quiet and energy-saving DC motor with a sound of<35db, quiet and comfortable

Figure 2: Included components for the NKPU Ceiling Fan.

SPECIFICATIONS

Feature	Detail
Brand	NKPU

Feature	Detail
Model Name	BR-SY75
Item Model Number	SY75-Nickel
Color	Nickel
Size	52 Inch
Material	Copper, Metal, Plastic
Style	Modern
Indoor/Outdoor Usage	Indoor, Outdoor (covered patio)
Power Source	AC/DC
Installation Type	Flush Mount
Special Features	Adjustable Height, Adjustable Tilt, App Operable, LED Light, Remote Controlled, Reversible Motor
Control Method	App, Remote, Wall Switch
Light Source Type	LED
Wattage	60 watts
Voltage	110 Volts
Item Weight	11.5 Pounds
Product Dimensions	16.53 x 12.59 x 6.69 inches

SETUP AND INSTALLATION

The NKPU ceiling fan features a recessed design for time-saving and labor-saving installation. Follow these steps carefully.

1. Prepare for Installation

1. Turn off power at the circuit breaker.
2. Ensure the mounting location is secure and can support the fan's weight.
3. Unpack all components and verify against the package contents list.

2. Mounting the Bracket

Secure the mounting bracket to the ceiling junction box. This fan is designed for flush mount installation.

CEILING FAN DETAIL DISPALY



Eye Care LED light



Quiet DC Motor



Double sided blade



High quality base


Figure 3: The fan supports Flush Mount installation. Angle Mount is not supported.

3. Wiring Connections

Connect the fan's electrical wires to your household wiring. Ensure all connections are secure and insulated.

Ceiling Fan with Lights

Reduces electricity costs by **80%** compared to conventional AC motors.

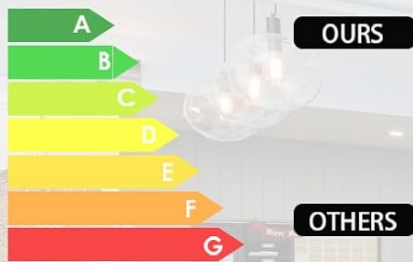

Modern Design

This 52 inch ceiling fan provides airflow to large spaces.



Double-sided blades



Eye Care LED light



Quiet DC Motor

Figure 4: Example of wiring connections. Follow the detailed wiring diagram in the included instruction manual.

4. Assembling the Fan Blades

Attach the fan blades to the motor housing. The fan comes with double-sided blades, allowing you to choose between a silvery finish or a silvery wood grain color.



Figure 5: Double-sided blades offer two aesthetic options: Silvery (A-side) and Silvery wood grain (B-side).

5. Attaching the Light Kit and Canopy

Install the LED light kit and secure the canopy to complete the installation.



Figure 6: Close-up of the Eye Care LED light, Quiet DC Motor, Double-sided blade, and High quality base. Once installed, turn the power back on at the circuit breaker.

OPERATING INSTRUCTIONS

Your NKPU ceiling fan can be operated using the included remote control or a mobile application.

Remote Control Operation

The remote control provides full functionality for your ceiling fan.

Reversible motor

Two Modes for Summer and Winter



Figure 7: Remote control layout with key functions.

- **On/Off:** Turn the fan and light on or off.
- **Fan Speed:** Adjust between 6 fan speeds. Levels 1-2 for comfortable wind (sleeping/reading), Levels 3-4 for medium wind (entertainment/party), and Levels 5-6 for cooling wind (sports/fitness).
- **Light Control:** Turn the light on/off, adjust brightness (10%-100% dimmable), and change color temperature (3000K Warm Light, 4000K Natural Light, 6000K Cool Light).
- **Reversible Motor (F/R):** Switch between forward (downdraft for summer cooling) and reverse (updraft for winter heat circulation) modes.
- **Timer:** Set a timer for automatic shut-off (e.g., 2 hours).

Outdoor & Indoor Ceiling Fan



Figure 8: The integrated LED light offers 3 color temperatures and 0-100% dimming.

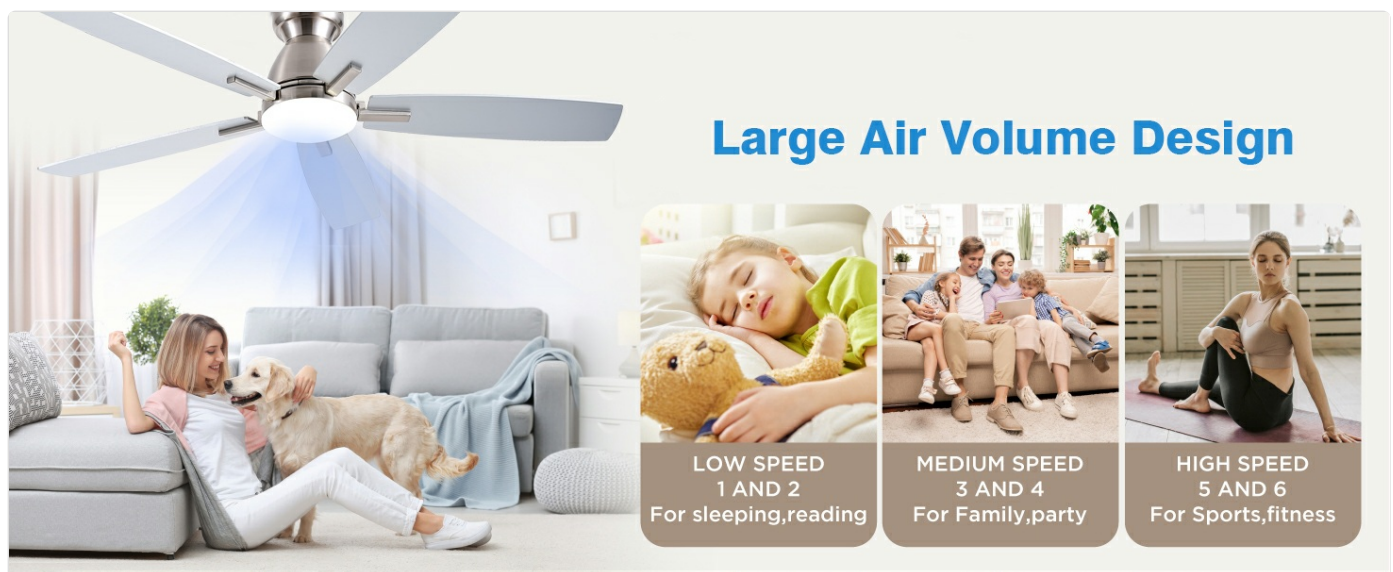


Figure 9: The reversible DC motor allows for both Summer (downdraft) and Winter (updraft) modes for optimal air circulation.

Mobile App Control

Control your fan conveniently from your smartphone using the "Fan Lamp Pro" app.

- **Download App:** Scan the QR code or visit <http://www.jasonghost.com/fanlamppro/> to download the "Fan Lamp Pro" app.
- **Pairing Steps:**
 1. Completely disconnect the power supply to the ceiling fan (via the wall switch).
 2. Turn on Bluetooth and the "Fan Lamp Pro" app on your phone in advance.
 3. Wait 10 seconds, then turn on the power switch of the ceiling fan.
 4. Press the Bluetooth pairing button in the app 5 to 6 times consecutively.
 5. If pairing is successful, the lights on the ceiling fan will flash. Ensure this process is completed within 30 seconds after the fan is powered on.
 6. If pairing fails after 30 seconds, turn off the power and repeat the steps above.
- **Note:** If no wall switch is installed, you need to press the "Overall" button on the remote control to turn off the fan's entire power supply for pairing.



One remote control can simultaneously control multiple ceiling fans with lights.

Figure 10: The "Fan Lamp Pro" app interface and remote control for comprehensive fan management.

MAINTENANCE

Regular maintenance helps prolong the life and performance of your ceiling fan.

- **Cleaning:** To avoid damage to the finish, clean the fan with a soft, damp cloth. Do not use abrasive cleaners or solvents.
- **Blade Cleaning:** Dust the fan blades regularly to maintain optimal airflow and prevent dust buildup.
- **Tightening Screws:** Periodically check all screws for tightness. Due to the fan's natural movement, some connections may become loose over time.
- **No Lubrication Needed:** The DC motor is permanently lubricated and does not require oiling.

TROUBLESHOOTING

If you experience issues with your fan, refer to the common problems and solutions below. If the problem persists, contact customer support.

Problem	Possible Cause	Solution
Fan does not start	No power to the fan; Loose wire connections; Remote control battery low or not paired.	Check circuit breaker and wall switch. Ensure all wiring connections are secure. Replace remote battery. Re-pair the remote control or app following the instructions in the "Mobile App Control" section.
Light does not work	Loose wire connection to light kit; Light kit malfunction.	Check light kit wiring. If problem persists, contact customer support for assistance.
Fan makes noise (scraping, humming)	Loose screws on fan blades or mounting bracket; Blades not balanced; Fan not perfectly level.	Ensure all screws are tightened. Check blade balance and ensure the fan is mounted level to the ceiling.
Remote control not responding or app pairing issues	Remote battery low; Interference; Incorrect pairing procedure.	Replace remote battery. Ensure no strong interference sources nearby. Follow the detailed app pairing steps in the "Mobile App Control" section carefully, especially the power cycle and rapid button presses.

Problem	Possible Cause	Solution
Fan wobbles	Loose blade screws; Improper mounting; Unbalanced blades.	Tighten all blade screws. Ensure the mounting bracket is securely installed. Use a balancing kit if necessary (not included).

WARRANTY AND SUPPORT

NKPU prioritizes customer satisfaction and is committed to providing the best products and services.

- **Warranty:** This product comes with a 24-month worry-free warranty.
- **Customer Support:** We offer 24-hour after-sales support. If you encounter any problems during the installation or use of the ceiling fan, please contact us. We are dedicated to serving you wholeheartedly.

© 2025 NKPU. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question