Manuals+
Q & A | Deep Search | Upload

Fiteye FIT-32-1300M

Fiteye 32-Inch Portable Touch Screen Monitor (Model FIT-32-1300M) User Manual

Model: FIT-32-1300M

Brand: Fiteye

1. Introduction

This manual provides comprehensive instructions for the safe and efficient use of your Fiteye 32-Inch Portable Touch Screen Monitor, Model FIT-32-1300M. Please read this manual thoroughly before operating the device and retain it for future reference.
The Fiteye portable monitor combines a 32-inch Full HD touch screen with an integrated 13MP camera, Android operating system, and a built-in battery, all mounted on a movable stand with wheels. It is designed for versatile use in various environments.

2. Package Contents

Verify that all items listed below are present in your package:

- 1 x Fiteye 32-Inch Touch Screen Monitor
- 1 x Pole
- 1 x Base
- 1 x User Manual
- 1 x Charger
- 1 x Power Cable
- 1 x Remote Control

3. Product Overview

The Fiteye 32-Inch Portable Touch Screen Monitor offers a range of features for enhanced usability and flexibility.

Figure 1: Fiteye 32-Inch Portable Touch Screen Monitor. This image displays the monitor mounted on its wheeled stand, showcasing its overall design and portability.

Key Features:

- **32-Inch Full HD Touch Screen:** Provides a 1920x1080 resolution display with touch functionality.
- **Integrated 13MP Camera:** Allows for video conferencing and calls without external peripherals.
- **Portable Design:** Equipped with a stable base and five silent wheels for easy movement between rooms.
- **Built-in Battery:** A 15000mAh battery provides approximately 6-7 hours of usage, eliminating the need for constant power outlets.
- **Android Operating System:** Supports installation of various applications from the Google Play Store.
- **Wireless Screen Casting:** Supports Apple AirPlay, Miracast, Android DLNA, and Chromecast for mirroring content from mobile devices or laptops.
- **Adjustable Screen:** Offers 90-degree vertical rotation, 10-20 degree tilt adjustment, and 6 inches of height adjustment.
- **Voice Remote Control:** Enables convenient operation from a distance.

4. Setup Instructions

Follow these steps to assemble and prepare your Fiteye Portable Monitor for first use.

4.1 Assembly

1. **Connect Pole to Base:** The three hexagonal screws required to connect the pole to the base are pre-inserted at the bottom of the pole. Unscrew them, align the pole with the base, and then re-insert and tighten the screws to secure the pole to the base.
2. **Attach Monitor to Pole:** The four corner screws for attaching the monitor to the pole are pre-inserted on the back of the monitor. Unscrew them, align the monitor with the top of the pole, and then re-insert and tighten the screws to secure the monitor.

Note: *Ensure all screws are securely tightened before moving or operating the device.*

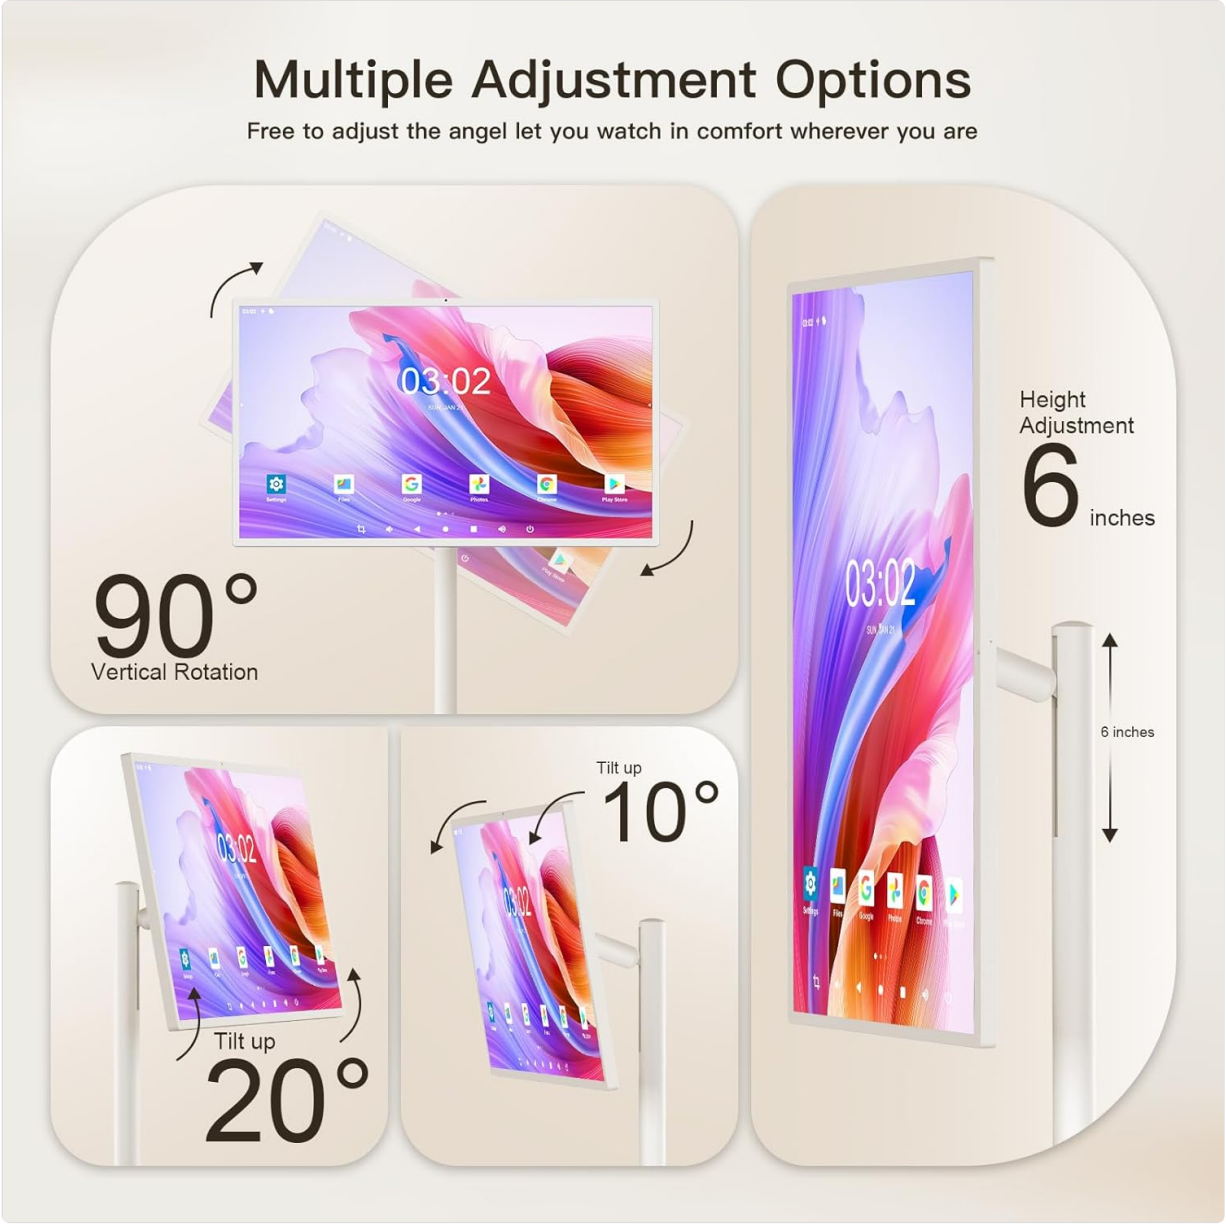

Figure 2: Multiple Adjustment Options. This diagram illustrates how the screen can be rotated 90 degrees vertically, tilted up to 20 degrees, and adjusted in height by 6 inches.

4.2 Initial Charging

Before first use, fully charge the monitor's built-in battery.

1. Connect the provided power cable to the charger.
2. Plug the charger into a standard electrical outlet.
3. Connect the other end of the power cable to the charging port on the monitor.
4. Allow the monitor to charge until the battery indicator shows a full charge.

Note: *The monitor features a 15000mAh battery, providing approximately 6-7 hours of usage on a full charge.*

5. Operating Instructions

This section details how to operate your Fiteye Portable Monitor.

5.1 Power On/Off

- To power on, press and hold the power button located on the monitor's frame until the screen illuminates.
- To power off, press and hold the power button until a power-off menu appears, then select "Power Off". A short press will put the device into sleep mode.

5.2 Touch Screen Operation

The monitor features an Incell touch screen for direct interaction.

- **Tap:** Select items or open applications.
- **Swipe:** Navigate through menus, scroll pages, or switch between screens.
- **Pinch-to-Zoom:** Adjust the zoom level in supported applications.

5.3 Remote Control Usage

The included voice remote control allows for convenient operation from a distance.

- Point the remote control towards the monitor.
- Use the directional pad and selection button to navigate the Android interface.
- Press the microphone button to activate voice commands for search and control.

Figure 3: Android Operating System. This image shows the monitor displaying the Android 12 OS home screen with

various application icons, along with the remote control used for navigation.

5.4 Android OS Navigation

The monitor runs on an Android operating system, similar to a large tablet.

- Access the Google Play Store to download and install applications.
- Navigate the home screen, app drawer, and settings using touch or the remote control.
- Utilize the built-in whiteboard application for writing, drawing, and presentations.

5.5 Wireless Screen Casting and Mirroring

Mirror content from your phone, tablet, or laptop to the monitor.

- Ensure both the monitor and your source device are connected to the same Wi-Fi network.
- On the monitor, open the screen casting application (e.g., AirPlay, Miracast, DLNA, Chromecast).
- On your source device, select the screen mirroring or cast option and choose the Fiteye monitor from the list of available devices.
- The monitor also supports wired screen casting via its HDMI interface.

Figure 4: Wireless Screen Casting. This image demonstrates how various devices like phones, tablets, and laptops can wirelessly mirror their screens to the Fiteye monitor.

5.6 Screen Adjustment

The monitor offers flexibility in screen positioning:

- **Vertical/Horizontal Rotation:** The screen can be rotated 90 degrees to switch between portrait and landscape orientations. If the screen does not rotate in one direction, attempt rotation in the opposite direction. Do not force rotation.
- **Height Adjustment:** The screen height can be adjusted by approximately 6 inches along the pole.
- **Tilt Adjustment:** The screen can be tilted up to 20 degrees for optimal viewing angles.

5.7 Integrated Camera

The 13MP integrated camera is suitable for video calls and conferencing.

- Access the camera through compatible applications (e.g., video conferencing apps).
- Ensure adequate lighting for optimal camera performance.

6. Maintenance

Proper maintenance ensures the longevity and performance of your Fiteye Portable Monitor.

- **Cleaning the Screen:** Use a soft, lint-free cloth specifically designed for electronics. For stubborn marks, lightly dampen the cloth with water or a screen-cleaning solution. Avoid harsh chemicals or abrasive materials.
- **Cleaning the Body:** Wipe the monitor's body and stand with a soft, dry cloth.
- **Battery Care:** To prolong battery life, avoid fully discharging the battery frequently. Store the device in a cool, dry place if not used for extended periods.
- **Storage:** When not in use, store the monitor in a stable position to prevent accidental tipping.

Caution: *Do not spray cleaning liquids directly onto the screen or any part of the device.*

7. Troubleshooting

This section addresses common issues you might encounter with your Fiteye Portable Monitor.

Problem	Possible Cause	Solution
Monitor does not power on.	Battery is discharged; Power cable not connected; Power button not pressed correctly.	Ensure the monitor is fully charged. Verify the power cable is securely connected. Press and hold the power button for a few seconds.
Touch screen is unresponsive.	Software glitch; Screen is dirty; Protective film still on.	Restart the monitor. Clean the screen with a soft, lint-free cloth. Remove any protective films.
Cannot connect via wireless screen casting.	Devices not on the same Wi-Fi network; Casting app not open; Network interference.	Ensure both devices are on the same Wi-Fi network. Open the appropriate casting application on the monitor. Try restarting your Wi-Fi router.

Problem	Possible Cause	Solution
Screen rotation is stuck.	Physical obstruction; Incorrect rotation attempt.	Ensure there are no obstructions. If it cannot rotate in one direction, try rotating it in the opposite direction. Do not apply excessive force.
Remote control is not working.	Low battery in remote; Obstruction between remote and monitor; Remote not paired.	Replace remote control batteries. Ensure a clear line of sight. Refer to the remote control pairing instructions (if applicable, not detailed in provided data).

8. Specifications

Detailed technical specifications for the Fiteye 32-Inch Portable Touch Screen Monitor.

Feature	Detail
Model Number	FIT-32-1300M
Screen Size	32 Inches
Screen Resolution	1920 x 1080 Pixels (Full HD 1080p)
Aspect Ratio	16:9
Screen Surface	Glossy
Operating System	Android OS (Version not specified, but implied by 'Android 12 OS' in image)
RAM	6GB
Storage	128GB
Integrated Camera	13MP
Battery Capacity	15000mAh (approx. 6-7 hours usage)
Product Dimensions (LxWxH)	15.7 x 29 x 54 inches
Item Weight	56.9 pounds
Color	Cream White

9. Warranty and Support

Fiteye is committed to providing quality products and customer satisfaction.
If you have any questions or require technical assistance with your Fiteye portable monitor, please contact our customer support team. We offer 24-hour online service and technical support.
Please refer to your purchase documentation or the Fiteye official website for specific warranty terms and contact information.

© 2025 Fiteye. All rights reserved.