Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Metz MQE7600Z, MSE3001Z

Metz Smart TV MQE7600Z and Soundbar MSE3001Z User Manual

Model: MQE7600Z (TV), MSE3001Z (Soundbar)

Introduction

This manual provides essential information for the setup, operation, and maintenance of your Metz 43-inch QLED+ Smart TV (MQE7600Z) and Metz Bluetooth Soundbar (MSE3001Z) bundle. Please read this manual thoroughly before using the products to ensure proper and safe operation. Keep this manual for future reference.



The Metz 43-inch QLED+ Smart TV MQE7600Z and MSE3001Z Soundbar bundle, showcasing both devices together.

What's in the Box

Upon unpacking, ensure all the following components are present:

- Metz 43-inch QLED+ Smart TV (MQE7600Z)
- Metz Bluetooth Soundbar (MSE3001Z)
- Remote Control
- Power Cord (for TV)
- Power Adapter (for Soundbar)
- User Manual (this document)
- 2*AAA Batteries (for remote control)
- AV Converting Cable
- 4*Base Screws
- 4*Bracket Screws
- 2*Stand Bases
- 1*Supporting Bracket

Setup Guide

1. TV Installation

You can install the TV using the included stand bases or mount it on a wall (wall mount not included). Ensure the TV is placed on a stable, level surface or securely mounted to a wall according to the wall mount manufacturer's instructions.

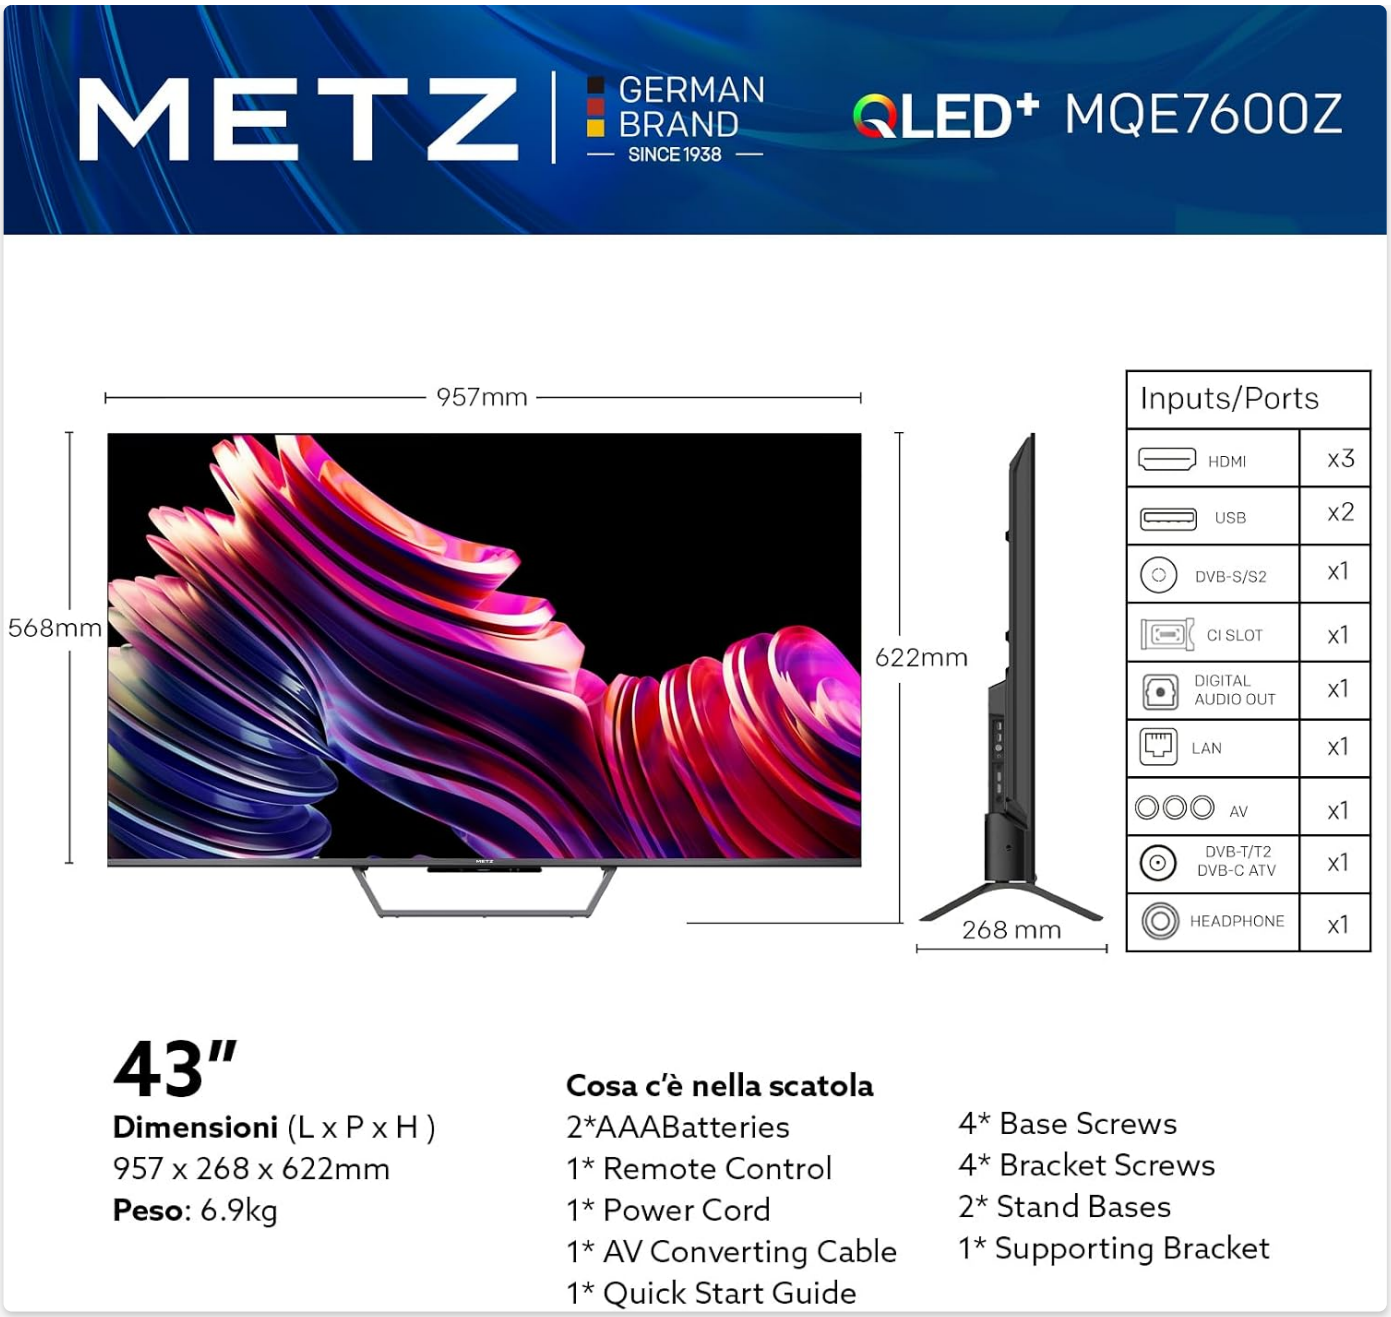


Diagram illustrating the dimensions and available input/output ports on the Metz 43-inch MQE7600Z QLED+ Smart TV, including HDMI, USB, DVB, CI Slot, Digital Audio Out, LAN, AV, and Headphone.

2. Soundbar Placement

Place the soundbar on a flat, stable surface directly in front of your TV for optimal audio experience. Ensure there are no obstructions in front of the soundbar's speakers.



The Metz MSE3001Z Soundbar positioned neatly below a television, ready for use.




Diagram detailing the physical dimensions of the Metz MSE3001Z Bluetooth Soundbar.

3. Connecting the Devices

Connect the TV to a power outlet using the provided power cord. For the soundbar, connect the power adapter to the DC IN port and then to a power outlet.

Soundbar Connectivity Options:

- **HDMI (ARC):** For high-quality audio transmission from your TV. Connect an HDMI cable from the TV's HDMI (ARC) port to the soundbar's HDMI ARC port.
- **Optical:** Connect an optical cable from your TV's optical digital audio output to the soundbar's OPT port.
- **AUX:** Use a 3.5mm audio cable to connect external devices to the soundbar's AUX port.
- **USB:** For playing audio files from a USB drive.
- **Bluetooth:** For wireless connection with compatible devices.

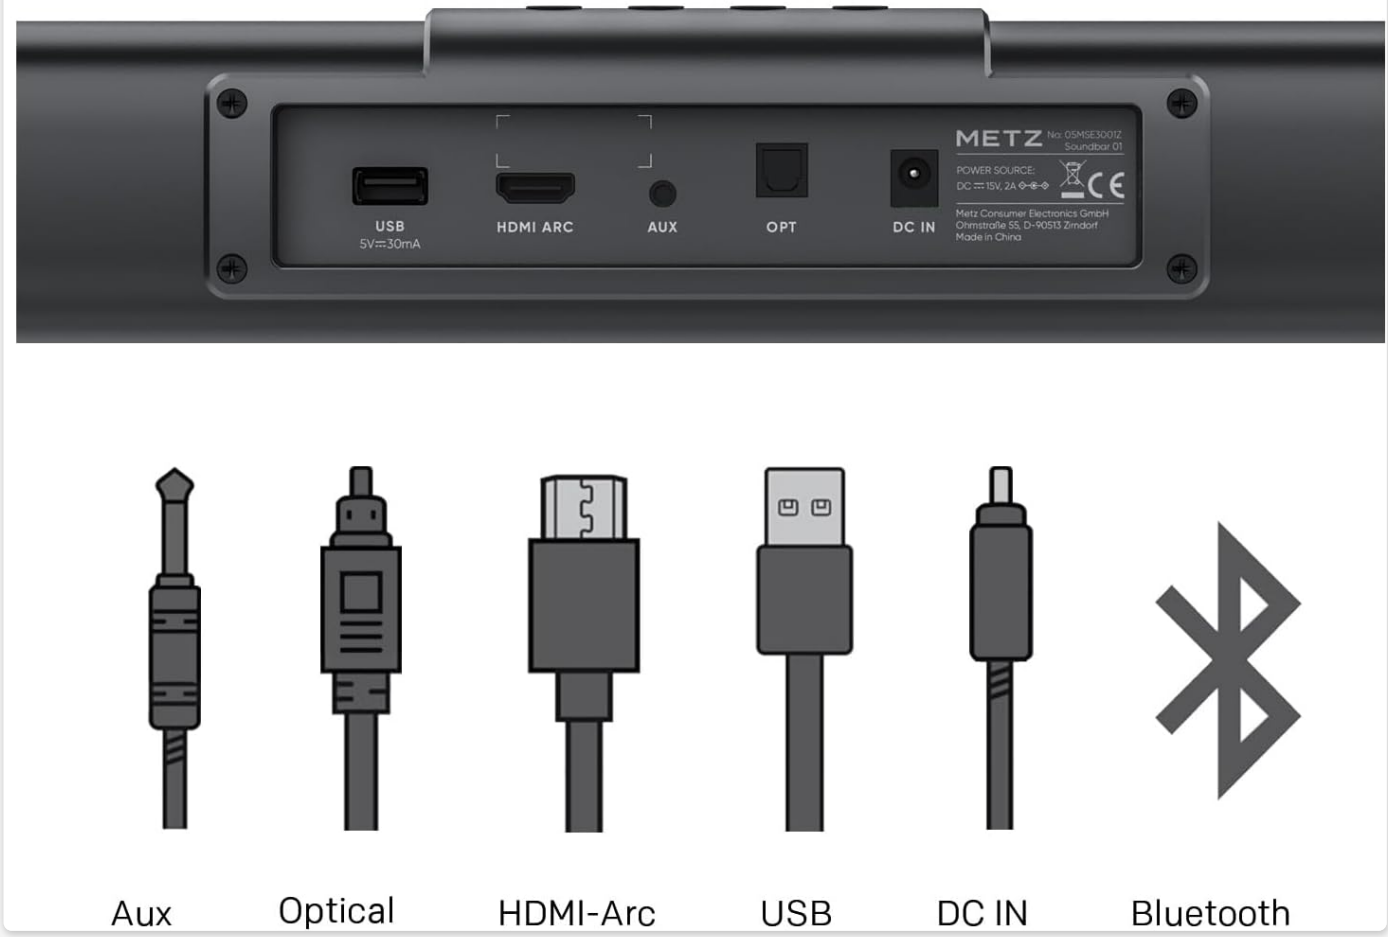

A detailed view of the Metz MSE3001Z Soundbar's rear panel, highlighting its various connectivity ports: USB, HDMI ARC, AUX, Optical, and DC IN, along with a Bluetooth icon.

4. Initial Power-On and Setup

After connecting the power, press the power button on the TV or remote control to turn on the TV. Follow the on-screen instructions for initial setup, including language selection, network connection, and Google TV account setup.

Operating Instructions

1. TV Operation (Google TV)

Your Metz MQE7600Z Smart TV runs on Google TV, providing a personalized entertainment experience. Use the remote control to navigate the interface, access streaming services, live TV, and various applications.

- **Navigation:** Use the directional pad and OK button on the remote to move through menus and select items.
- **Voice Control:** Press the Google Assistant button on your remote and speak commands to search for content, control smart home devices, and more.
- **Apps:** Download and manage apps from the Google Play Store.
- **Inputs:** Switch between different input sources (HDMI, USB, etc.) using the input button on the remote.



A visual representation of the Google TV interface on the Metz Smart TV, displaying various streaming applications and demonstrating voice command functionality.


2. Soundbar Operation

The MSE3001Z Soundbar enhances your audio experience. Use the soundbar's remote control or the buttons on the unit to control its functions.

- **Power On/Off:** Press the power button on the soundbar or its remote.
- **Input Selection:** Cycle through input modes (HDMI ARC, Optical, AUX, Bluetooth, USB) using the input button.
- **Volume Control:** Adjust volume using the volume up/down buttons.
- **Bluetooth Pairing:** Select Bluetooth mode. On your device, search for "Metz MSE3001Z" and pair.

3. Key Features

Your Metz TV and Soundbar bundle offers advanced features for an immersive viewing and listening experience.

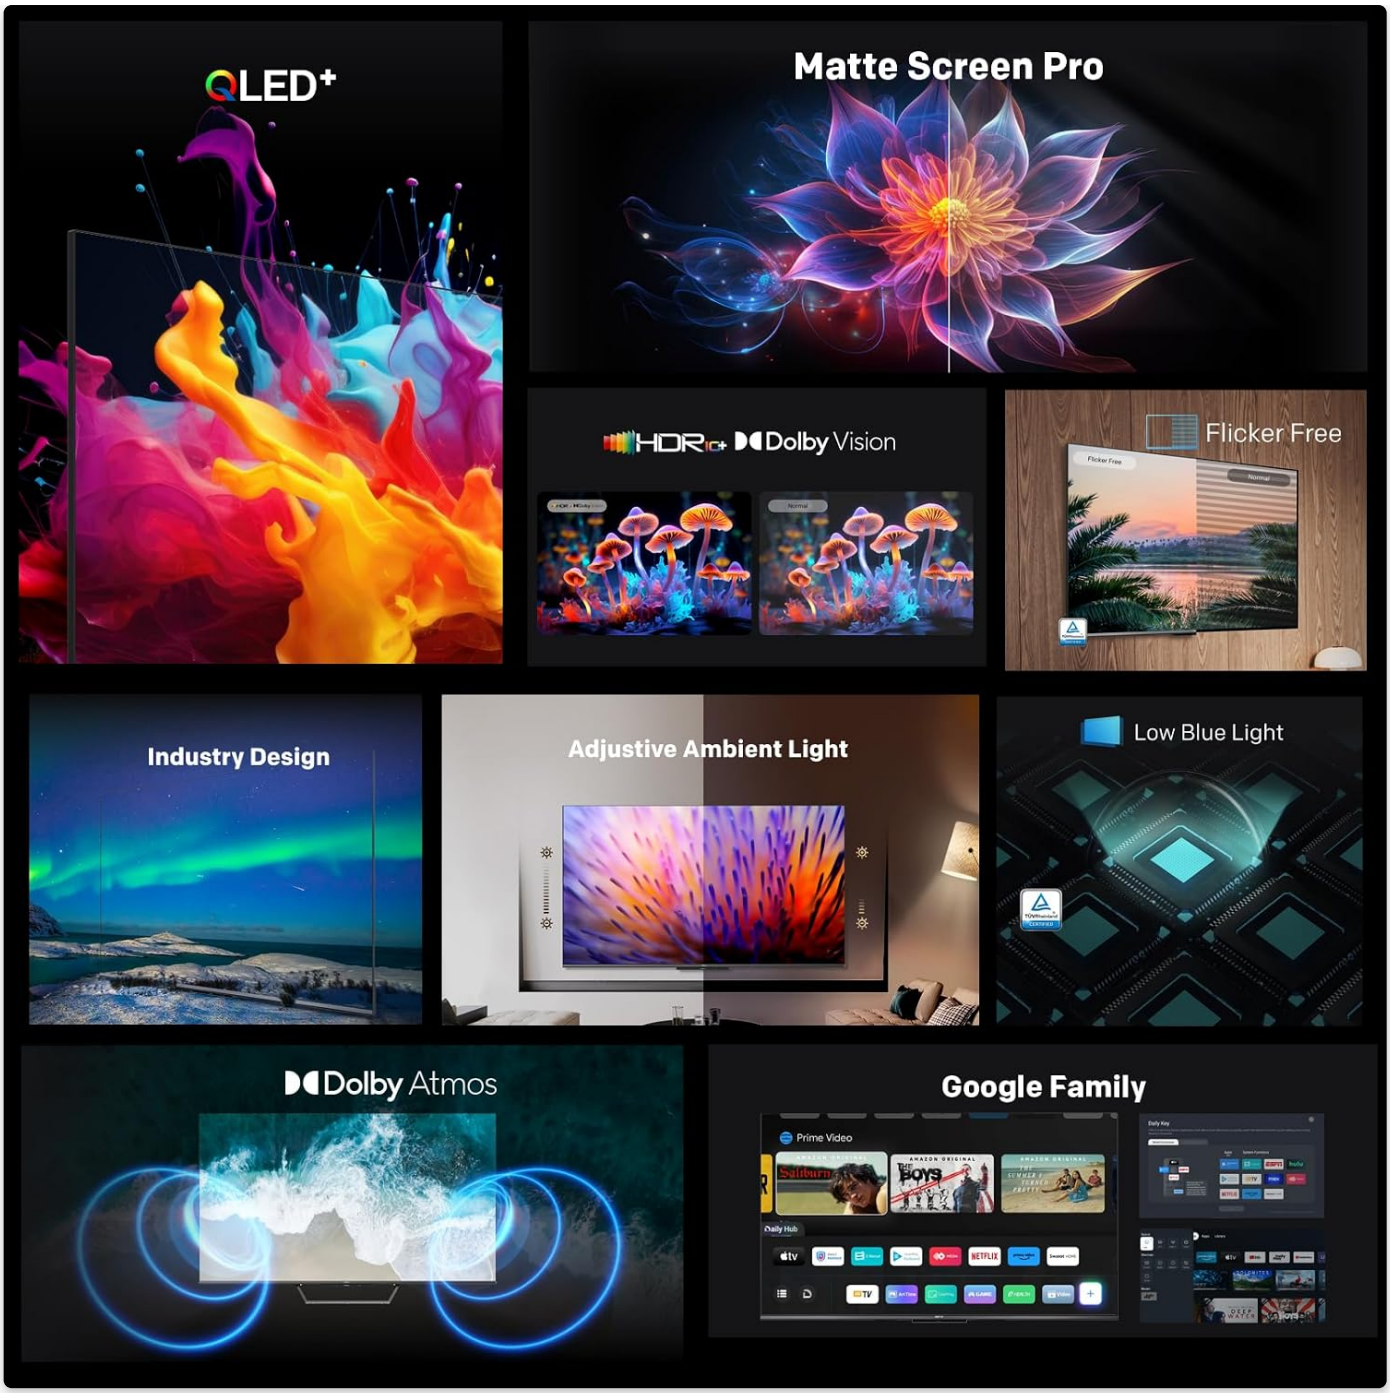

A comprehensive collage showcasing the key features of the Metz TV, including QLED+ display technology, Matte Screen Pro, HDR support, Flicker Free, Eye Care, Adaptive Ambient Light, Dolby Atmos audio, and Google Family integration.

- **QLED+ Technology:** Experience vivid and realistic colors with over 1.07 billion shades, thanks to Quantum Dot technology.



An infographic detailing the benefits of Metz QLED+ technology, highlighting its ability to reproduce 1.07 billion colors and achieve 93% DCI-P3 color space coverage.

- **HDR (Dolby Vision & HDR10+):** Enjoy enhanced contrast, brightness, and detail for a more lifelike viewing experience.



A visual comparison demonstrating the superior image quality with HDR and Dolby Vision on the Metz TV compared to a normal display, showcasing improved luminosity, vivid colors, and extraordinary realistic details.

- **Eye Care (Flicker Free & Low Blue Light):** Designed to reduce eye strain during prolonged viewing, featuring flicker-free technology and a low blue light chip.



An infographic explaining Metz Eye Care technology, which includes Flicker Free display and a Low Blue Light chip designed to reduce harmful blue light emissions in the 415-455 nm range.

- **Matte Screen:** Reduces reflections and glare, providing a comfortable viewing experience even in brightly lit rooms.



A side-by-side comparison illustrating the benefit of the Metz Matte Screen technology, showing a normal TV screen with noticeable reflections versus the Metz MQE7600 with a clear, reflection-free display.

- **Adaptive Ambient Light Sensor:** Automatically adjusts screen brightness and color temperature based on ambient light conditions, reducing visual fatigue.



An image demonstrating the Metz Adaptive Ambient Light feature, which automatically adjusts the screen's brightness and color temperature to match the room's lighting, thereby reducing eye strain.

- **Dolby Atmos (TV) & Stereo 2.0 (Soundbar):** The TV provides immersive, three-dimensional audio with Dolby Atmos, while the soundbar delivers powerful and clear stereo sound with 60W speakers.



An image depicting the Dolby Atmos audio technology, showing sound waves emanating from the Metz TV to create a realistic and immersive sound experience.

Maintenance and Care

Proper care ensures the longevity of your Metz TV and Soundbar.

- **Cleaning the Screen:** Gently wipe the screen with a soft, lint-free cloth. For stubborn marks, use a screen-specific cleaning solution applied to the cloth, not directly to the screen.
- **Cleaning the Soundbar:** Use a soft, dry cloth to wipe the soundbar's surface. Do not use liquid cleaners or abrasive materials.
- **Ventilation:** Ensure adequate ventilation around both the TV and soundbar to prevent overheating. Do not block ventilation openings.
- **Power Off When Not in Use:** For extended periods of inactivity, unplug the devices from the power outlet.

Troubleshooting

If you encounter issues, refer to the following common problems and solutions:

Problem	Possible Cause / Solution
No Power	Check if the power cord is securely plugged into the TV/soundbar and the wall outlet. Ensure the outlet has power.
No Picture (TV)	Verify the correct input source is selected. Check cable connections (HDMI, antenna).
No Sound (TV/Soundbar)	Check volume levels on both TV and soundbar. Ensure soundbar input matches TV output. If using HDMI ARC, ensure ARC is enabled on TV.
Remote Control Not Working	Replace batteries. Ensure no obstructions between remote and device. For Bluetooth remote, re-pair if necessary.
Bluetooth Pairing Issues (Soundbar)	Ensure soundbar is in Bluetooth pairing mode. Delete "Metz MSE3001Z" from your device's Bluetooth list and try pairing again. Move devices closer.
Poor Picture Quality	Check source resolution. Adjust picture settings (brightness, contrast, color). Ensure antenna/cable signal is strong.

Specifications

Metz MQE7600Z Smart TV

- **Screen Size:** 43 inches
- **Display Technology:** QLED
- **Resolution:** 4K UHD (3840 x 2160)
- **Refresh Rate:** 60Hz
- **HDR Support:** HDR10+, Dolby Vision
- **Operating System:** Google TV
- **Special Features:** Matte Screen, Eye Care (Flicker Free, Low Blue Light), Auto Ambient Light Sensor, Dolby Atmos
- **Connectivity:** HDMI (x3), USB (x2), DVB-S/S2 (x1), DVB-T/T2/C ATV (x1), CI Slot (x1), Digital Audio Out (x1), LAN (x1), AV (x1), Headphone (x1)
- **Aspect Ratio:** 16:9
- **Dimensions (L x P x H):** 957 x 268 x 622 mm (with stand)
- **Weight:** 6.9 kg

Metz MSE3001Z Bluetooth Soundbar

- **Audio System:** Stereo 2.0
- **Speaker Output:** 60W
- **Connectivity:** Bluetooth 5.4, USB, AUX, HDMI (ARC), Optical
- **Dimensions (L x H x D):** 940 x 70.5 x 92.5 mm

Warranty and Support

Metz products are designed for reliability and performance. For specific warranty details, please refer to the warranty card included with your product or visit the official Metz website. Some retailers may offer extended warranty periods, such as a four-year warranty mentioned by some customers.

For technical support, troubleshooting beyond this manual, or service inquiries, please contact Metz customer support through their official channels. Keep your purchase receipt and product serial numbers handy when contacting support.

Safety Information

Always follow basic safety precautions when using this product to reduce the risk of fire, electric shock, and injury.

- Do not expose the devices to rain or moisture.
- Do not open the casing; refer all servicing to qualified personnel.
- Avoid placing the devices near heat sources or in direct sunlight.
- Ensure proper ventilation to prevent overheating.
- Keep out of reach of children.
- Unplug the devices during lightning storms or when unused for long periods.

© 2025 Metz. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Answered questions about this manual

How do I change the menu language to Polish on the Metz 43-inch MQE7600Z TV?

The Metz 43-inch MQE7600Z runs on the Google TV operating system. To change the menu language to Polish, follow these steps using your remote control: Press the Settings button (gear icon) on your remote...

Read full answer

How can I rescan cable channels on my Metz 43" MQE7600Z TV to save only active channels and avoid saving hundreds of encrypted or inactive programs?

To resolve the issue of having too many inactive or encrypted channels on your Metz 43" MQE7600Z, you should perform a new channel scan with specific filters. Since this model runs on Google TV,...

Read full answer

Open the live page

https://manuals.plus/asin/B0DLB978CY

More documents and user manuals: **https://manuals.plus/**