

havit Fuxi-H7 White Black

Havit Fuxi-H7 Five-Mode Gaming Headset User Manual

Model: Fuxi-H7 White Black

1. INTRODUCTION

Thank you for choosing the Havit Fuxi-H7 Five-Mode Gaming Headset. This manual provides detailed instructions on how to set up, operate, and maintain your headset to ensure optimal performance and longevity. Please read this manual thoroughly before using the product.

The Havit Fuxi-H7 offers versatile connectivity options including 2.4GHz wireless, Bluetooth, USB, and 3.5mm wired connections, making it compatible with a wide range of devices such as PCs, laptops, gaming consoles (PS4/PS5, Nintendo Switch), smartphones, and tablets. It features integrated spatial audio technology, a 40mm magnetic speaker, and a detachable noise-cancelling microphone for an immersive gaming and audio experience.

2. PRODUCT OVERVIEW

2.1 Package Contents

- Havit Fuxi-H7 Gaming Headset
- Detachable Microphone
- 2.4GHz Wireless USB-C Dongle
- USB-C to USB-A Adapter
- USB-C Charging Cable
- 3.5mm Audio Cable
- User Manual (this document)

2.2 Headset Components

Familiarize yourself with the various parts of your Havit Fuxi-H7 headset:



Image: Front view of the Havit Fuxi-H7 headset showing the detachable microphone and included 2.4GHz wireless USB-A and USB-C dongles.

- **Adjustable Headband:** For comfortable fit.
- **Rotatable Earcups:** Allow for flexible positioning and storage.
- **Earcup Cushions:** Soft, breathable material for extended wear.
- **Detachable Microphone:** Flexible boom microphone with noise-cancelling capabilities.
- **Power Button:** On the left earcup, also used for play/pause and activating game mode.
- **Volume Control:** Buttons on the left earcup for adjusting volume and skipping tracks.
- **Microphone Mute Button:** On the left earcup.

- **7.1 Surround Sound / RGB Light Button:** On the left earcup, toggles 7.1 surround sound and RGB lighting.
- **USB-C Port:** For charging and wired USB connection.
- **3.5mm Audio Jack:** For wired analog connection.
- **RGB Lighting:** Integrated into the earcups.

3. SETUP

3.1 Initial Charging

Before first use, fully charge the headset. Connect the provided USB-C charging cable to the headset's USB-C port and the other end to a 5V USB power source (e.g., computer USB port, wall adapter). The charging indicator light will show charging status. A full charge takes approximately 2 hours.


All for Comfort



Adjustable
Headband



Rotatable
Earcup

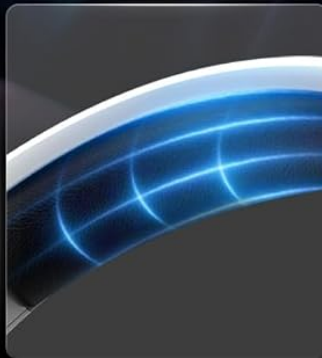

Rotatable
Earcup



Adjustable
Headband

Image: Diagram illustrating the headset's battery life (43 hours without lighting, 26 hours with lighting) and 2-hour full charge time.

3.2 Attaching the Microphone

Insert the detachable microphone into the microphone jack located on the left earcup. Ensure it is firmly seated. The microphone can be adjusted for optimal voice pickup.

43H Playtime



43H Turn
off light



26H Turn
on light



2H Fully
charged

Image: Close-up showing the detachable noise-cancelling microphone being inserted into the headset.

4. OPERATING INSTRUCTIONS

4.1 Connectivity Modes

The Havit Fuxi-H7 supports five connection modes:

USB & Type-C Plug and Play

Activate game mode by 2-tap on power button



Not Compatible with Xbox

Image: Illustration of USB and Type-C plug-and-play compatibility with PS5/PS4, Laptop, Nintendo Switch, and Phone/Tablet. Note: Not compatible with Xbox.

1. 2.4GHz Wireless (via USB-C Dongle):

- Plug the 2.4GHz USB-C dongle into your device (PC, PS5/PS4, Nintendo Switch, laptop, or phone/tablet with USB-C port). Use the USB-C to USB-A adapter if your device only has USB-A ports.
- Power on the headset. It will automatically connect to the dongle.

- This mode offers low latency (28ms) for gaming.

2. Bluetooth Wireless:

- With the headset powered on, press and hold the power button until the indicator light flashes, indicating pairing mode.
- On your device (smartphone, tablet, laptop), search for "Havit Fuxi-H7" in the Bluetooth settings and connect.

3. Wired USB (via USB-C Cable):

- Connect the USB-C cable from the headset to your device's USB-C port.
- This mode provides digital audio and charging simultaneously.

4. Wired 3.5mm (via Audio Cable):

- Connect the 3.5mm audio cable from the headset's 3.5mm jack to your device's audio output.
- This mode is purely analog and does not require headset power or battery. Microphone functionality may vary depending on the device's 3.5mm port configuration.

4.2 Controls and Functions

• Power Button:

- Press and hold to power on/off.
- Single press to play/pause audio.
- Double tap to activate game mode (when using 2.4GHz wireless).

• Volume Up/Down Buttons:

- Press to adjust volume.
- Press and hold to skip to next/previous track.

• Microphone Mute Button:

- Press to mute/unmute the microphone.

• 7.1 Surround Sound / RGB Light Button:

- Single press to toggle 7.1 surround sound on/off (available in 2.4GHz wireless and USB wired modes).
- Press and hold to turn RGB lighting on/off.

4.3 Spatial Audio and Sound Quality

The headset features integrated spatial audio technology for an immersive 360-degree surround sound experience, enhancing directional and distance perception in games. The 40mm magnetic speakers deliver strong sound quality with distinct game audio and detailed high and low frequencies for music.



7.1 Surround Sound & Power Bass

Image: Visual representation highlighting the 7.1 Surround Sound and Power Bass features of the headset.

5. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the headset. Do not use abrasive cleaners or solvents.
- **Storage:** Store the headset in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To prolong battery life, avoid fully discharging the battery frequently. Charge the headset regularly,

even if not in use for extended periods.

- **Microphone Care:** Handle the detachable microphone carefully. Avoid bending it excessively.

6. TROUBLESHOOTING

Problem	Possible Cause	Solution
No sound from headset.	Headset not powered on; incorrect connection mode; low battery; device volume too low.	Ensure headset is powered on and charged. Verify correct connection mode (2.4GHz dongle, Bluetooth, wired). Check device volume settings.
Microphone not working.	Microphone not properly attached; microphone muted; incorrect input device selected on computer.	Ensure microphone is fully inserted. Press the microphone mute button to unmute. Check sound input settings on your device.
Bluetooth pairing failed.	Headset not in pairing mode; device too far; interference.	Ensure headset is in pairing mode (flashing indicator). Move headset closer to device. Turn off other Bluetooth devices.
2.4GHz wireless connection unstable.	Dongle not properly inserted; interference; distance.	Ensure dongle is fully inserted. Avoid obstacles between headset and dongle. Reduce distance.

7. SPECIFICATIONS

Feature	Detail
Speaker Diameter	40mm
Impedance	32Ω ±15%
Sensitivity	110dB ±3dB
Frequency Response	20Hz – 20kHz
Microphone Size	ø6.0 x 2.7 mm
Microphone Sensitivity	-42dB ±3dB
Wireless Distance	10 meters
Connectivity	2.4GHz (Type-C + USB), Bluetooth, USB-C Wired, 3.5mm Wired
Battery Capacity	750mAh Lithium Battery
Charging Time	Approx. 2 hours
Charging Method	USB-C 5V
Low Latency (2.4G)	28ms

Feature	Detail
Dimensions	86 x 173 x 201 mm
Weight	247g
Gaming Autonomy (2.4G, no light)	30 hours
Gaming Autonomy (2.4G, with light)	20 hours
Gaming Autonomy (Bluetooth, no light)	43 hours
Gaming Autonomy (Bluetooth, with light)	26 hours

8. WARRANTY AND SUPPORT

The Havit Fuxi-H7 Gaming Headset comes with a manufacturer's warranty of **01 year** from the date of purchase. This warranty covers manufacturing defects and malfunctions under normal use.

The warranty does not cover:

- Damage caused by misuse, abuse, accident, or negligence.
- Damage from unauthorized repair or modification.
- Normal wear and tear.
- Damage from exposure to water or extreme conditions (product is not water-resistant).

For warranty claims or technical support, please contact your retailer or Havit customer service with your proof of purchase.

© 2025 Havit. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question