

## YITAHOME MAYIHIDtYe

# YITAHOME 52-inch Black Ceiling Fan with Light and Remote (Model MAYIHIDtYe) - Instruction Manual

## INTRODUCTION

---

Thank you for choosing the YITAHOME 52-inch Black Ceiling Fan with Light. This manual provides detailed instructions for the safe installation, operation, and maintenance of your new ceiling fan. Please read this manual thoroughly before installation and keep it for future reference.

## IMPORTANT SAFETY INFORMATION

---

**WARNING:** To reduce the risk of fire, electric shock, or personal injury, always follow these basic precautions:

- Read all instructions carefully before installing and operating the fan.
- Ensure all electrical connections comply with local codes, ordinances, and the National Electrical Code (NEC).
- All wiring must be performed by a qualified electrician.
- Disconnect power at the main circuit breaker before working on the fan.
- The fan must be mounted to a ceiling joist or support structure capable of supporting a minimum of 35 lbs (15.9 kg).
- Do not bend the blade holders during installation, balancing, or cleaning.
- Keep hands clear of the fan blades when the fan is operating.
- Do not operate the fan if any part is damaged.
- This fan is designed for indoor use only.

## PACKAGE CONTENTS

---

Verify that all components listed below are included in your package:

- Ceiling Fan Motor Assembly
- Fan Blades (3)

- Remote Control and Receiver
- Downrods (4.5 inches and 12 inches)
- Mounting Bracket
- Canopy
- Light Kit Assembly
- Hardware Pack (screws, washers, wire nuts)
- Instruction Manual

## SETUP AND INSTALLATION

---

Proper installation is crucial for the safe and efficient operation of your ceiling fan. If you are unsure about any steps, consult a qualified electrician.

### 1. Prepare for Installation


- Turn off power at the circuit breaker.
- Ensure the mounting location can support the fan's weight.
- Gather necessary tools (screwdriver, wire strippers, ladder, etc.).

### 2. Install Mounting Bracket

Secure the mounting bracket to the ceiling junction box. Ensure it is firmly attached to a structural beam.

### 3. Assemble Downrod and Motor

Choose the appropriate downrod (4.5 inches or 12 inches) for your ceiling height. Feed the motor wires through the downrod and secure the downrod to the motor assembly.

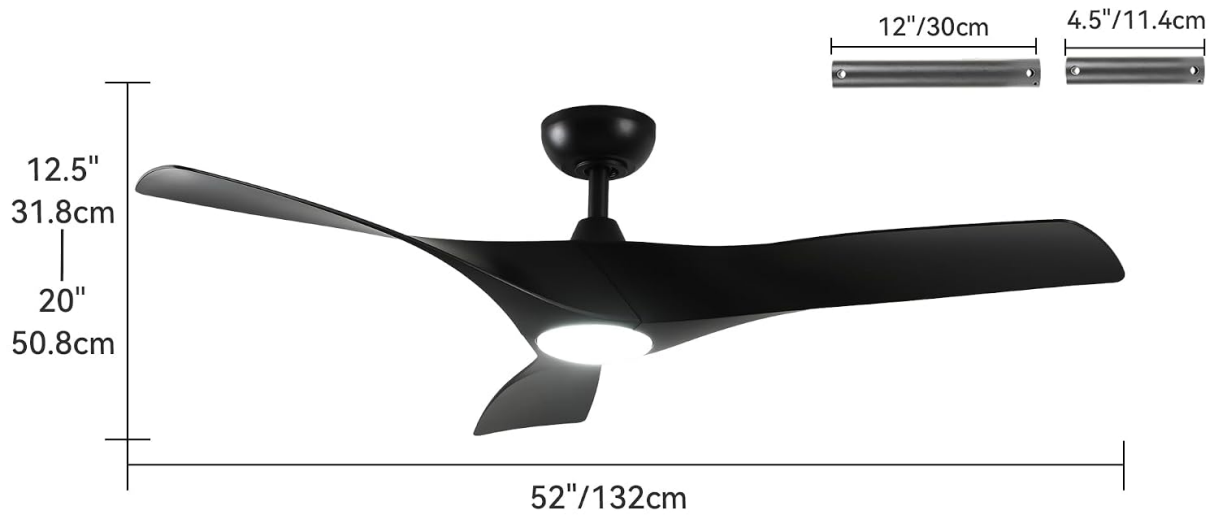

## MOUNTING OPTION

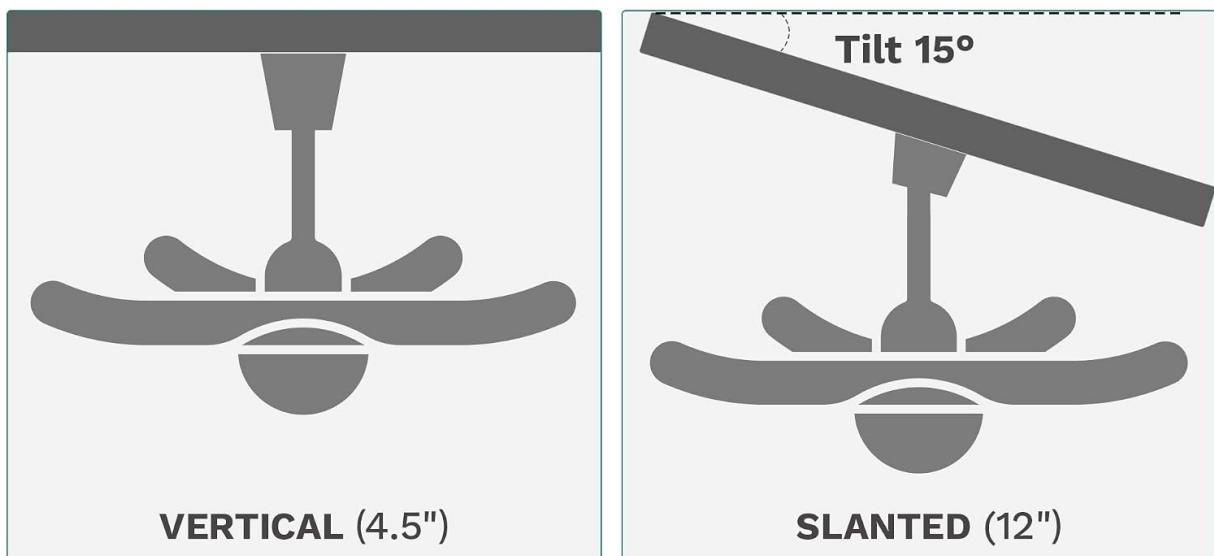


Image: Mounting options for the ceiling fan, illustrating both vertical (4.5-inch downrod) and slanted (12-inch downrod, up to 15-degree tilt) installations.

### 4. Hang Fan Assembly

Carefully lift the fan motor assembly and hang it on the mounting bracket hook (if available) or have someone assist you while making electrical connections.

### 5. Electrical Connections

Connect the fan's electrical wires to the house wiring according to the wiring diagram provided in the separate wiring guide. Ensure all connections are secure with wire nuts.

### 6. Attach Fan Blades

Securely attach the three fan blades to the motor housing using the provided screws. Ensure all screws are tightened.

### 7. Install Light Kit

Connect the light kit wires to the fan motor assembly wires and secure the light kit to the bottom of the fan motor housing.

### 8. Secure Canopy

Slide the canopy up to the ceiling and secure it to the mounting bracket with the provided screws, ensuring all wiring is neatly tucked inside.

## OPERATING INSTRUCTIONS

---

Your YITAHOME ceiling fan is controlled by the included remote control. Ensure batteries are installed correctly in the remote.



Image: The YITAHOME ceiling fan installed, demonstrating remote control functionality.

### Remote Control Functions:



Image: Detailed view of the remote control, highlighting buttons for various fan and light functions.

- **Power On/Off:** Press the power button to turn the fan on or off.
- **Fan Speed (1-6):** Use buttons 1 through 6 to adjust the fan speed. Level 1-2 is ideal for sleeping or reading, Level 3-4 for general comfort or parties, and Level 5-6 for fitness or sports activities.



Image: Visual guide for recommended fan speed levels based on activity.

- **Light On/Off:** Press the light bulb button to turn the light on or off.
- **Light Color Temperature:** Press the "Light CCT" button to cycle through 3000K (Warm White), 4500K (Clear White), and 6000K (Cool White) color temperatures.



Image: Demonstration of the adjustable light color temperatures (Warm White, Clear White, Cool White).

- **Forward/Reverse Rotation:** Press the forward/reverse button to change the direction of the fan blades.
  - **Summer Mode (Downdraft):** Blades rotate counter-clockwise, pushing cool air down.
  - **Winter Mode (Updraft):** Blades rotate clockwise, pulling warm air up.



Image: Explanation of summer (downdraft) and winter (updraft) fan modes.

- **Timer Modes:** Set the fan to turn off automatically after 1, 2, 4, 8, or 12 hours.
- **Natural Wind Mode:** Activates a varying fan speed to simulate a natural breeze.
- **Sleep Mode:** The fan will automatically cycle through wind speeds 1-3 to provide a comfortable sleeping environment.

### Video Demonstration:

Your browser does not support the video tag.

Video: A brief demonstration of the YITAHOME ceiling fan's features and operation.

## MAINTENANCE

---

Regular maintenance ensures the longevity and optimal performance of your ceiling fan.

- **Cleaning:** Periodically clean the fan blades and motor housing with a soft, damp cloth. Do not use abrasive cleaners or solvents.
- **Tighten Screws:** Check all screws on the fan blades and mounting hardware annually to ensure they are secure.
- **Lubrication:** The DC motor is permanently lubricated and does not require additional oiling.
- **Light Kit:** If the LED light fails, contact customer support for assistance. Do not attempt to replace the

LED module yourself.

## TROUBLESHOOTING

If you experience issues with your ceiling fan, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Fan does not start	No power to the fan; Loose wire connections; Remote control issues.	Check circuit breaker; Verify all wire connections are secure; Replace remote batteries; Re-pair remote if necessary.
Fan is noisy	Loose screws; Blades unbalanced; Motor housing rubbing.	Tighten all blade and mounting screws; Check for bent blades; Ensure canopy is not touching the ceiling.
Light does not work	Loose wire connection; Faulty LED module.	Check light kit wiring connections; Contact customer support for LED module replacement.
Remote control not working	Dead batteries; Remote not paired.	Replace batteries; Follow remote pairing instructions (refer to separate remote manual if provided).

## SPECIFICATIONS

Feature	Detail
Brand	YITAHOME
Model Number	MAYIHIDtYe
Size	52 inches
Number of Blades	3
Color	Black
Motor Type	DC Motor
Number of Speeds	6
Light Type	Integrated LED
Color Temperature	Adjustable (3000K, 4500K, 6000K)
Control Method	Remote Control
Timer Modes	1H, 2H, 4H, 8H, 12H
Downrod Lengths	4.5 inches, 12 inches
Sloped Ceiling Support	Up to 15 degrees
Noise Level	35 Decibels (Quiet Operation)
Wattage	22 watts

Product Dimensions	52"D x 52"W x 20"H
Item Weight	16.3 Pounds
Indoor/Outdoor Use	Indoor

**ENERGYGUIDE**

**Estimated Yearly Energy Cost**  
**\$6**

**Airflow**  
**4,214**  
Cubic Feet Per Minute

• The higher the airflow, the more air the fan will move  
• Airflow Efficiency: 195 Cubic Feet Per Minute Per Watt

**\$3** | | | **\$34**

Cost Range of Similar Models (19" – 84")  
• Based on 12 cents per kWh and 6.4 hours use per day  
• Your cost depends on rates and use  
• Energy Use: 22 Watts

All estimates based on typical use, excluding lights **ftc.gov/energy**

Image: EnergyGuide label providing estimated yearly energy cost and airflow information.

## WARRANTY AND SUPPORT

YITAHOME products are designed for quality and durability. For specific warranty details, please refer to the warranty card included with your purchase or visit the official YITAHOME website.

If you encounter any issues or have questions regarding your YITAHOME ceiling fan, please contact our customer support team:

- **Email:** [\[Insert Customer Support Email Here\]](#)
- **Phone:** [\[Insert Customer Support Phone Number Here\]](#)
- **Website:** [www.yitahome.com](http://www.yitahome.com)

Please have your model number (MAYIHIDtYe) and purchase date ready when contacting support.