Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

oneisall FC09

oneisall Dog Clippers and Paw Trimmer User Manual

Model: FC09 | Brand: oneisall

1. Introduction

The oneisall 4-in-1 Cordless Dog Grooming Kit is designed to provide a comprehensive and stress-free grooming experience for your pets. This versatile tool features a standard blade, paw trimmer blade, nail grinder, and a detail blade, allowing for full-body grooming without the need for multiple devices. Its low-noise design (as low as 49dB) ensures a calm environment for your pet, while the IPX7 waterproof rating simplifies cleaning.



Figure 1: The oneisall 4-in-1 Dog Grooming Kit, showcasing the main unit, interchangeable heads, and guide combs. This kit is designed for comprehensive pet grooming, including body, paw, face, and nail care.

2. What's Included

Your oneisall 4-in-1 Cordless Dog Grooming Kit includes the following components:

- Main Grooming Unit (Cordless)
- Standard Blade Head
- Paw Trimmer Blade Head
- Nail Grinder Head

- Detail Blade Head
- 4 Standard Guide Combs (3mm, 6mm, 9mm, 12mm)
- 1 Curved Head Guide Comb (3mm)
- USB Type-C Charging Cable
- Cleaning Brush
- Lubricating Oil



Figure 2: All components of the grooming kit, including the main unit, various interchangeable heads, multiple guide combs, charging cable, and maintenance accessories.

3. Setup

3.1 Charging the Unit

Before first use, fully charge the grooming unit. Connect the provided USB Type-C charging cable to the port at the bottom of the unit and plug the other end into a compatible USB power source (e.g., wall adapter, computer, portable charger). The LED display will indicate the charging status. A full charge provides approximately 2.5 hours of runtime.



Figure 3: The Type-C charging port located at the base of the grooming unit, illustrating convenient charging options.

3.2 Attaching and Removing Blade Heads

To attach a blade head, align the head with the main unit and gently push until it clicks into place. To remove a blade head, firmly grasp the main unit and the blade head, then twist or pull according to the specific head design (refer to the video for visual guidance). Ensure the unit is powered off before changing heads.

Video 1: This official oneisall video demonstrates the process of attaching and removing the various blade heads, including the detailed trimmer, curved head, standard cutter, and nail grinder. It also shows the ease of switching between functions and the safe shaving capabilities.

4. Operating Instructions

4.1 Power On/Off and Speed Adjustment

Press the power button to turn the unit on or off. The LED display will show the current battery level and RPM speed. Use the '+' and '-' buttons to adjust between three speed levels (6000 RPM, 6500 RPM, 7000 RPM). Lower speeds are suitable for sensitive areas or pets, while higher speeds are for thicker coats and efficient grooming.

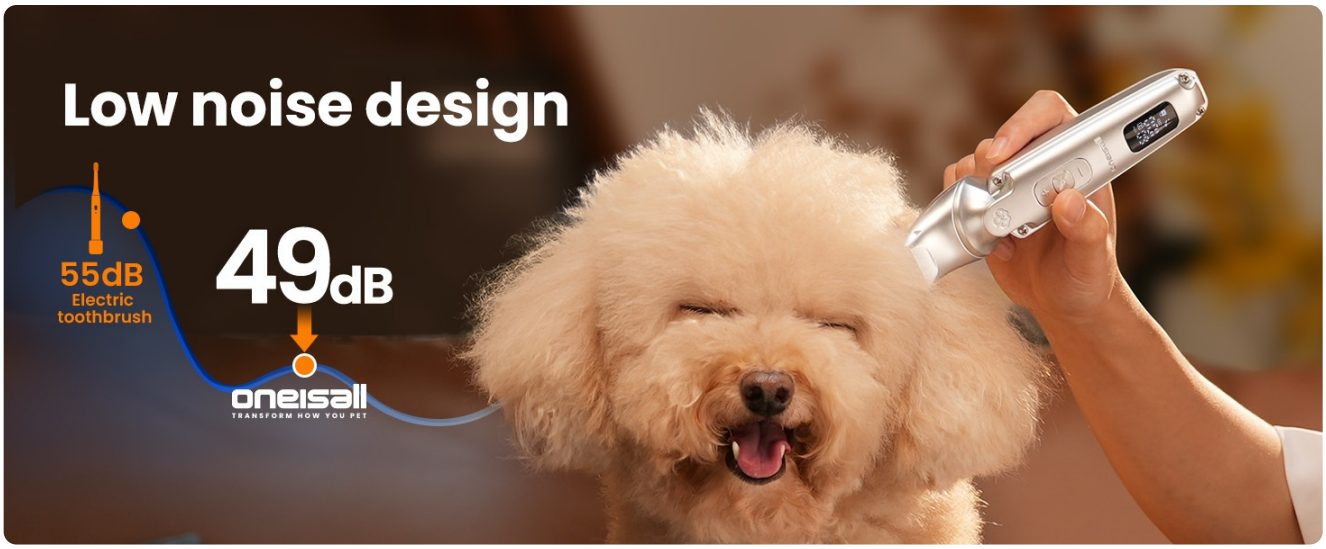


Figure 4: Illustration of the 3-speed control feature, allowing adjustment of RPMs for different grooming needs and pet sensitivities.

4.2 Standard Clipping (Body Hair)

Attach the standard blade head. Select the appropriate guide comb (3mm, 6mm, 9mm, or 12mm) based on the desired hair length. For thick coats, start with a higher speed and ensure the blades are clean and oiled for smooth gliding. Move the clippers in the direction of hair growth for an even trim.



Figure 5: A selection of guide combs, demonstrating the different lengths available for customized grooming.

4.3 Paw Trimming

Use the paw trimmer blade head for delicate areas like paws. This precision carving head is designed to reach deep into crevices for thorough and safe trimming of paw fur. The curved head with a 3mm guard comb can also be used to prevent over-trimming in sensitive areas.



Figure 6: Visual comparison of a pet's paw before and after trimming with the specialized paw trimmer head, highlighting its effectiveness.

4.4 Nail Grinding

Attach the nail grinder head. Gently introduce your pet's nail to the grinding surface. Use a low speed initially and gradually increase if needed. Grind the nail in short intervals to avoid overheating and to prevent grinding too far down, which can cause discomfort to your pet.

5. Maintenance

5.1 Cleaning

The oneisall grooming unit is IPX7 waterproof, allowing for easy cleaning. After each use, remove the blade head and rinse it under running water. Use the provided cleaning brush to remove any trapped hair from the blades and the unit. Ensure the unit is completely dry before reattaching the head or storing.

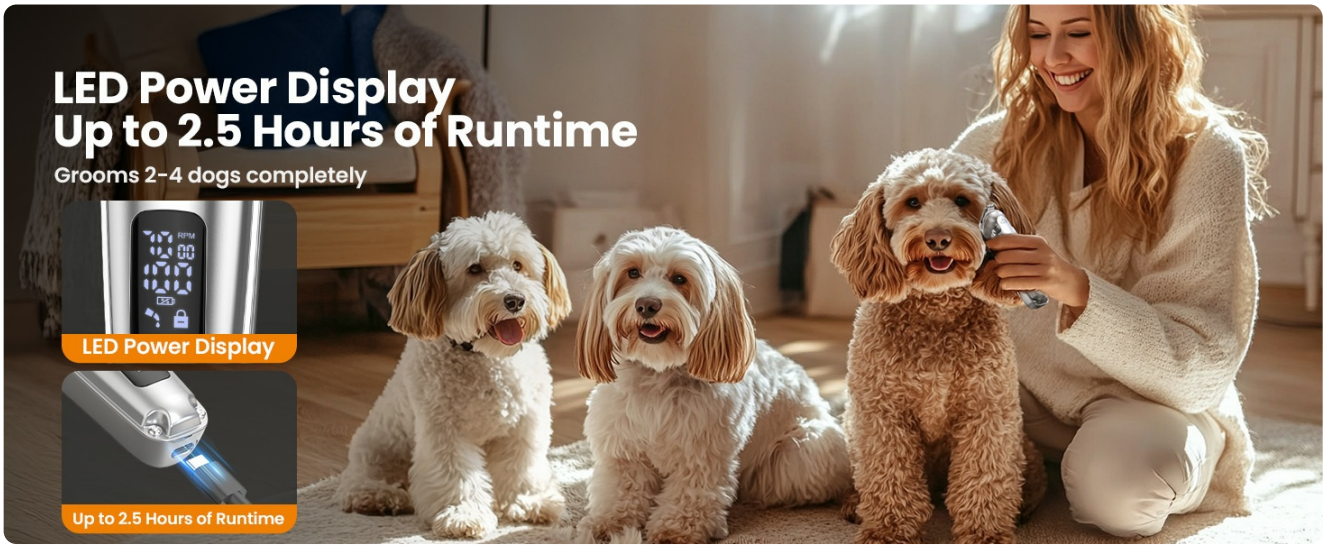


Figure 7: The grooming unit demonstrating its IPX7 waterproof capability, allowing for easy and thorough cleaning under running water.

5.2 Lubrication

Regularly apply a few drops of the provided lubricating oil to the blades to maintain optimal performance and extend their lifespan. This helps the blades glide smoothly and prevents overheating.

6. Troubleshooting

- **Unit not turning on:** Ensure the unit is fully charged.
- **Blades pulling hair or not cutting effectively:** The blades may be clogged with hair or require lubrication. Clean the blades thoroughly and apply oil. For very thick or matted hair, you may need to clear the blades frequently.
- **Excessive noise or vibration:** Ensure the blade head is securely attached. Clean and lubricate the blades.
- **Heads detaching during use:** Ensure the head is properly clicked into place. If issues persist, contact customer support.

7. Specifications

Feature	Specification
Model Number	FC09
Battery Capacity	1400mAh
Runtime	Up to 2.5 hours
Speed Levels	3 (6000 RPM, 6500 RPM, 7000 RPM)
Waterproof Rating	IPX7
Noise Level	As low as 49dB
Charging Interface	USB Type-C
Dimensions	7.24 x 5.79 x 2.13 inches

Weight	1.01 Pounds

8. Warranty and Support

The oneisall Dog Grooming Kit comes with a 2-Year Warranty. For any product inquiries, troubleshooting assistance, or warranty claims, please contact oneisall customer support through their official channels or the retailer where the product was purchased.

© 2024 oneisall. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0DMV8L8DB

More documents and user manuals: **https://manuals.plus/**